ALL DIMENSIONS IN METERS EXCEPT PAY ITEMS AND UNLESS NOTED OTHERWISE

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80/94	2626.2-R-1	COOK	452	12
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

CONTRACT NO. 62113 INDOT DES. NO. 0100987

EXISTING MEDIAN

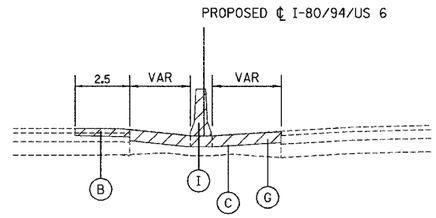

STA 7+600 TO STA 7+925
STA 8+775 TO STA 9+250

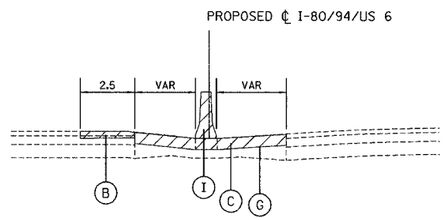

STA 7+925 TO STA 8+175

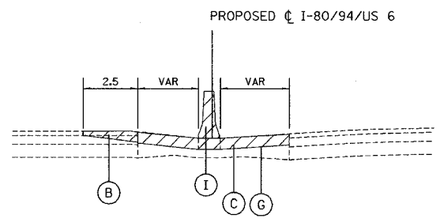

STA 8+250 TO STA 8+400

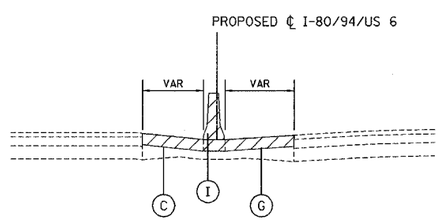

STA 8+600 TO STA 8+725

PROPOSED MEDIAN

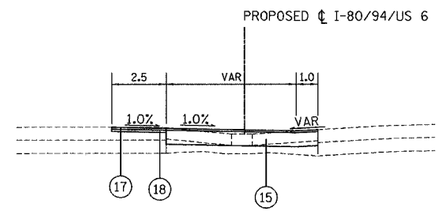

STA 7+600 TO STA 7+925
STA 8+775 TO STA 9+250

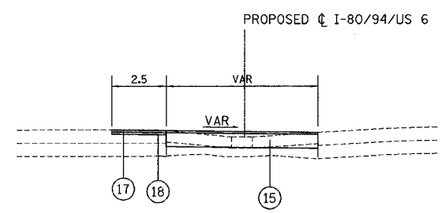

STA 7+925 TO STA 8+175

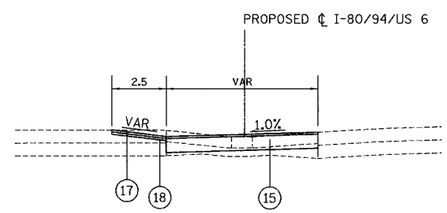

STA 8+250 TO STA 8+400

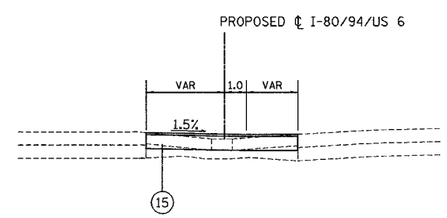

STA 8+600 TO STA 8+725

EXISTING LEGEND

A BITUMINOUS SURFACE REMOVAL 95MM
B BITUMINOUS SURFACE REMOVAL (VARIABLE DEPTH)
C PAVED SHOULDER REMOVAL
D BITUMINOUS OVERLAY (150MM & VAR)
E PORTLAND CEMENT CONCRETE PAVEMENT (275MM & VAR)
F AGGREGATE SUBGRADE (300MM & VAR)
G BITUMINOUS PAVEMENT (250MM & VAR)
H BITUMINOUS PAVEMENT (400MM & VAR)
I CONCRETE BARRIER
J EXISTING TOPSOIL (200MM & VAR)
K RETAINING WALL (TO BE CONSTRUCTED BY OTHER)
L PAVEMENT UNDERDRAINS (LOCATIONS UNCERTAIN)
REMOVAL ITEM

PROPOSED LEGEND

1 EARTH EXCAVATION
2 EARTH EXCAVATION (SPECIAL)
3 EMBANKMENT
4 GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
5 TOPSOIL FURNISH AND PLACE, XXX MM & SEEDING, CLASS 2A
6 TEMPORARY EROSION CONTROL SEEDING
7 SUB-BASE GRANULAR MATERIAL, TYPE B 300MM
8 STABILIZED SUB-BASE 150MM
9 CONTROLLED LOW-STRENGTH MATERIAL
10 CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT 360MM
11 PAVEMENT REINFORCEMENT 360MM
12 PORTLAND CEMENT CONCRETE SHOULDERS - 360MM
13 PIPE UNDERDRAINS 150MM
14 STEEL PLATE BEAM GUARDRAIL, TYPE A
15 SHORT TERM PAVEMENT SUPERPAVE (FULL DEPTH)
16 WHITEWASHING FOR CONCRETE PAVEMENT
17 POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "F", N105 45MM
18 BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N105 50MM & VAR
19 TEMPORARY SHEET PILING (REMAIN IN PLACE) (SEE STRUCTURE PLANS)
20 TEMPORARY CONCRETE BARRIER (OF THE TYPE SPECIFIED)
21 RETAINING WALL (THIS CONTRACT)

LONGITUDINAL JOINTS (LJ) (INCLUDED IN THE COST OF CRC PAVEMENT OR PCC SHOULDER)
CONSTRUCTION JOINT W/ NO. 25 DEFORMED TIE BARS (EPOXY COATED) 600 mm LONG AT 600 mm CTRS, GROUT IN PLACE
SAWED JOINT W/ NO. 20 DEFORMED TIE BARS (EPOXY COATED) 750 mm LONG AT 750 mm CTRS

BRIDGE OMISSIONS: STA 8+193.7 TO 8+246.2 HOHMAN AVE BRIDGE
STA 8+410.9 TO 8+599.1 LITTLE CAL BRIDGE
STA 8+726.7 TO 8+781.0 HARRISON ST BRIDGE

MEDIAN DETAILS

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
I-80/94/US 6
KINGERY-BORMAN EXPRESSWAY
BURNHAM ROAD TO US 41
TYPICAL SECTIONS
I-80 /94 /US-6

SCALE NTS DRAWN BY ACE/CAD
DATE 07/04 CHECKED BY TAE

AMERICAN CONSULTING ENGINEERS

..\Sheets\tc140244a.dgn 07/01/2004 08:21:56 AM