STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

Sheet No. 8 of 16 Sheets

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SBI 88	103C-BR	BUREAU	51	19
FED.ROAD DIST.NO.		ILLINOIS	PROJECT	

CONTRACT #64423

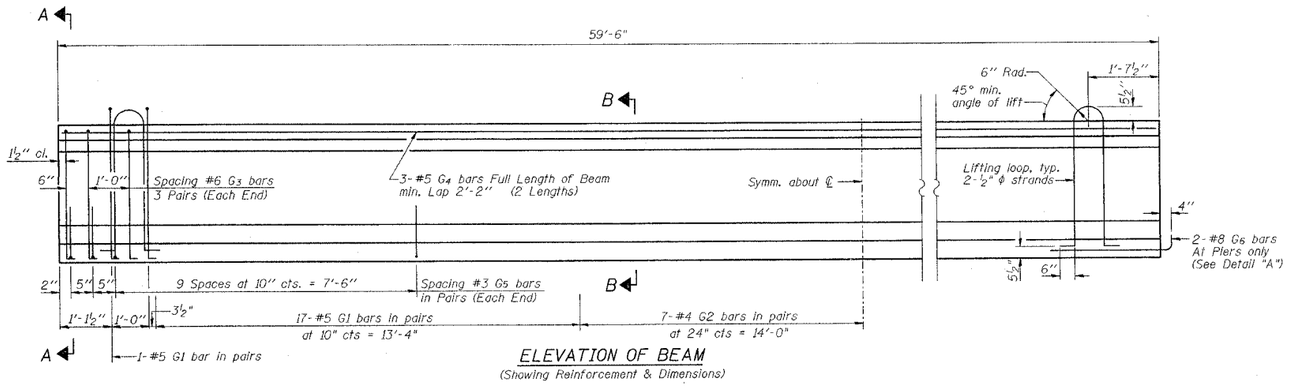

ELEVATION OF BEAM
(Showing Reinforcement & Dimensions)



SECTION A-A



SECTION B-B

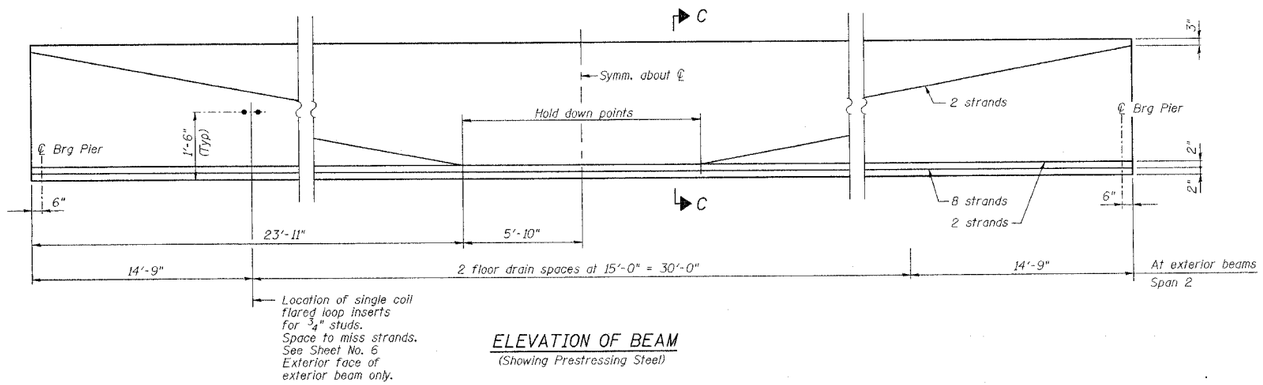

ELEVATION OF BEAM
(Showing Prestressing Steel)



BARS G1 & G2



BAR G3



SECTION C-C



BAR G5



BAR G6

*BAR LIST

Bar	No.	Size	Length	Shape
G_1	72	#5	4'-2½"	⅂L
G_2	28	#4	4'-2½"	⅂L
G_3	12	#6	3'-7"	⅂L
G_4	6	#5	30'-9"	—
G_5	48	#3	2'-7"	⊂
G_6	4	#8	3'-6"	⊂⊃

*For one beam only.

BILL OF MATERIAL

Item	Unit	Total
Furnishing and Erecting Precast Prestressed Concrete I-Beams, 36"	Ft.	297.5



ELEVATION



PLAN

DETAIL "A"



½" FABRIC BEARING PAD
(10 req'd - Span 2)

NOTES

Inserts for ¾" ϕ threaded dowel rods are to be two strut, coil type for interior I-Beams and single coil, flared loop type for exterior I-Beams.
Prestressing steel shall be uncoated high strength, low relaxation 7-wire strand, Grade 270.
The nominal diameter shall be ½" and the nominal cross-sectional area shall be 0.153 sq. in.
Non-prestressing steel shall conform to AASHTO designation M-31 or M-322 Grade 60.
Lifting loops shall be 2-½"ϕ-270 ksi strands, as shown.
Required release strength, f'ci, shall be 5000 psi.
Reinforcement bars designated (E) shall be epoxy coated.
See Sheet No. 2 for moment tables.

NEW BEDFORD ROAD OVER GREEN RIVER

BEAM DETAILS - SPAN 2

REVISIONS		
No.	DATE	INITIALS
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SBI 88 SPUR — SECTION 103C-BR
SN 006-0163
STA 29+25.34 — BUREAU COUNTY

HOMER L. CHASTAIN & ASSOCIATES, LLP
CONSULTING ENGINEERS
184-001397

	DATE
DRAWN BY: R King	4/04
CHECKED BY: CMV	4/04
DATE BY: CWC	4/04
BOOK NUMBER	
PROJECT No.	4858-1
SHEET No.	

PI-4-36 9-1-03