SHEET NO. 16 21 SHEETS

Contract #78006

## NOTES

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars. Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length.

All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.

Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:

- Minimum Capacity =  $1.25 \times fy \times A_t$


(Lension III Kips)

Minimum \*Pull-out Strength = 0.66 x fy  $x A_{t}$ (Tension in kips)

Where fy = Yield strength of lapped reinforcement bars in ksi.  $\dot{A_t}$  = Tensile stress area of lapped reinforcement bars. \* = 28 day concrete

		American management of the contract of the con	and the state of t	
BAR SPLICER ASSEMBLIES				
		Strength Requirements		
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	1 1 1 1 1 1 1	Min. Pull-Out Strength kips - tension	
#4	1′-8′′	14.7	7.9	
#5	2′-0′′	23.0	12.3	
#6	2'-7"	33.1	17.4	
#7	3′-5″	45.1	23.8	
#8	4′-6′′	58.9	31.3	
#9	5′-9′′	75.0	39.6	
#10	7'-3"	95.0	50.3	
#11	9′-0′′	117.4	61.8	

- Stage Construction Line

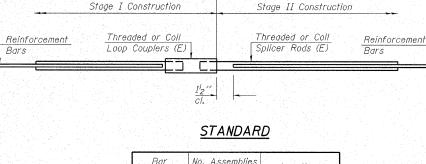

Bar Size	No. Assemblies Required	Location
#5	239	Slab
#7	12	N. Abut.
#7	12	S. Abut.
#7	12	Pier 1
#5	12	Pier 1
#7	12	Pier 2
#5	12	Pier 2
#7	12	Pier 3
#5	12	Pier 3


HAMPTON, LENZINI & RENWICK, INC.
CIVIL & STRUCTURAL ENGINEERS
LAND SURVEYORS

3085 STEVENSON DRIVE, SUITE 201 SPRINGFIELD, ILLINOIS 62703 (217) 546-3400

ELGIN . SPRINGFIELD PROJECT NUMBER: 12-41-0021-i DATE: 10/25/07 SIGNED: R.J.P. CHECKED: S.W.M. DRAWN: D.A.B.

BAR SPLICER ASSEMBLY DETAILS IL RTE. 142 OVER CONTRARY CREEK (SOUTH OVERFLOW) F.A.P. ROUTE 776 - SECTION (116BR-3)B-1 HAMILTON COUNTY


STRUCTURE NO. 033-0052 / STATION 544+53.10



ROLLED THREAD DOWEL BAR \*\* ONE PIECE - Wire Connector WELDED SECTIONS

## BAR SPLICER ASSEMBLY ALTERNATIVES

\*\* Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

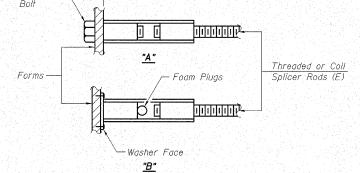


- Stage Construction Line

Template

## INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

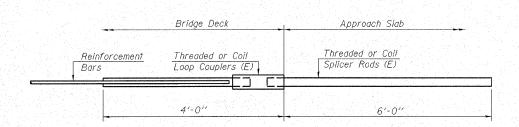

## FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

Bar Splicer for #5 bar Min. Capacity = 23.0 kips - tension Min. Pull-out Strength = 12.3 kips - tension No. Required =

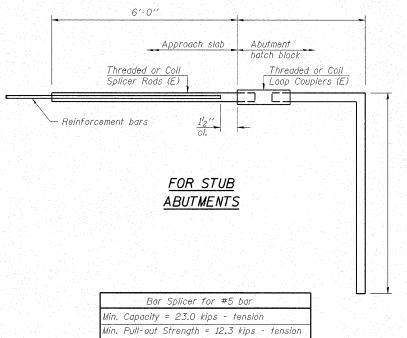

Vo. Required =