


GENERAL NOTES:

Plan Dimensions and Details Relative to Existing Plans are Subject to Nominal Construction Variations. The Contractor Shall Field Verify Existing Dimensions and Details Affecting new Construction and Make Necessary Approved Adjustments Prior to Construction or Ordering of Materials. Such Variations Shall not be Cause for Additional Compensation for a Change in Scope of the Work, However, the Contractor will be Paid for the Quantity Actually Furnished at the Unit Price Bid for the Work.

These Plans Have Been Prepared From Notes Received From I.D.O.T. Field Maintenance Engineers.

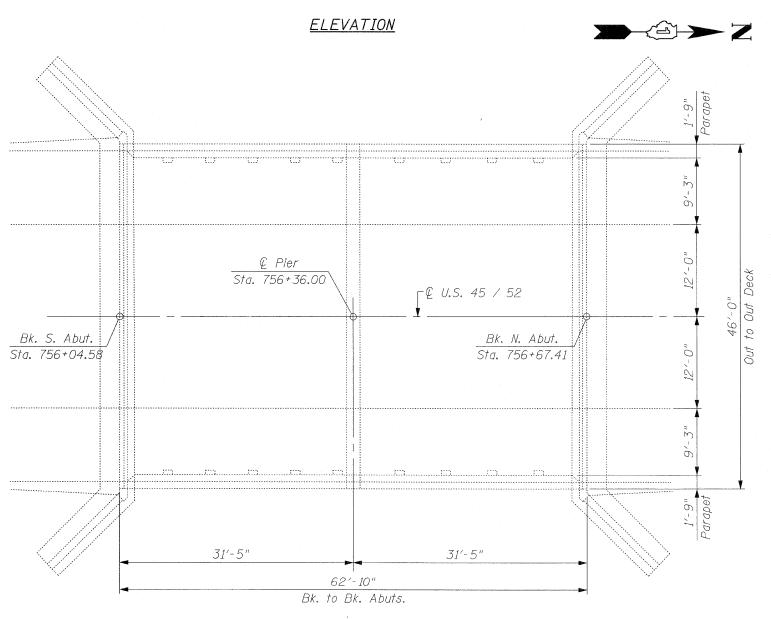

TOTAL BILL OF MATERIAL

· ·	ŀ		
ITEM	UNIT	QUANTITY	
Bridge Deck Hydro-Scarification, ¹ 2 Inch	Sq. Yd.	293	
Bridge Deck Latex Concrete Overlay, 2 ^l ₄ Inches	Sq. Yd.	293	
Deck Slab Repair (Full Depth, Type II)	Sq. Yd.	15	
Bridge Deck Grooving	Sq. Yd.	283	
Structural Repair of Concrete (Depth Equal to or Less Than 5 Inches)	Sq. Ft.	125	
Protective Coat	Sq. Yd.	293	

<u>PLAN</u>



CHRISTIAN-ROGE & ASSOCIATES, INC.
ENGINEERS / PLANNERS / SURVEYORS
211 W. WACKER DRIVE CHICAGO, IL. 60606
PHONE: (312)372-2023 FAX: (312)372-5274

							•••••		
FILE NAME =	USER NAME = IDOT	DESIGNED - B.N.S.	REVISED -		PLAN & ELEVATION	F	A.P. SECTION	COUNTY	TOTAL SHEET
plan_elev.sht		DRAWN - D.L./R.E.S./F.M.	REVISED -	STATE OF ILLINOIS	U.S. 45 / 52 OVER SOUTH BRANCH FORKED CREEK	H	330 17 B-2-I-1	WILL	21 11
	PLOT SCALE = 50.0000 '/ IN.	CHECKED - B.N.S./S.J.P./J.C.N.	REVISED -	DEPARTMENT OF TRANSPORTATION		. 099–0121			T NO. 60D79
	PLOT DATE = 1/12/2009	DATE - JANUARY 12, 2009	REVISED -		SCALE: SHEET NO. S1 OF S6 SHEETS STA. TO STA.	F	FED. ROAD DIST. NO. 1 ILLINOIS FED. 1		1 1101 00013