

CONTRACT NO. 62532

GENERAL NOTES FOR EROSIOIN CONTROL

-PRIOR TO START OF CONSTRUCTION IN ANY AREA INSTALL PERIMETER EROSION BARRIER AT LOCATIONS SHOWN ON THE PLANS.

-THE PERIMETER EROSION BARRIER SHALL REMAIN IN PLACE UNTIL ALL DISTURBED AREAS HAVE BEEN STABILIZED WITH VEGETATION. AT THIS TIME, THE PERIMETER EROSION BARRIER SHALL BE REMOVED AND AREAS DAMAGED BY THE FENCE INSTALLATION RESTORED.

-ALL TEMPORARY EROSION CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED. ALL DISTURBED SOIL AREAS SHALL BE PERMANENTLY STABILIZED.

-ALL TEMPORARY AND PERMANENT EROSION CONTROL MEASURES MUST BE MAINTAINED AND REPAIRED AS NEEDED. THE GENERAL CONTRACTOR WILL BE RESPONSIBLE FOR INSPECTION AND REPAIR DURING CONSTRUCTION.

<u>LEGEND</u>


PERIMETER EROSION BARRIER

 $\bigoplus$ 

INLET & PIPE PROTECTION

EROSION CONTROL

LANDSCAPING

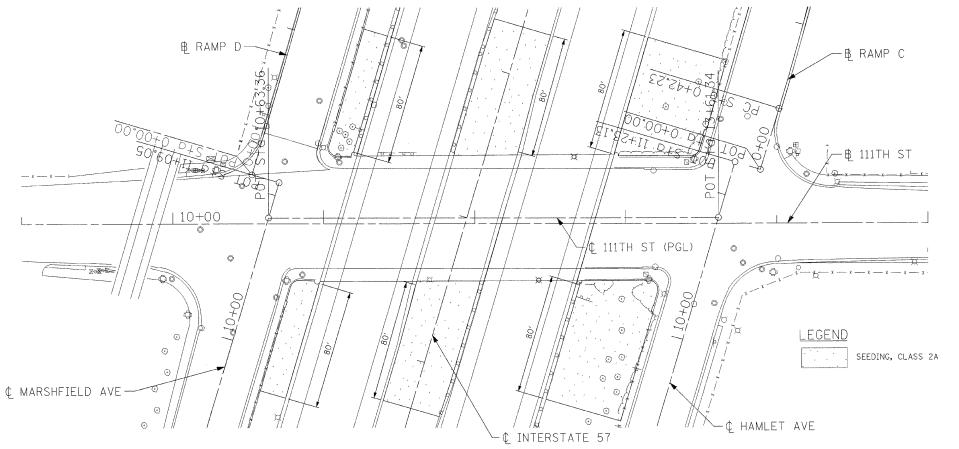

ILLINOIS DEPARTMENT OF TRANSPORTATION 111TH STREET OVER F.A.I ROUTE 57 (INTERSTATE 57)

EROSION CONTROL AND LANDSCAPING

SCALE: 1"=30' DATE: 01/16/09 DRAWN BY: BRH CHECKED BY: ACL

TENG

TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS 205 N. MICHIGAN AVE. CHICAGO, IL 60601 TELEPHONE: 312/616-0000