## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION


\*\*Wood blocks

`−#5 bars

DETAIL II

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 9
FAI 74	*	ROCK ISLAND	246	176	10 SHEETS
FEO. ROAD DIST. NO. 7		ILLINOIS FED. AID PR	INGIS FED. AID PROJECT-		

\* 81 (1-2, 1, 2-2) RS-1 & M

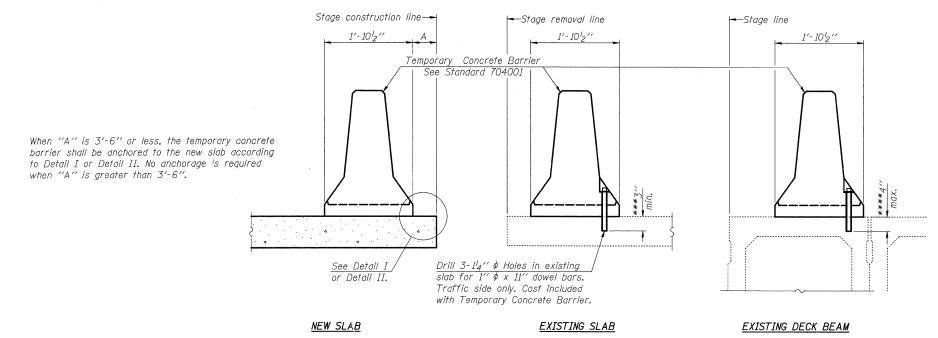

## NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) 1"x7"x10" steel  $\mathbb R$  to the top layer of couplers with  $2^{-5}8$ "  $\phi$  bolts screwed to coupler at approximate  $\mathbb Q$  of each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1"x7"x10" steel £ to the concrete slab or concrete wearing surface with 2-5g"\$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate £ of each parrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.

The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

## SECTIONS THRU SLAB OR DECK BEAM

\*\*\*Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.


Extended #5 bars

2-5<sub>8</sub>" ♦ Expansion Anchors or


cast in place inserts with a certified min. proof load of

5,000 Lbs.

\*\*\*\*If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

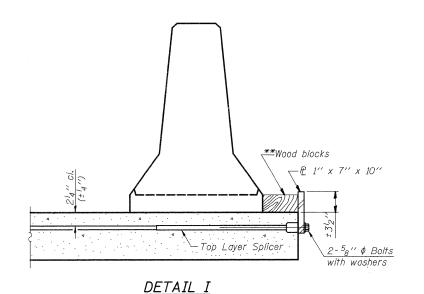

\*\*Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.



## STEEL RETAINER P 1" x 7" x 10"

\*Required only with Detail II

TEMPORARY CONCRETE BARRIER

FOR STAGE CONSTRUCTION

F.A.I. 74 (OVER 19TH ST.)

ROCK ISLAND COUNTY

STRUCTURE NO. 081-0103

DESIGNED	DFM
CHECKED	DSG
DRAWN	EBS
CHECKED	DFM

ECKED DFM 5-16-08