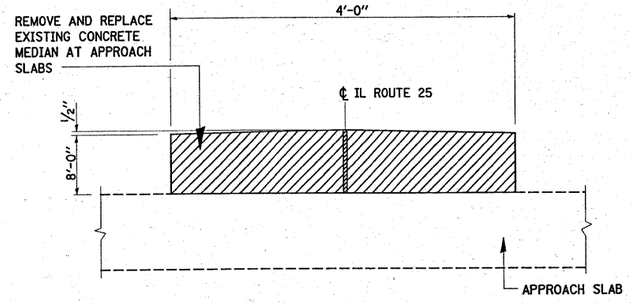

EXISTING APPROACH SLAB MEDIAN
(TYPICAL)

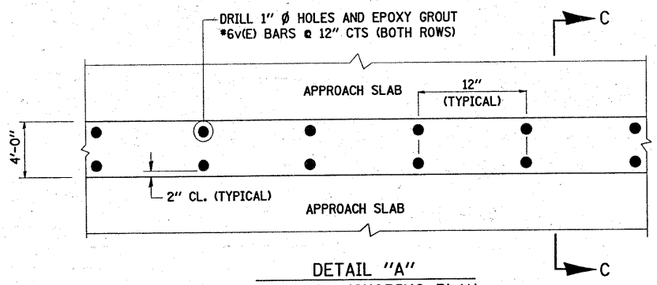

DETAIL "A"
MEDIAN ANCHORING PLAN

BILL OF MATERIALS (*)

BAR	NO.	SIZE	LENGTH	SHAPE
h(E)	8	*4	29'-9"	——
v(E)	124	*6	2'-0"	Γ
u(E)	62	*5	4'-6"	Π

ITEM	UNIT	QUANTITY
REINFORCEMENT BARS (EPOXY COATED)(*)	POUND	823
CONCRETE SUPERSTRUCTURE (*)	CU. YDS.	6
DRILL 1" Ø HOLES (*)	EACH	124

(*) FOR INFORMATION ONLY. COST INCLUDED IN CONCRETE MEDIAN SURFACE, 8".

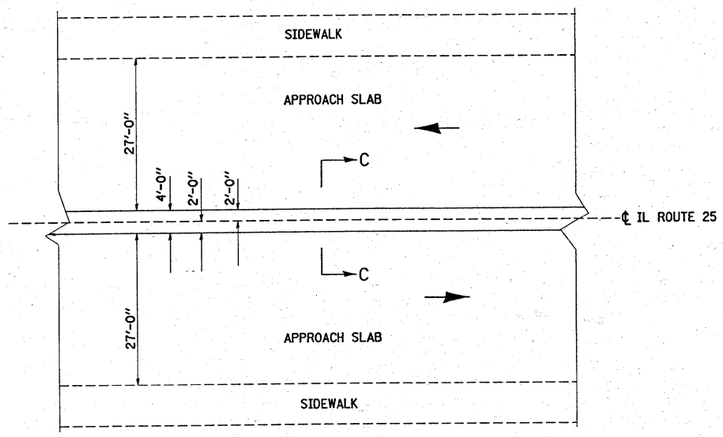

PROPOSED MEDIAN SURFACE

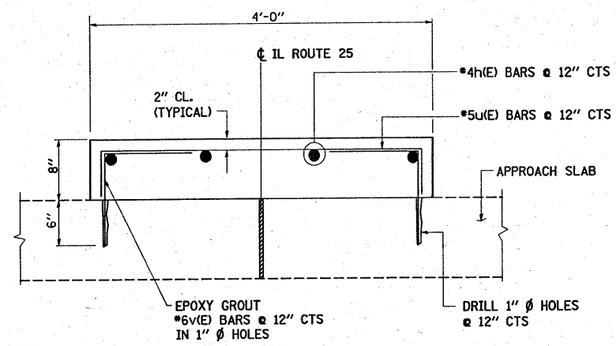

SECTION "C-C"
CONCRETE MEDIAN SURFACE, 8 INCHES
(PROPOSED - TYPICAL)



BARS u(E)



BARS v(E)

FILE NAME = c:\pw_work\PWIDOT\BANKSL\dms88316\sh_rdy_design.dgn	USER NAME = banksl	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 50.0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 1/30/2009	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ILL. RTE. 25 (DUNDEE ROAD) OVER I-90 N.W. TOLLWAY
CONCRETE MEDIAN SURFACE S.N. 045-0042

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
360	(54 & 56) RS-6	KANE/COOK	37	18

CONTRACT NO. 62847
ILLINOIS FED. AID PROJECT