



STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION



Contract Number: 74119

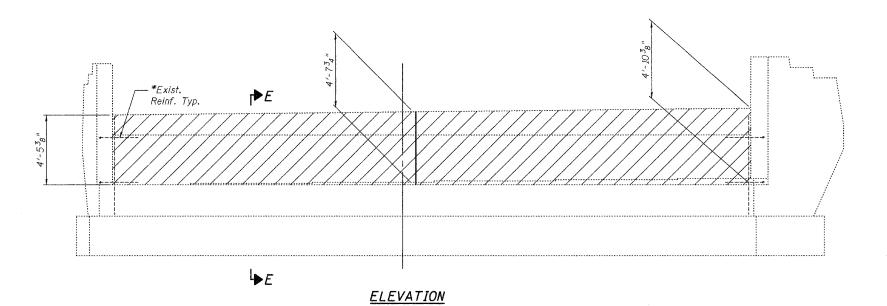

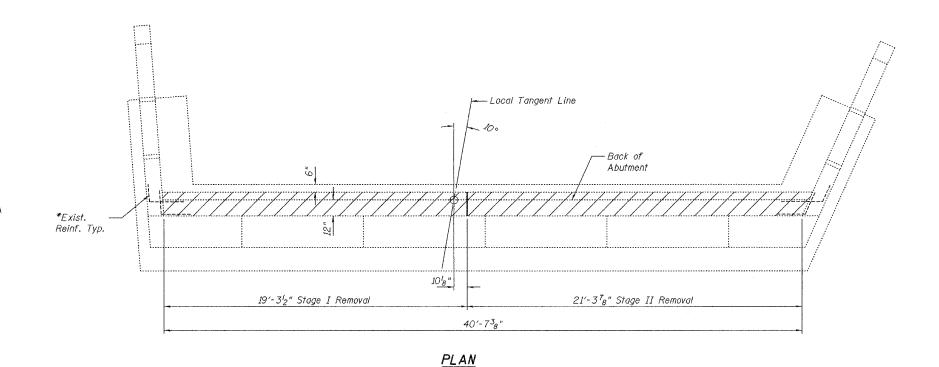

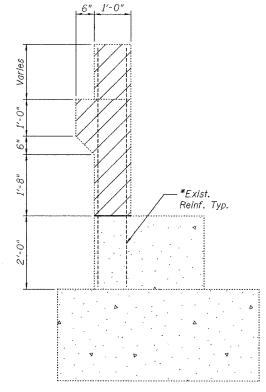

SECTION E-E

Notes:

Hatched areas indicate Concrete Removal.

*Existing reinforcement extending into the removal area shall be cleaned, straightened and incorporated into the new construction. Any reinforcement bars that are damaged during concrete removal shall be replaced with an approved bar splicer or anchorage system. Cost shall be included with Concrete Removal.

DESIGNED A.T.H. CHECKED S.J.B. DRAWN Drew Christopher CHECKED A.T.H. S.J.B.

March 6, 2006

SOUTH ABUTMENT CONCRETE REMOVAL F.A.I. RT. 57 SOUTH BOUND OVER GREEN CREEK EFFINGHAM COUNTY SN 025-0004