


EROSION CONTROL LEGEND

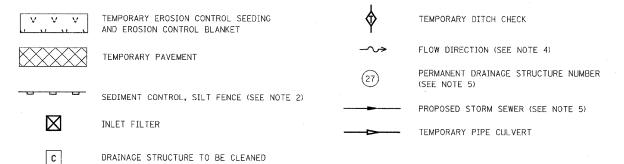


NOTES

- 1. THE CONSTRUCTION LIMITS WILL BE STAKED BY THE ENGINEER
 PRIOR TO COMMENCING CONSTRUCTION.
 THE CONSTRUCTION LIMITS MAY BE ADJUSTED BY THE ENGINEER TO
 PRESERVE TREES AND NO ADDITIONAL COMPENSATION WILL BE PAID
 TO THE CONTRACTOR FOR CHANGED CONSTRUCTION LIMITS.
- SEDIMENT CONTROL, SILT FENCE SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- 3. SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- 4. SEE PRE-STAGE 1 CROSS SECTIONS FOR GRADING INFORMATION.
- 5. SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION.

6. TEMPORARY PIPE CULVERT SHALL BE TEMPORARILY CONNECTED TO PROPOSED MANHOLE OR SEWER, COST OF TEMPORARY CONNECTION SHALL BE CONSIDERED INCLUDED IN THE UNIT PRICE OF "PIPE CULVERT, CLASS C, TYPE 1, 12". (TEMPORARY)".

7. PROPOSED STRUCTURE SHALL BE BURIED AND TEMPORARILY COVERED WITH STEEL PLATE OF 0.25 INCH MINIMUM THICKNESS OR OF THICKNESS SPECIFIED AND APPROVED BY THE ENGINEER. PAYMENT FOR THE INSTALLATION AND REMOVAL OF THE STEEL PLATE INCLUDING ANY REQUIRED EXCAVATION SHALL BE CONSIDERED INCLUDED IN THE COST OF THE PROPOSED STRUCTURE.



ILLINOIS DEPARTMENT OF TRANSPORTATION
DISTRICT NO. 1 SCHAUMBURG
EROSION CONTROL PLAN
PRE-STAGE 1, 1A AND 1B
ILLINOIS ROUTE 59

SCALE AS SHOWN
DATE MARCH 18, 2008

DRAWN BY BSB CHECKED BY HME