


REF-
REF-
REF-

CONTROLLER SEQUENCE

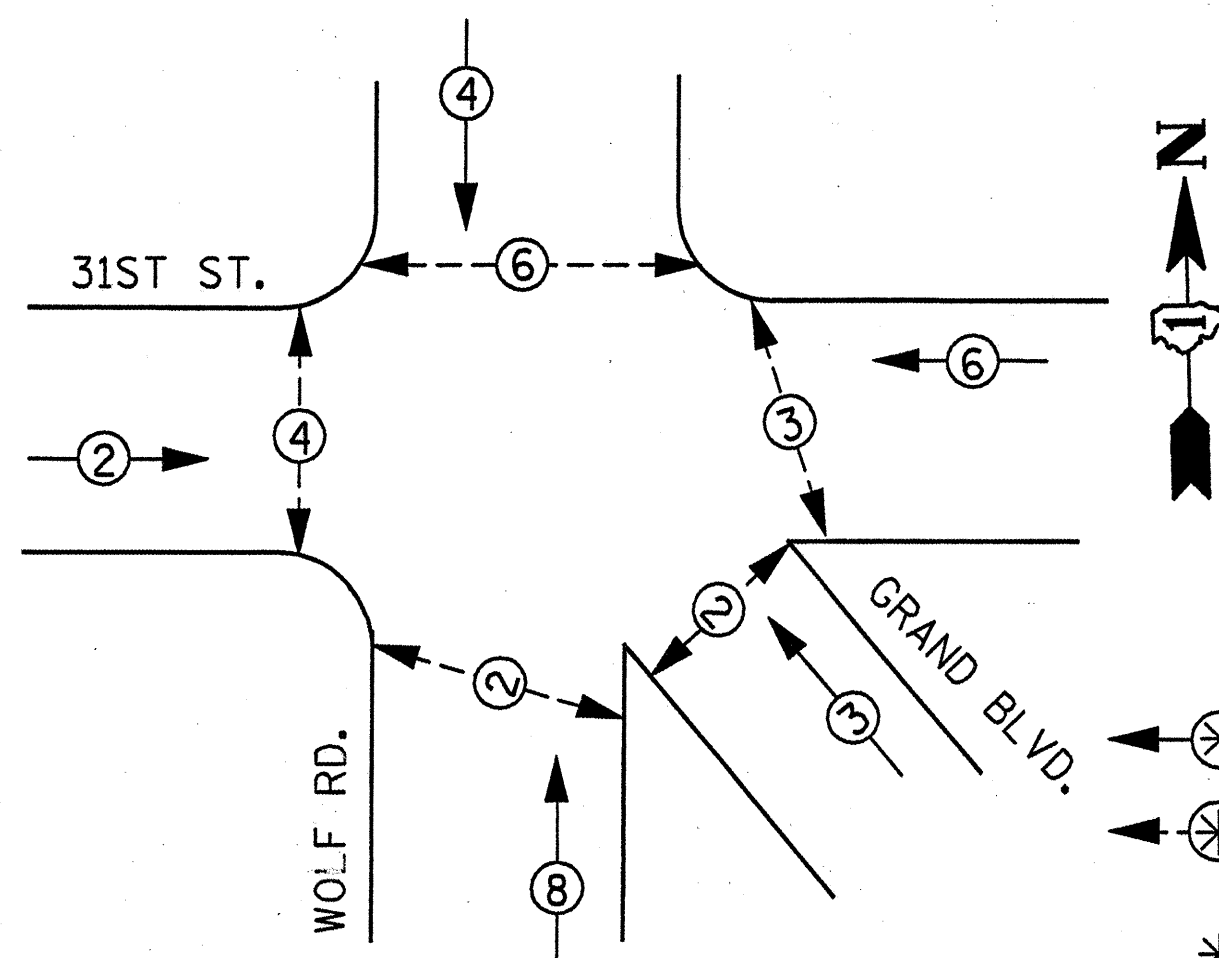

PHASE DESIGNATION DIAGRAM

THE FOLLOWING EXISTING TRAFFIC SIGNAL EQUIPMENT SHALL BE REMOVED BY THE CONTRACTOR, SHALL REMAIN THE PROPERTY OF THE STATE AND SHALL BE DELIVERED BY THE CONTRACTOR TO THE STATE'S TRAFFIC SIGNAL MAINTENANCE CONTRACTOR'S MAIN FACILITY AS PER THE TRAFFIC SIGNAL SPECIFICATION.

1 EACH CONTROLLER AND CABINET, COMPLETE

THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND SHALL BE DISPOSED OF BY THEM OUTSIDE OF THE RIGHT-OF-WAY AT THEIR EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACTOR BID PRICE.

7 EACH SIGNAL HEAD, 1 FACE, 3 SECTION
1 EACH SIGNAL HEAD, 1 FACE, 5 SECTION
2 EACH SIGNAL HEAD, 2 FACE, 3 SECTION
1 EACH SIGNAL HEAD, 2 FACE, 1-3 SECTION, 1-5 SECTION
1 EACH SIGNAL HEAD, 3 FACE, 3 SECTION
4 EACH SIGNAL HEAD BACK-PLATE
4 EACH PEDESTRIAN SIGNAL HEAD, 1 FACE
3 EACH PEDESTRIAN SIGNAL HEAD, 2 FACE
1 EACH SERVICE INSTALLATION

LEGEND

DUAL ENTRY PHASE
PEDESTRIAN PHASE
NUMBER REFERS TO ASSOCIATED PHASE

NOTE: THE END OF THE TRACER CABLE SHALL BE CONTINUOUS AND EXTEND INTO THE CONTROLLER CABINET

PROPOSED INTERCONNECT TO FOREST ROAD (SEE INTERCONNECT PLANS)

SCHEDULE OF QUANTITIES

QUANTITY UNIT ITEM

0.09	L	SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501
0.09	L	SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701
0.09	L	SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801
1.00	EACH		MAINTENANCE OF EXISTING TRAFFIC SIGNAL INSTALLATION
1.00	EACH		PAINT EXISTING TRAFFIC SIGNAL EQUIPMENT
1.00	EACH		FULL-ACTUATED CONTROLLER AND TYPE IV CABINET
6.00	EACH		PEDESRIAN PUSH-BUTTON
1.00	EACH		TRANSCEIVER-FIBER OPTIC
1.00	EACH		REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT
19.60	METER		CONDUIT PUSHED, 50MM DIA., GALVANIZED STEEL
17.40	METER		CONDUIT PUSHED, 65MM DIA., GALVANIZED STEEL
209.00	METER		ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C
384.00	METER		ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C
67.00	METER		ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C

FOUNDATION (DEPTH)	FT. (m)	CABLE SLACK	FT. (m)	VERTICAL	FT. (m)
TYPE A - POST	4 (1.2)	HANDHOLE	6.5 (2.0)	ALL FOUNDATIONS	3.5 (1.0)
D - CONTROLLER	4 (1.2)	DOUBLE HANDHOLE	13 (4.0)	MAST ARM (L) POLE	20'+L-2=
E - M. ARM POLE		SIGNAL POST	2 (1.0)	(6m+L-0.6m)=	
24" (600mm)	10 (3.0)	CONTROLLER CAB.	1 (0.5)	BRACKET MOUNTED	13 (4.0)
30" (750mm)	15 (4.6)	FIBER OPTIC	13 (4.0)	PED. PUSHBUTTON	4 (1.2)
		ELECTRIC SERVICE	1 (0.5)	ELECTRIC SERVICE	13.5 (4.1)
		GROUND CABLE	1 (0.5)	SERVICE TO GROUND	13.5 (4.1)
				POST MOUNTED	6 (1.8)

CABLE PLAN

QUANTITY UNIT ITEM

46.10	METER	ELECTRIC CABLE IN CONDUIT, SERVICE, NO. 6 2C
46.10	METER	ELECTRIC CABLE IN CONDUIT, GROUNDING, NO. 6 1C
40.00	METER	REMOVE ELECTRIC CABLE FROM CONDUIT
4.00	EACH	PEDESTRIAN SIGNAL HEAD, LED, 1-FACE, BRACKET MOUNTED
3.00	EACH	PEDESTRIAN SIGNAL HEAD, LED, 2-FACE, BRACKET MOUNTED
6.00	EACH	INDUCTIVE LOOP DETECTOR
4.00	EACH	TRAFFIC SIGNAL BACKPLATE, LOUVERED, ALUMINUM
3.00	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED
1.00	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, MAST ARM MOUNTED
4.00	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED
2.00	EACH	SIGNAL HEAD, LED, 2-FACE, 3-SECTION, BRACKET MOUNTED
1.00	EACH	SIGNAL HEAD, LED, 3-FACE, 3-SECTION, BRACKET MOUNTED
1.00	EACH	SIGNAL HEAD, LED, 2-FACE, 1-3 SECTION, 1-5 SECTION, BRACKET MOUNTED
1.00	EACH	SERVICE INSTALLATION, POLE MOUNT

NOTE:

RELOCATION OF THE LIGHT DETECTOR AMPLIFIER(S) FROM THE OLD CONTROLLER CABINET TO THE NEW CONTROLLER CABINET IS NECESSARY. THE COST OF THIS WORK SHALL BE INCIDENTAL TO THE COST OF THE NEW CONTROLLER AND CABINET.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1467	2000-044TS	COOK	32	18
STA.		TO STA.		
FED. ROAD DIST. NO. 1		ILLINOIS	FED. AID PROJECT	

CABLE PLAN LEGEND

EXISTING	PROPOSED	
		8" (200mm) TRAFFIC SIGNAL SECTION
		12" (300mm) TRAFFIC SIGNAL SECTION
		12" (300mm) PEDESTRIAN SIGNAL SECTION
		12" (300mm) PEDESTRIAN SIGNAL SECTION
		CONTROLLER CABINET
		SERVICE INSTALLATION
		TELEPHONE CONNECTION
		VEHICLE DETECTOR, INDUCTION LOOP
		MAGNETIC DETECTOR
		EMERGENCY VEHICLE LIGHT DETECTOR
		CONFIRMATION BEACON
		PUSHBUTTON DETECTOR
		DENOTES NUMBER OF CONDUCTORS, ALL CABLE NO. 14 EXCEPT AS INDICATED.
		ALL LOOP DETECTOR CABLE TO BE SHIELDED.
		GROUND CABLE IN CONDUIT NO. 6 SOLID COPPER (GREEN)
		FIBER OPTIC CABLE IN CONDUIT NO. 62.5/125 MM12F SM12F
		SIGNAL FACE WITH BACKPLATE, "P" INDICATES PROGRAMMED HEAD
		RAILROAD CONTROL CABINET
		ILLUMINATED SIGN, FIBER OPTIC "NO LEFT TURN"
		ILLUMINATED SIGN, FIBER OPTIC "NO RIGHT TURN"
		GROUND ROD AT HANDHOLE (H), DOUBLE HANDHOLE (H), OR CONTROLLER (C).
		GROUND ROD AT POST (P), OR MAST ARM POLE (MA).
		GROUND ROD AT ELECTRIC SERVICE INSTALLATION

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
CABLE PLAN, PHASE DESIGNATION DIAGRAM,
EMERGENCY VEHICLE PREEMPTION SEQUENCE
AND SCHEDULE OF QUANTITIES

31ST STREET
AT
KEMMAN AVENUE &
GRAND BOULEVARD

SCALE: NONE
DATE: 12/11/2003

DRAWN BY: ROB
DESIGNED BY: SM
CHECKED BY: DAD

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL
TYPE	NO. LAMPS	WATTAGE INCAND.	WATTAGE LED	%OPERATION	WATTAGE
SIGNAL (RED)	17	135	17	0.50	144.50
(YELLOW)	17	135	25	0.25	106.75
(GREEN)	17	135	15	0.25	63.75
ARROW	4	135	12	0.10	4.80
PED. SIGNAL	10	90	25	1.00	250.00
CONTROLLER	1	100	100	1.00	100.00
ILLUM. SIGN		84		0.05	
FLASHER				0.50	
ENERGY COSTS TO: TOTAL =					669.30
ILLINOIS DEPARTMENT OF TRANSPORTATION 201 WEST CENTER COURT SCHAUMBURG, ILLINOIS 60196-1096 ENERGY SUPPLY CONTACT: MIKE STEVENS PHONE: 708-410-5117 COMPANY: COMMONWEALTH EDISON					
12/12/2003 c:\projects\118800\118800a.dwg BEACOMRD					