RTE. NO.	SECTION	COUNTY	TOTAL SHTS.	SHEET NO.
C.H. 39	01-00158-00-BR	MACON	13	1
FED. ROAD DIST. NO.	ILLINOIS	PROJECT BRS-115(48)		

91296

INDEX OF SHEETS

1 Cover Sheet
2 Summary of Quantities, General Notes, Typical Cross Sections and Details
3 Plan and Profile
4-7 Station Cross Sections
8 Storm Water Pollution Prevention Plan
9-13 Bridge Plans

LIST OF STANDARDS

Standard 000001-04	Standard symbols, abbreviations and patterns
Standard 280001-02	Temporary erosion control systems
Standard 515001-02	Name plate for bridges
Standard 630001-04	Steel Plate Beam Guardrail
Standard 630301-02	Shoulder Widening for Type 1 (Special) Guardrail Terminals
Standard 701011	Off-road moving operations, 2-l, 2-w, day only, for speeds > 45 mph
Standard 701301-01	Lane closure, 2-l, 2-w, short time operations
Standard 702001-03	Traffic control devices
Standard BLR-21-6	Typical application of traffic control devices for Construction on Rural Local Highways
Standard BLR-22-4	Typical application of traffic control devices 2-l, 2-w, rural, Road closed to Thru Traffic

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
PLANS FOR PROPOSED
LOCAL AGENCY IMPROVEMENT

SCALES
PLAN 0 50' 100'
PROFILE HORIZ. 0 50' 100'
PROFILE VERT. 0 5' 10'
CROSS SECTIONS HORZ. 0 20' 40'
CROSS SECTIONS VERT. 0 5' 10'

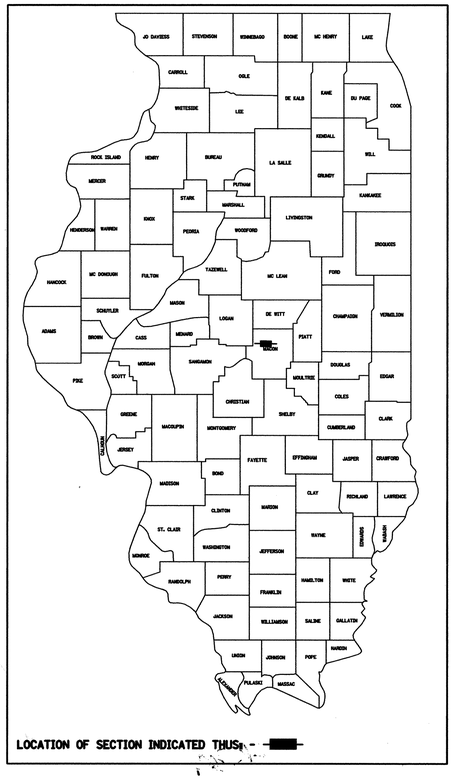

LOCATION OF SECTION INDICATED THUS:

ROADWAY CLASSIFICATION: URBAN COLLECTOR
2022 ADT = 2000 (0.9% TRUCKS)
2022 DHV = 200
DESIGN SPEED: 50 MPH
DESIGN GUIDELINES: RURAL
VARIANCES GRANTED: NONE
COMMITTMENTS: NONE

BRIDGE REPLACEMENT AND REHABILITATION PROGRAM
F.A.U. RT. 7354 (C.H. 39)
OVER SPRING CREEK
SECTION 01-00158-00-BR
MACON COUNTY
PROJECT ACBRS-115(48)

C-95-082-03

R2E, 3rd P.M.

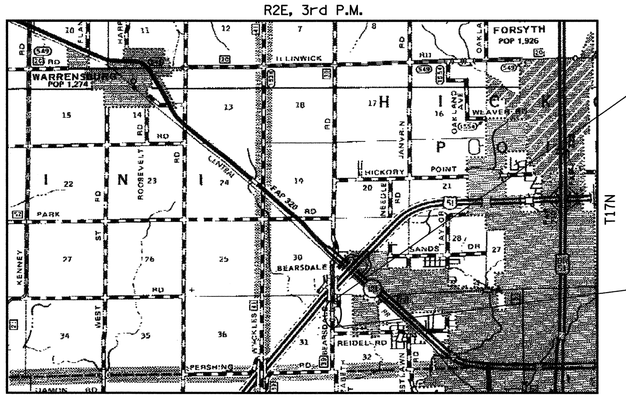

IMPROVEMENT ENDS
STA. 20+58.41

IMPROVEMENT BEGINS
STA. 11+45.11

JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS
J.U.L.I.E. Telephone No. Toll Free 1-800-892-0123

CONTRACT NO. : 91296

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	
APPROVED Oct. 31 20 03	COUNTY ENGINEER
PASSED 11/6 20 03	DISTRICT ENGINEER OF LOCAL ROADS AND STREETS
APPROVED 11-6 20 03	DISTRICT ENGINEER

URS
3040 N. UNIVERSITY AVE., SUITE ONE
DECATUR, ILLINOIS 62526-1343
PH. 217-875-4800

IMPROVEMENT CONSISTS OF THE REMOVAL OF A TWO-SPAN CONCRETE DECK ON STEEL BEAM STRINGERS, ON A TIMBER PIER WITH BRICK ABUTMENTS AND BRICK AND CONCRETE HEADWALLS, ±20'-0" O.-O. DECK, ±30'-9" BK.-BK. ABUTMENTS AND THE CONSTRUCTION OF A SINGLE SPAN PRECAST PRESTRESSED CONCRETE DECK ON CONCRETE SPILL-THRU ABUTMENTS. TOTAL LENGTH = 57'-2¼" BK.-BK. ABUTMENTS, WIDTH = 30'-0" O.-O. DECK AND NECESSARY APPROACH WORK.
EXIST. STR. NO. 058-3031. PROP. STR. NO. 058-3359.

LAYOUT

Approximate Scale: 1 0 1 scale miles

Total and Net Length of Improvement 913.30 Feet = 0.173 Miles

KEITH W. BENTING 062-043789 REGISTERED PROFESSIONAL ENGINEER STATE OF ILLINOIS Exp 11/30/05

Keith W. Benting
Illinois Professional No. 43789

10/31/03
Date