F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
614	(*)	MORGAN	200	31
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

(*) 147(RS-5, B-1, B-2) 92656

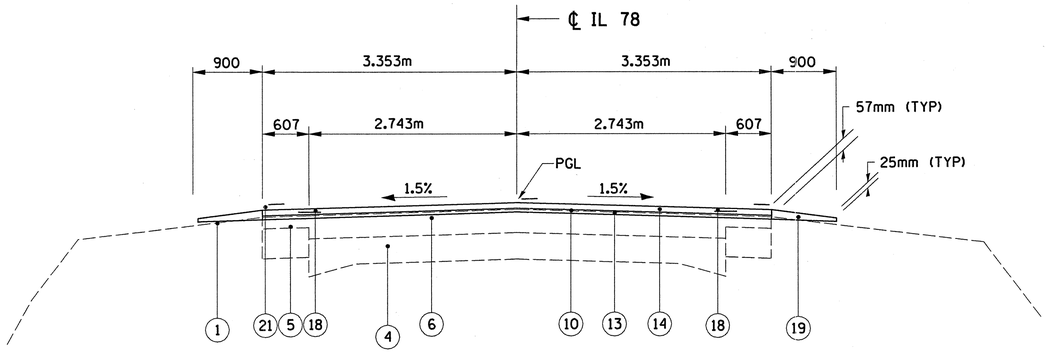

PROPOSED TYPICAL SECTION – 1

STA. 11+075.000 TO STA. 11+093.400
STA. 11+344.000 LT TO STA. 11+739.013 LT
STA. 11+352.000 RT TO STA. 11+739.013 RT
STA. 12+046.191 TO STA. 12+686.508
STA. 13+227.910 LT TO STA. 13+385.300 LT
STA. 13+228.564 RT TO STA. 13+385.300 RT
STA. 13+385.300 TO STA. 13+477.600 (BRIDGE OMISSION)
STA. 13+838.006 LT TO STA. 14+381.000 LT
STA. 13+866.163 RT TO STA. 14+380.000 RT
STA. 15+267.839 TO STA. 18+147.562

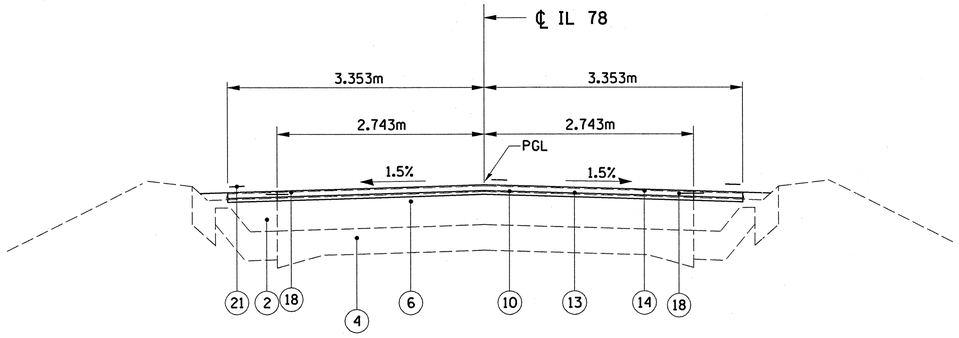

PROPOSED TYPICAL SECTION – 2

STA. 11+093.400 LT TO STA. 11+344.000 LT
STA. 11+093.400 RT TO STA. 11+352.000 RT
STA. 12+686.508 LT TO STA. 13+227.910 LT
STA. 12+686.508 RT TO STA. 13+228.564 RT
STA. 13+477.600 TO STA. 13+541.344
STA. 13+838.006 RT TO STA. 13+866.163 RT
STA. 14+381.000 LT TO STA. 14+594.230 LT
STA. 14+380.000 RT TO STA. 14+594.230 RT
STA. 15+055.730 RT TO STA. 15+267.839 RT
STA. 15+100.000 LT TO STA. 15+267.839 LT
STA. 18+451.997 TO STA. 18+500.000

LEGEND

1. EXISTING GRAVEL SHOULDERS
2. EXISTING GUTTER
3. EXISTING GUTTER EXTENSION
3A. EXISTING BIT. SHLD, 200mm W/ 150mm BIT. CURB
4. EXISTING P.C.C. PAVEMENT 228-150-228
5. EXISTING P.C.C. WIDENING, 200mm
6. EXISTING BIT. CONCRETE OVERLAY (VAR. FROM 178 TO 235)
10. PROPOSED BITUMINOUS SURFACE REMOVAL (COLD MILLING) VAR DEPTH (19mm AVG)
11. PROCESSING LIME MODIFIED SOILS, 300mm
12. PROPOSED BITUMINOUS BASE COURSE, SUPERPAVE, 300mm
13. PROPOSED LEVELING BINDER COURSE SUPERPAVE N50, 19/25mm (WIDENING AREAS)
14. PROPOSED BITUMINOUS SURFACE COURSE MIX "C" SUPERPAVE N50, 38mm
15. PROPOSED BITUMINOUS BASE COURSE/WIDENING, SUPERPAVE, 225mm
16. PROPOSED GUTTER REMOVAL (INCLUDES BITUMINOUS OVERLAY AND GUTTER EXTENSION)
17. PROPOSED TYPE 'A' GUTTER (MODIFIED)
18. PROPOSED STRIP REFLECTIVE CRACK CONTROL TREATMENT
19. PROPOSED AGGREGATE SHOULDER TYPE B (57mm TO 25mm)
20. PROPOSED AGGREGATE SHOULDER TYPE B (150mm)
21. PROPOSED PAVEMENT MARKING, LINE 125 mm
22. PROPOSED BITUMINOUS SHOULDER SUPERPAVE, 200mm
23. PROPOSED BITUMINOUS SHOULDERS SUPERPAVE
24. PROPOSED BITUMINOUS CONCRETE BINDER COURSE SUPERPAVE, VAR. DEPTH (WHEN THICKNESS $\geq$ 57mm)

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS (PPP)

SCALE: DRAWN BY
DATE CHECKED BY

c:\projects\md52594\typicals.dgn
1/7/2004 11:36:04 AM kentbd