


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 3
F. A. P. 614	147 (RS-5, B-2)	MORGAN	198	88	12 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-			


92656

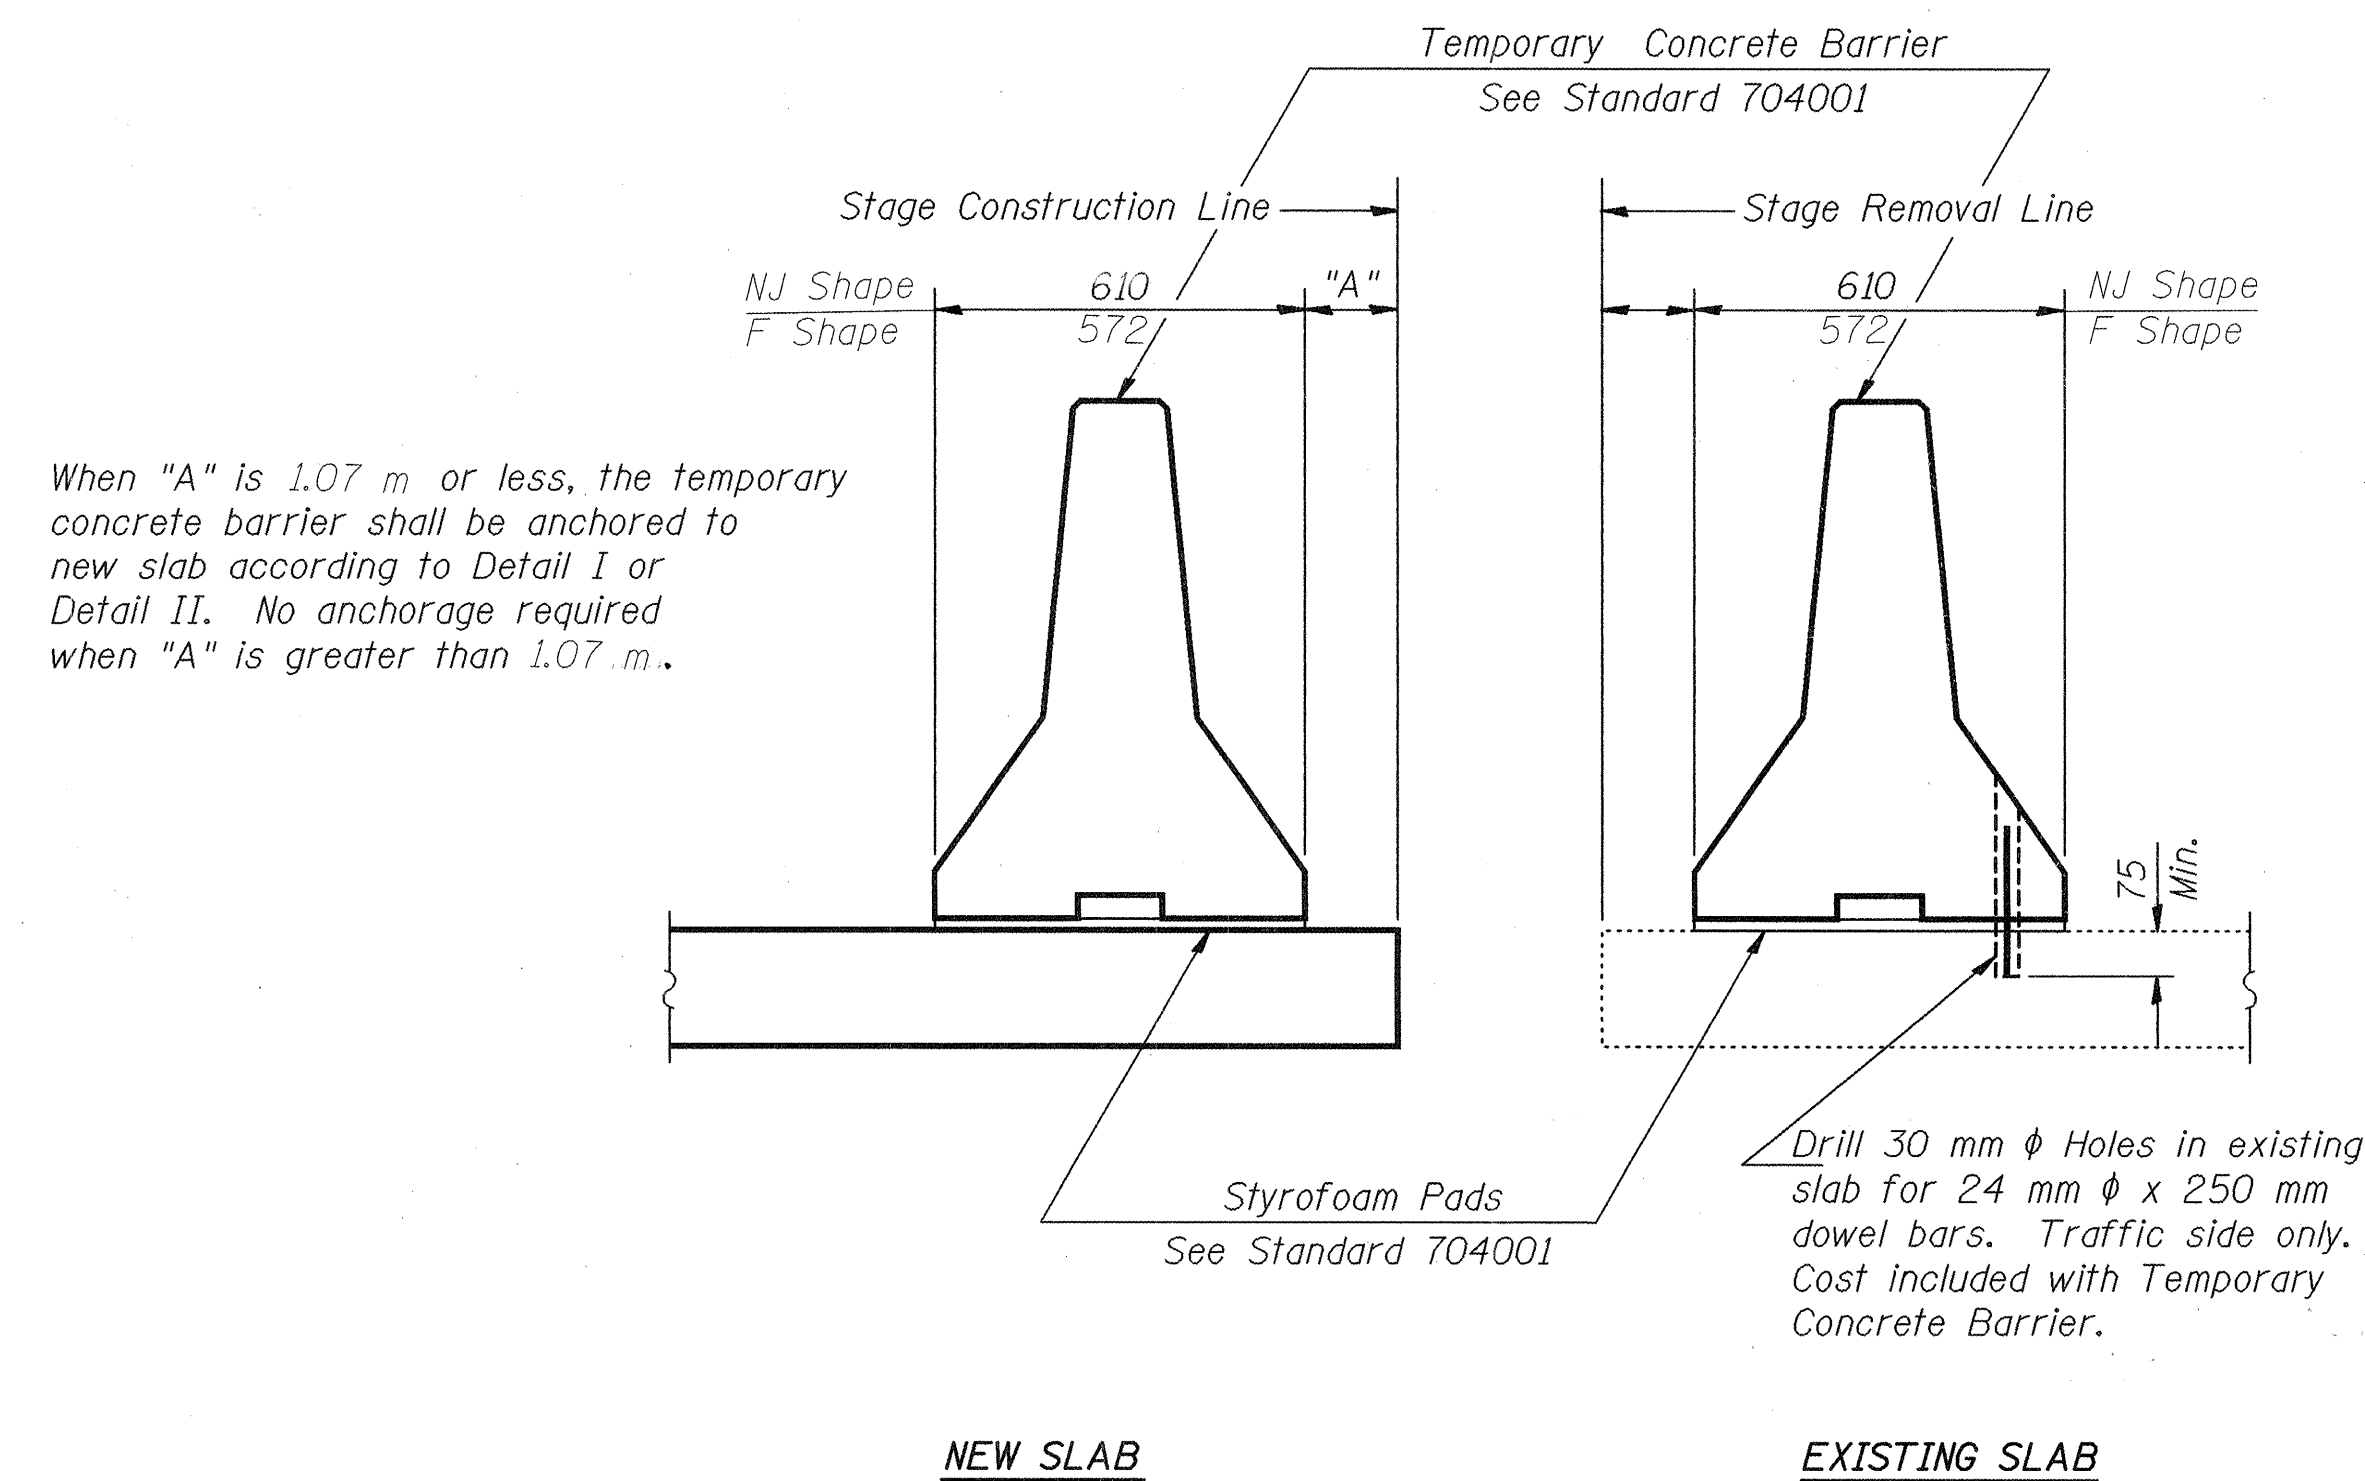

SECTIONS THRU SLAB


NOTES

- Detail I - With Bar Splicer or Couplers:
Connect one (1) 25x180x250 steel \bar{L} to the top layer of couplers with 2-16 mm ϕ bolts screwed to coupler at approximate \bar{C} of each 3 m barrier panel.
- Detail II - With Extended Reinforcement Bars:
Connect one (1) 25x180x250 steel \bar{L} to the concrete slab with 2-16 mm ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate \bar{C} of each 3 m barrier panel.
- Cost of anchorage included with Temporary Concrete Barrier.
- All dimensions are in millimeters (mm) except as noted.

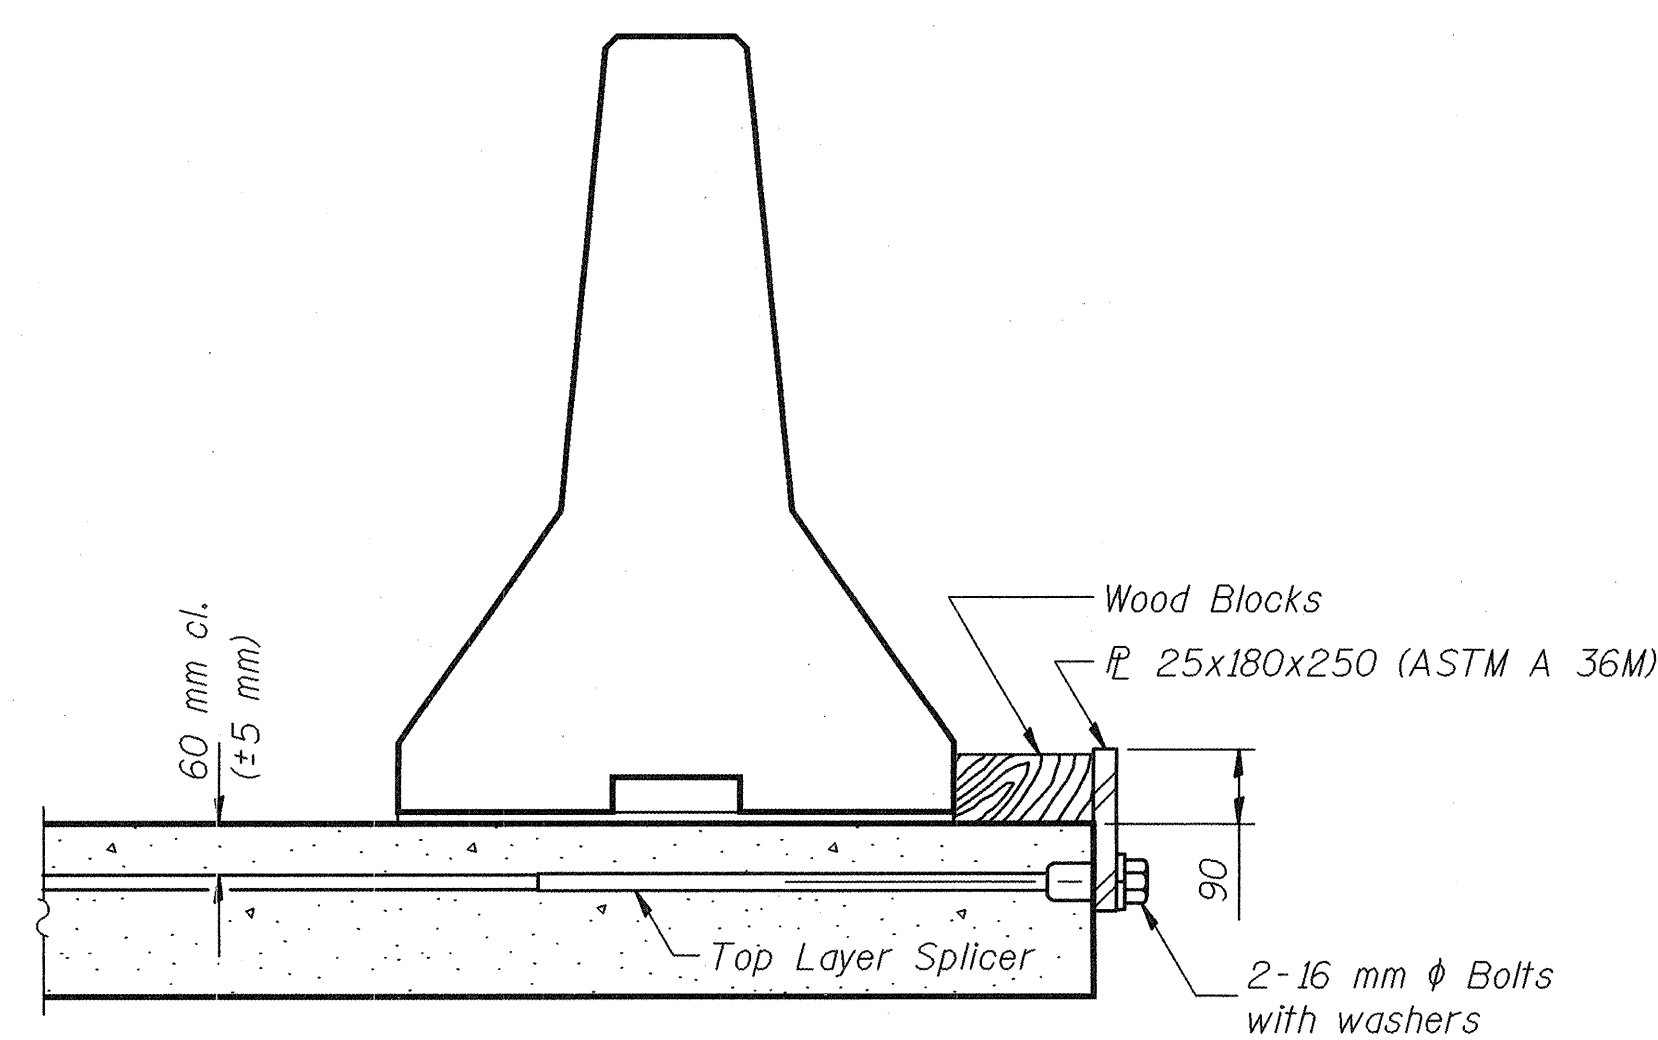


DETAIL I

The 25x180x250 Plate shall not be removed until Stage II Construction forms and reinforcement bars are in place.

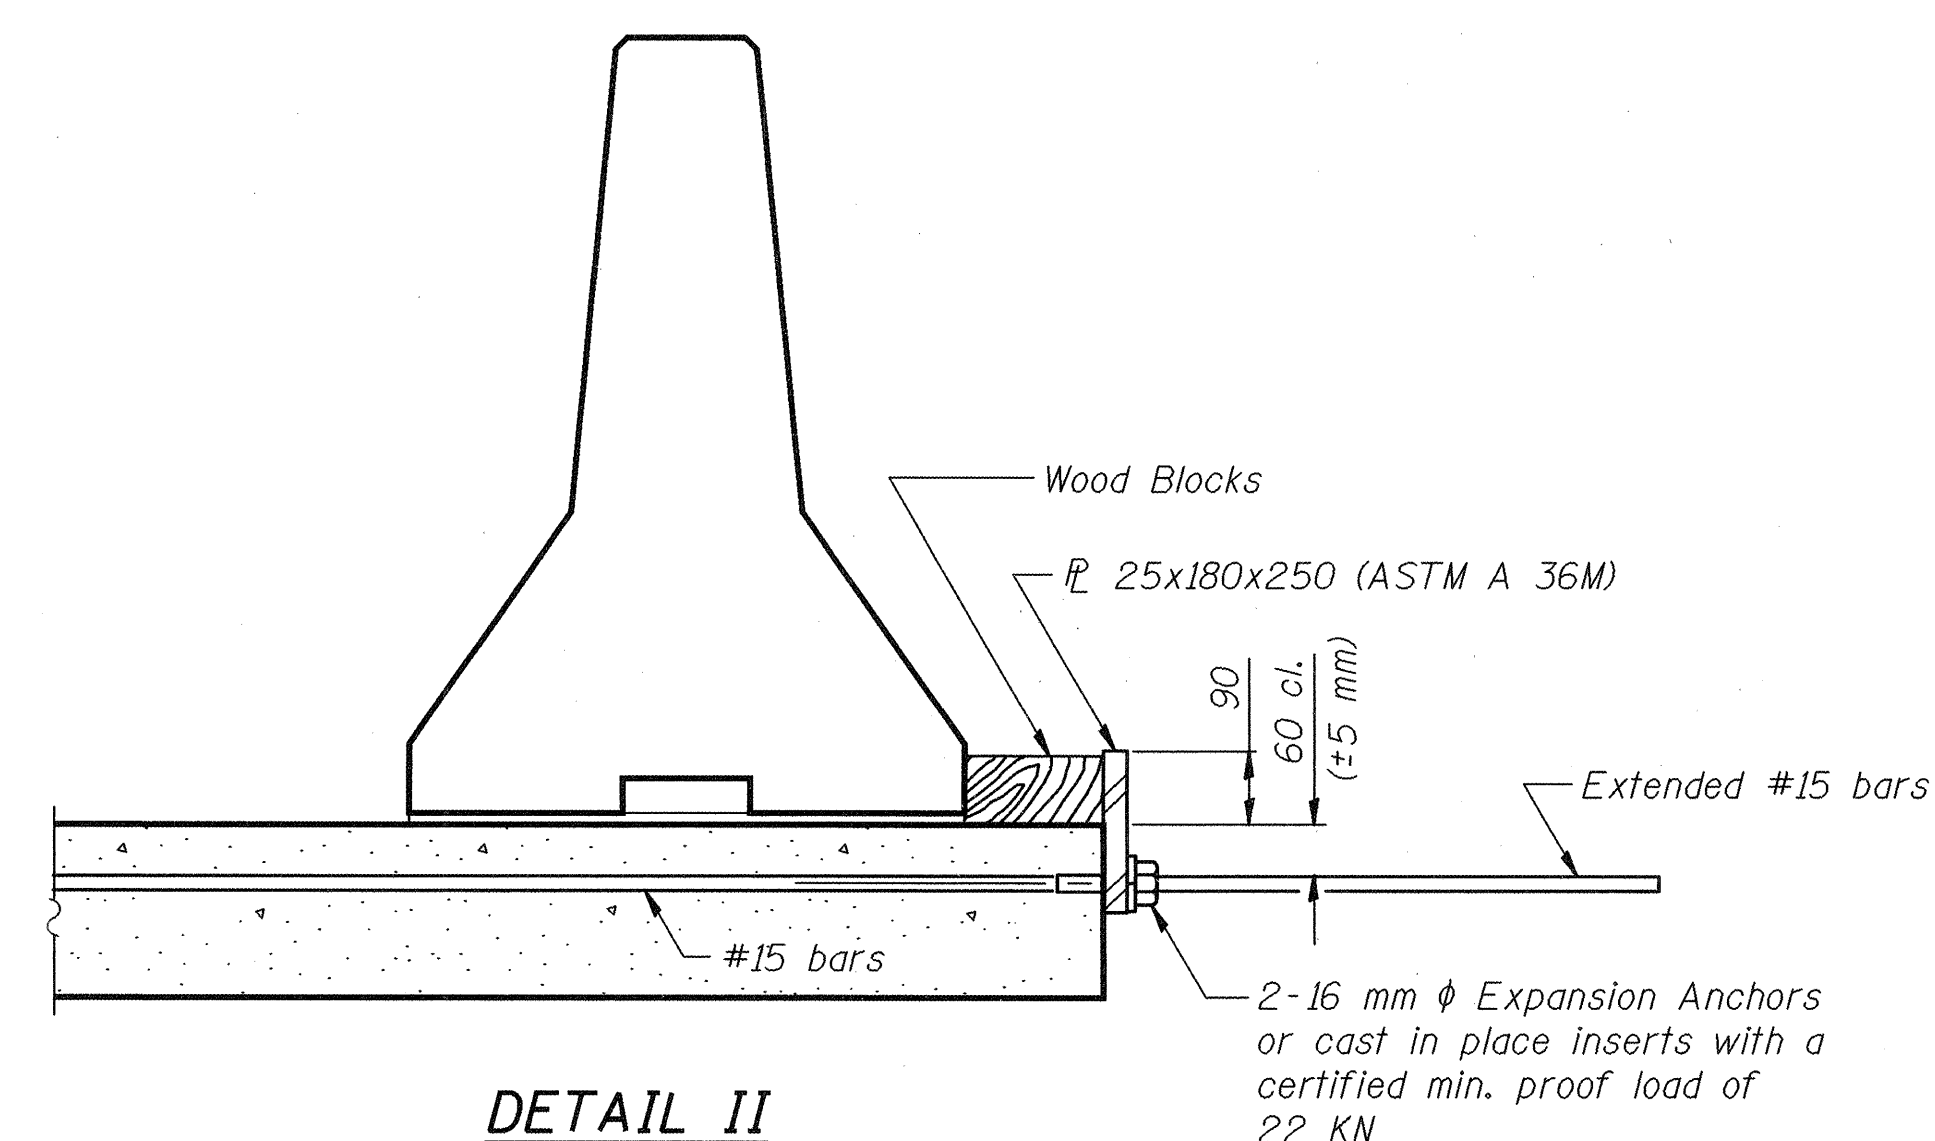

DETAIL II

The 25x180x250 Plate shall not be removed until Stage II Construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

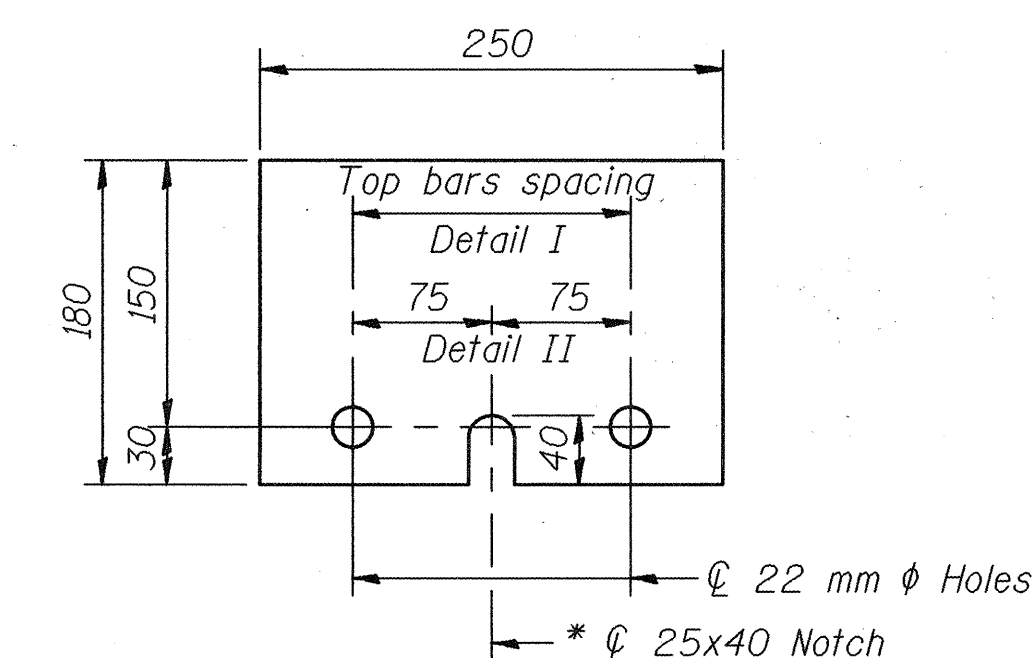

\bar{L} 25x180x250

* Required only with Detail II

TEMPORARY CONCRETE BARRIER
IL RTE 78 OVER FORK OF INDIAN CREEK
F.A.P. RTE 614
SECTION 147 (RS-5, B-2)
MORGAN COUNTY
STATION 14+816.75
S.N. 069-0503

R-27 (M) 4-30-99

DESIGNED	JFJ	FILE NUMBER	136.080
CHECKED	DDB	DATE	Sept.
DRAWN	HLS		2001
CHECKED	DDB		

RANDOLPH & ASSOCIATES, INC.
111 N. PIONEER PARKWAY, PERIA, IL 60130-2124
TEL: 312/391-0844 FAX: 312/391-0855 1-800-831-1021
HTTP://WWW.RANDOLPHINC.COM
CONSULTING ENGINEERS • LAND SURVEYORS