


93363

ROUTE NO.	SEC.	COUNTY	TOTAL SHEETS	SHEET NO.
7967	*	SANGAMON	28	10
FED. ROAD DIST. #7 ILLINOIS PROJECT				

CITY OF SPRINGFIELD * 00-00415-00-WR

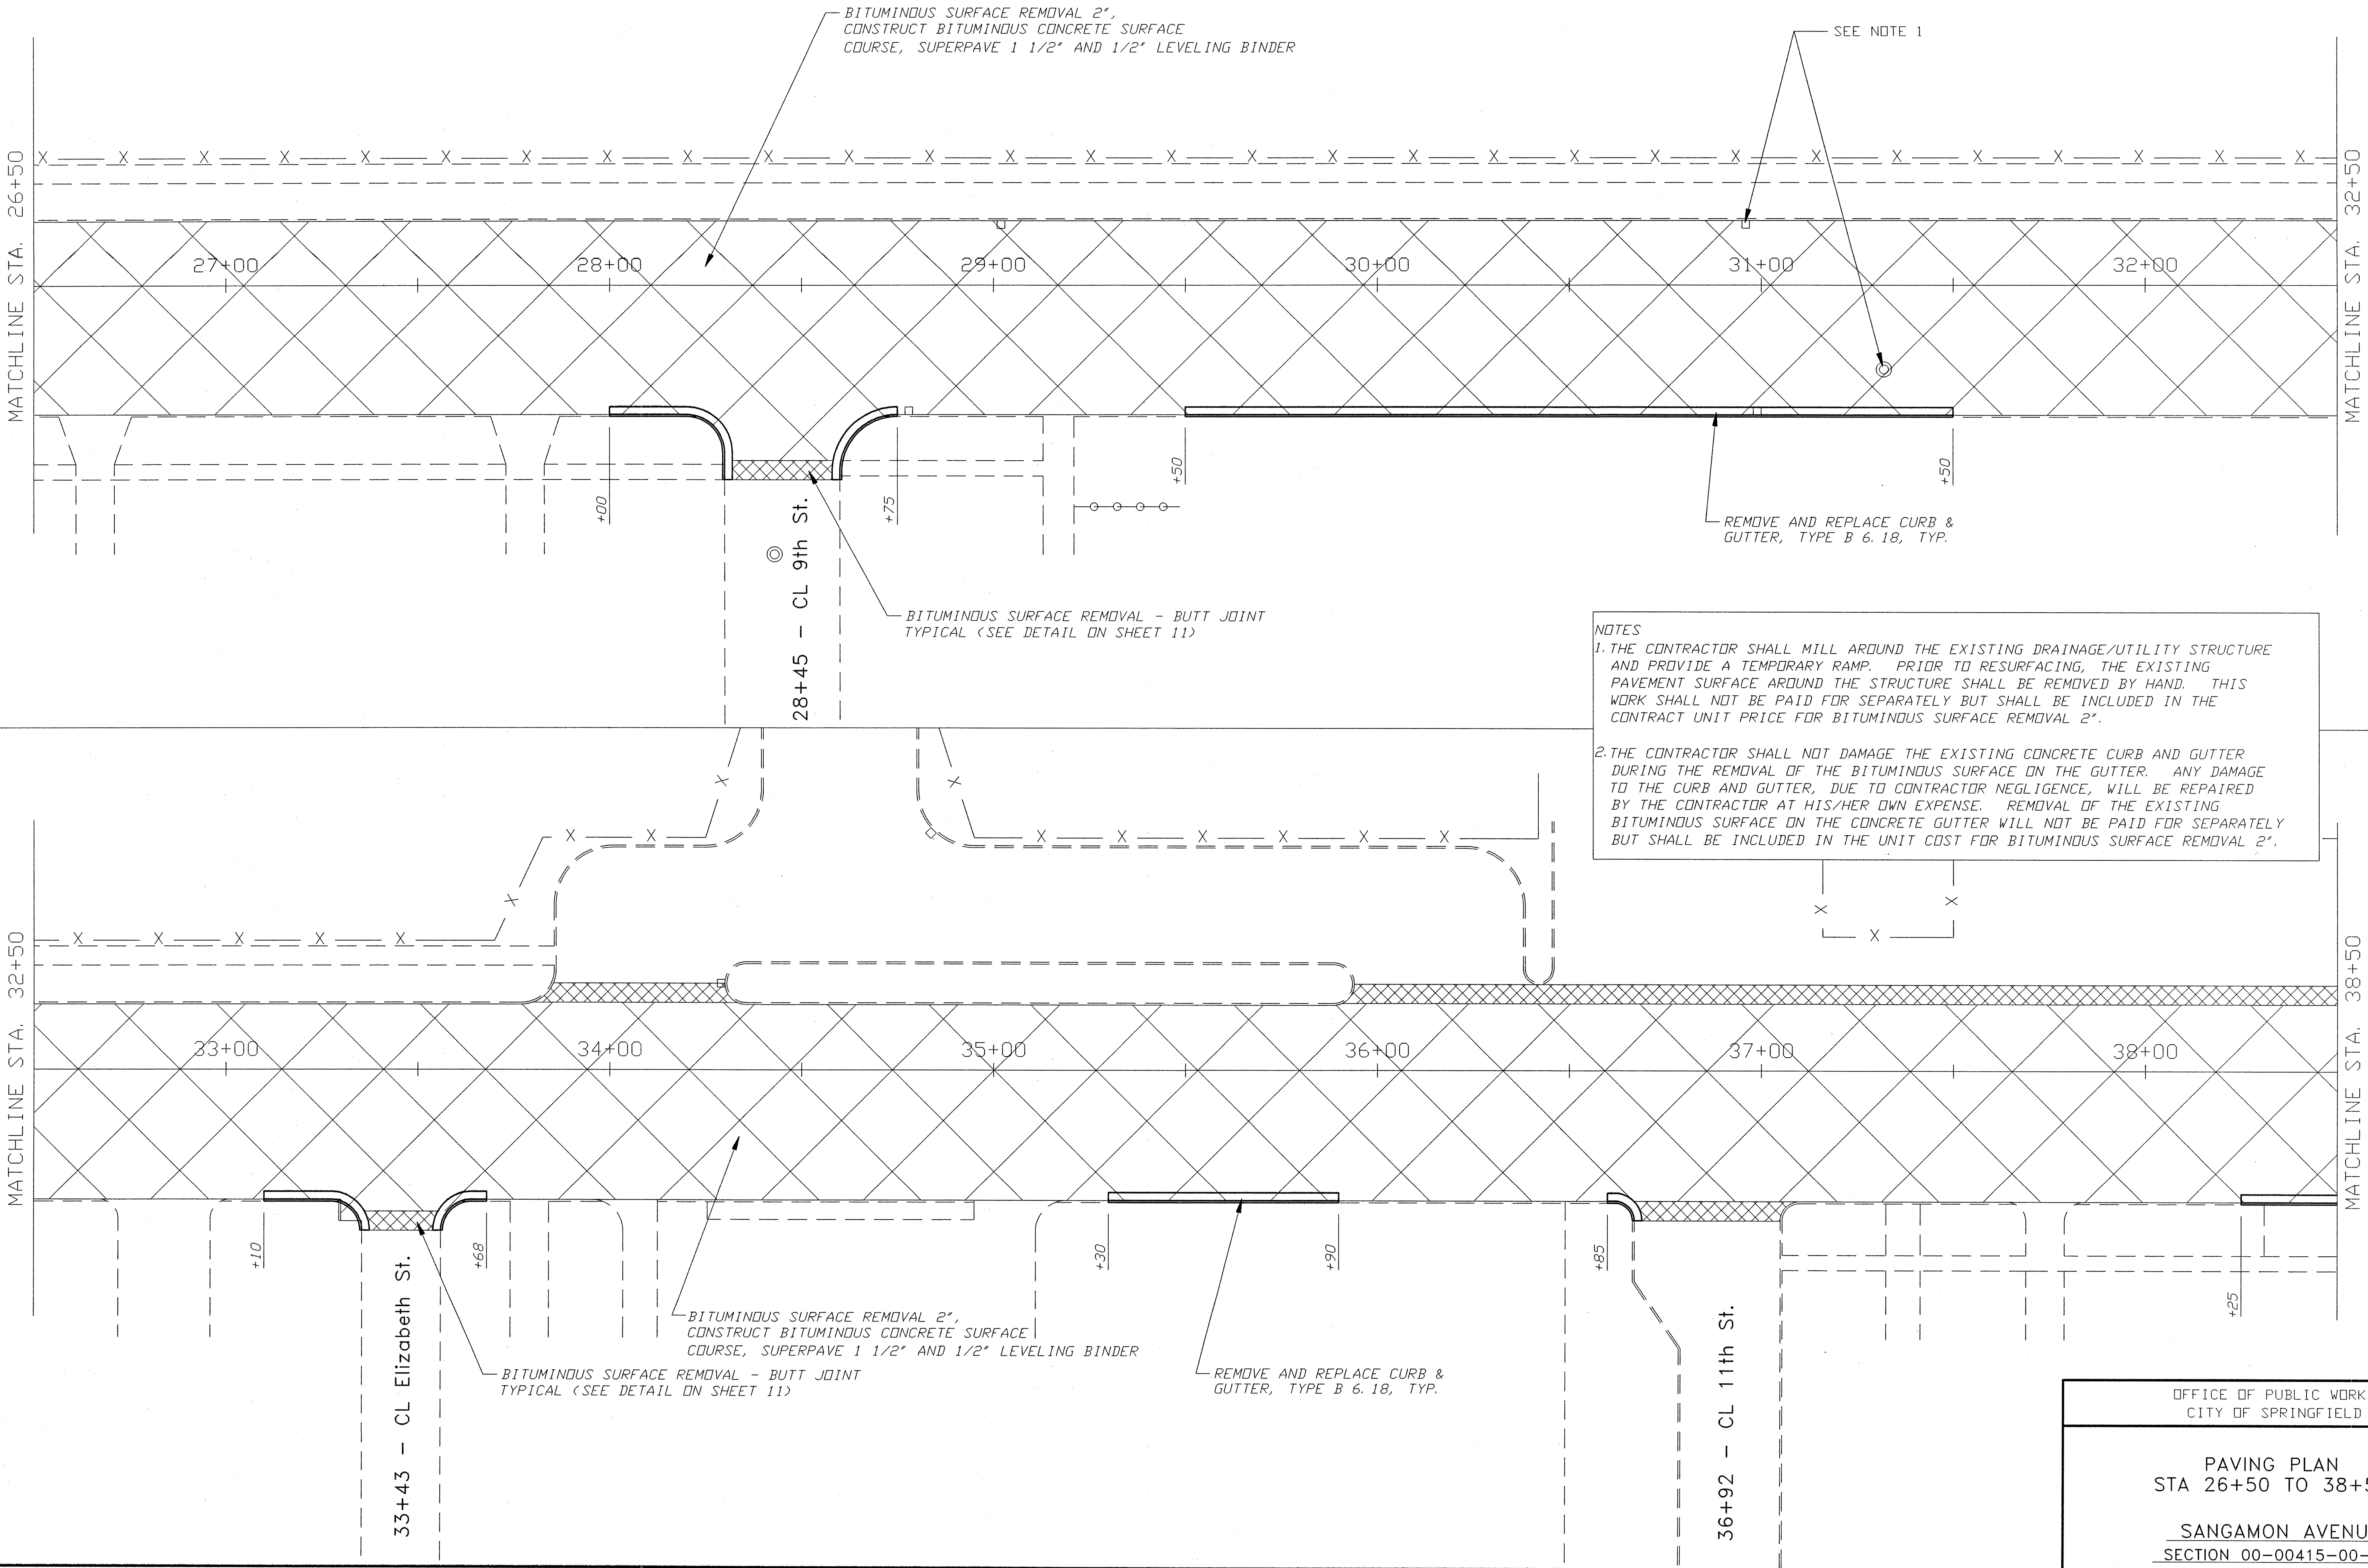

NOTES

1. THE CONTRACTOR SHALL MILL AROUND THE EXISTING DRAINAGE/UTILITY STRUCTURE AND PROVIDE A TEMPORARY RAMP. PRIOR TO RESURFACING, THE EXISTING PAVEMENT SURFACE AROUND THE STRUCTURE SHALL BE REMOVED BY HAND. THIS WORK SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR BITUMINOUS SURFACE REMOVAL 2".

2. THE CONTRACTOR SHALL NOT DAMAGE THE EXISTING CONCRETE CURB AND GUTTER DURING THE REMOVAL OF THE BITUMINOUS SURFACE ON THE GUTTER. ANY DAMAGE TO THE CURB AND GUTTER, DUE TO CONTRACTOR NEGLIGENCE, WILL BE REPAIRED BY THE CONTRACTOR AT HIS/HER OWN EXPENSE. REMOVAL OF THE EXISTING BITUMINOUS SURFACE ON THE CONCRETE GUTTER WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE UNIT COST FOR BITUMINOUS SURFACE REMOVAL 2".

OFFICE OF PUBLIC WORKS
CITY OF SPRINGFIELD

PAVING PLAN
STA 26+50 TO 38+50

SANGAMON AVENUE
SECTION 00-00415-00-WR