


FAS RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
939	*	PULASKI	29	20
STA. TO STA.				
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

• D-9 CONT MAINT FY 04-1


0098814

BUTT JOINT DETAIL

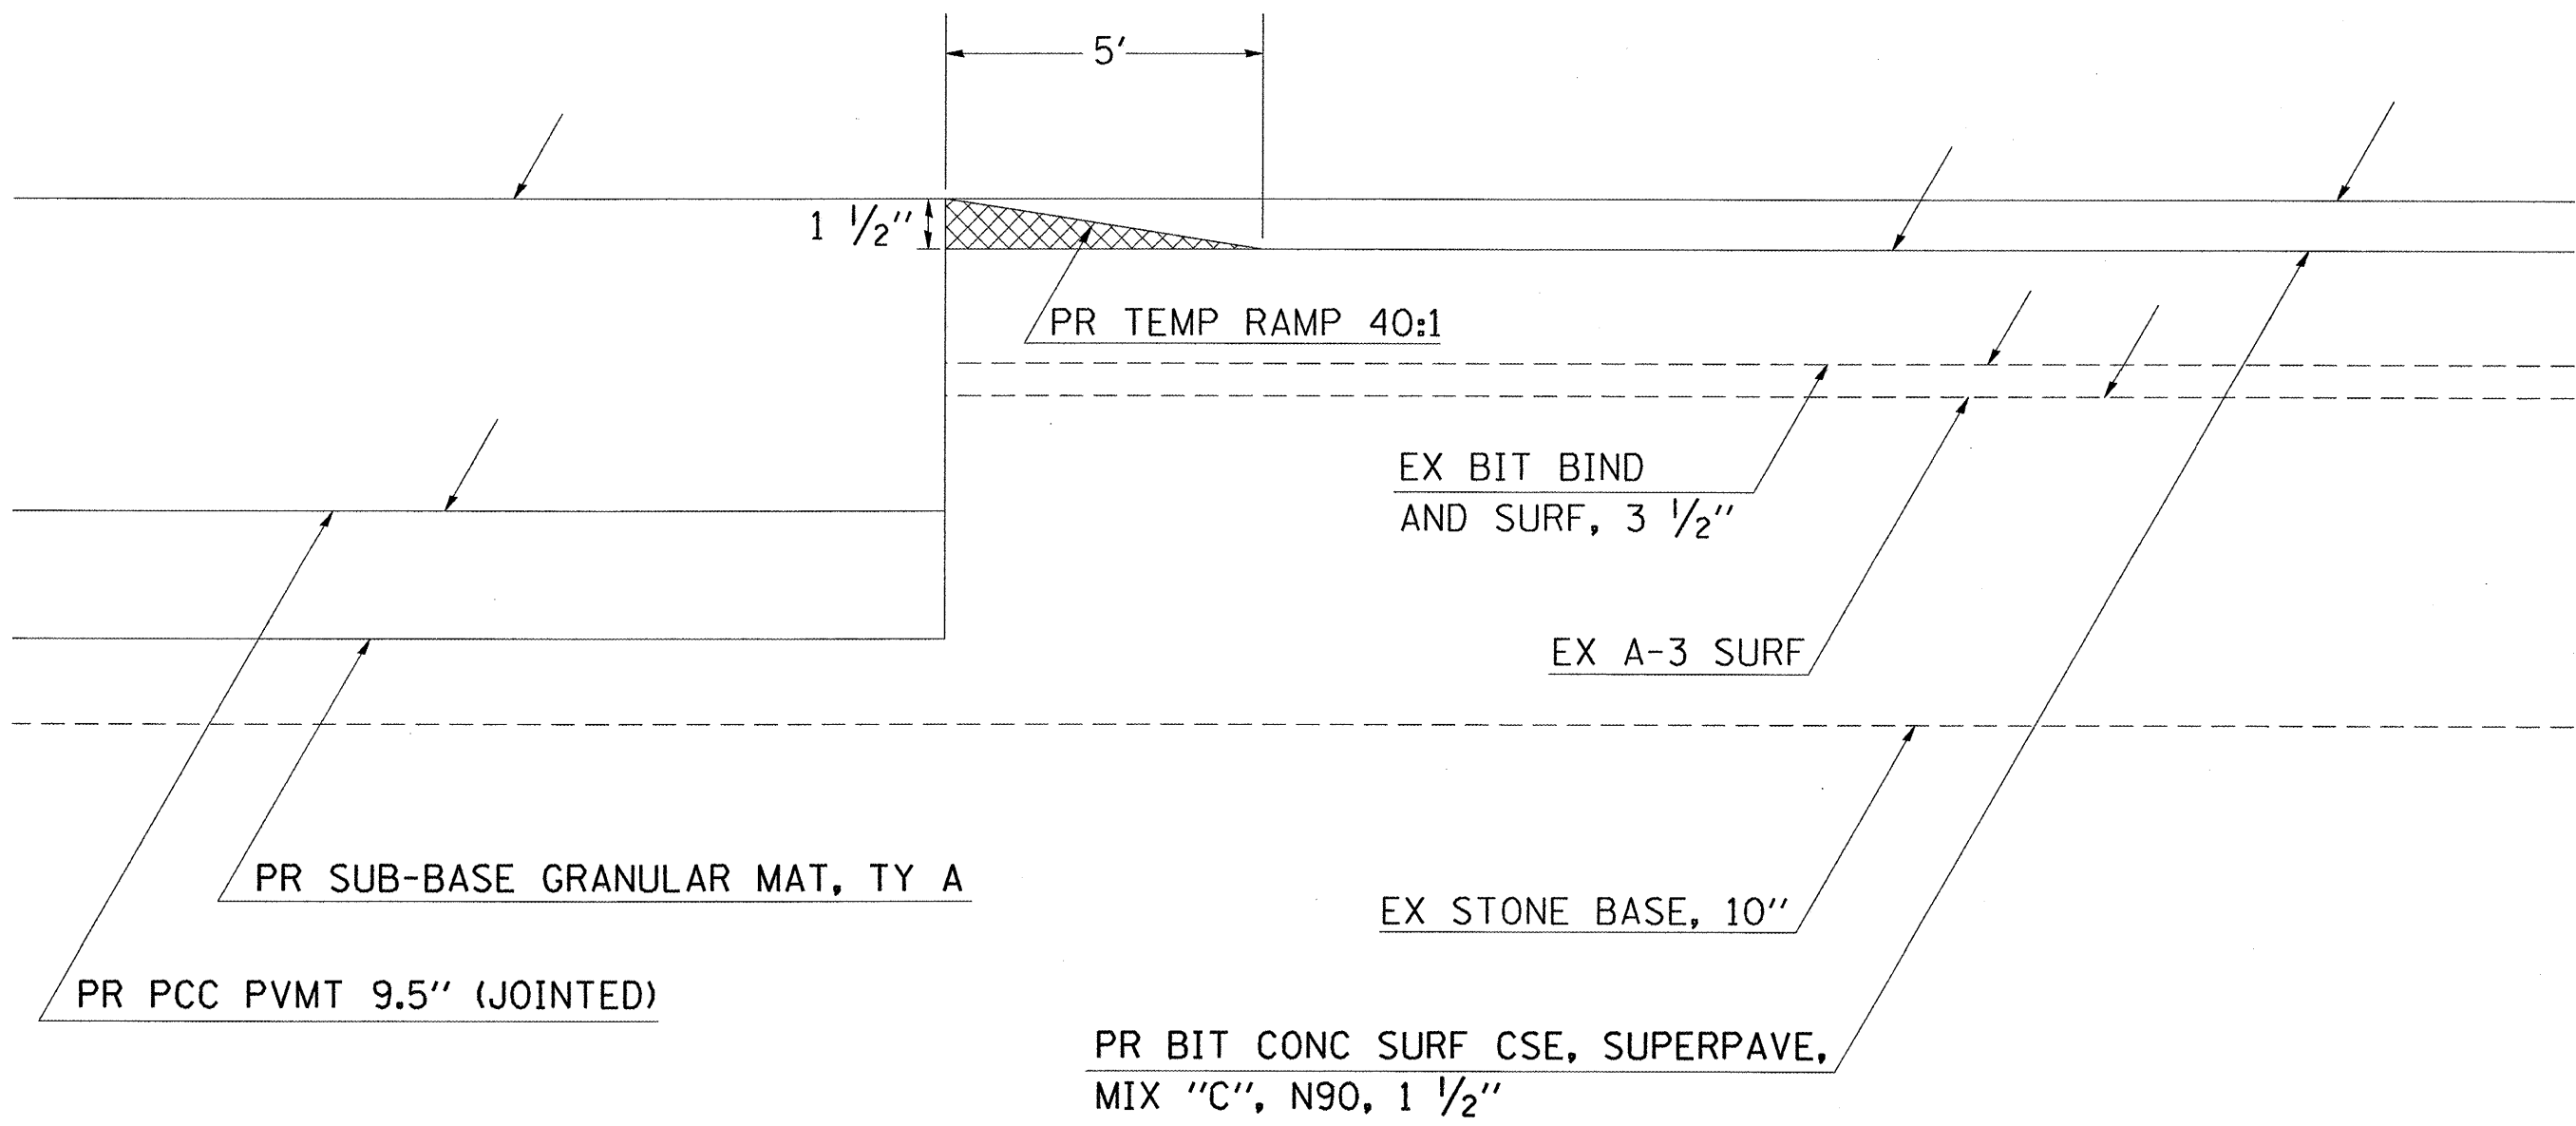


TO BE USED:
STA 65+27 (END OF PAVEMENT REPLACEMENT)

BUTT JOINT DETAIL

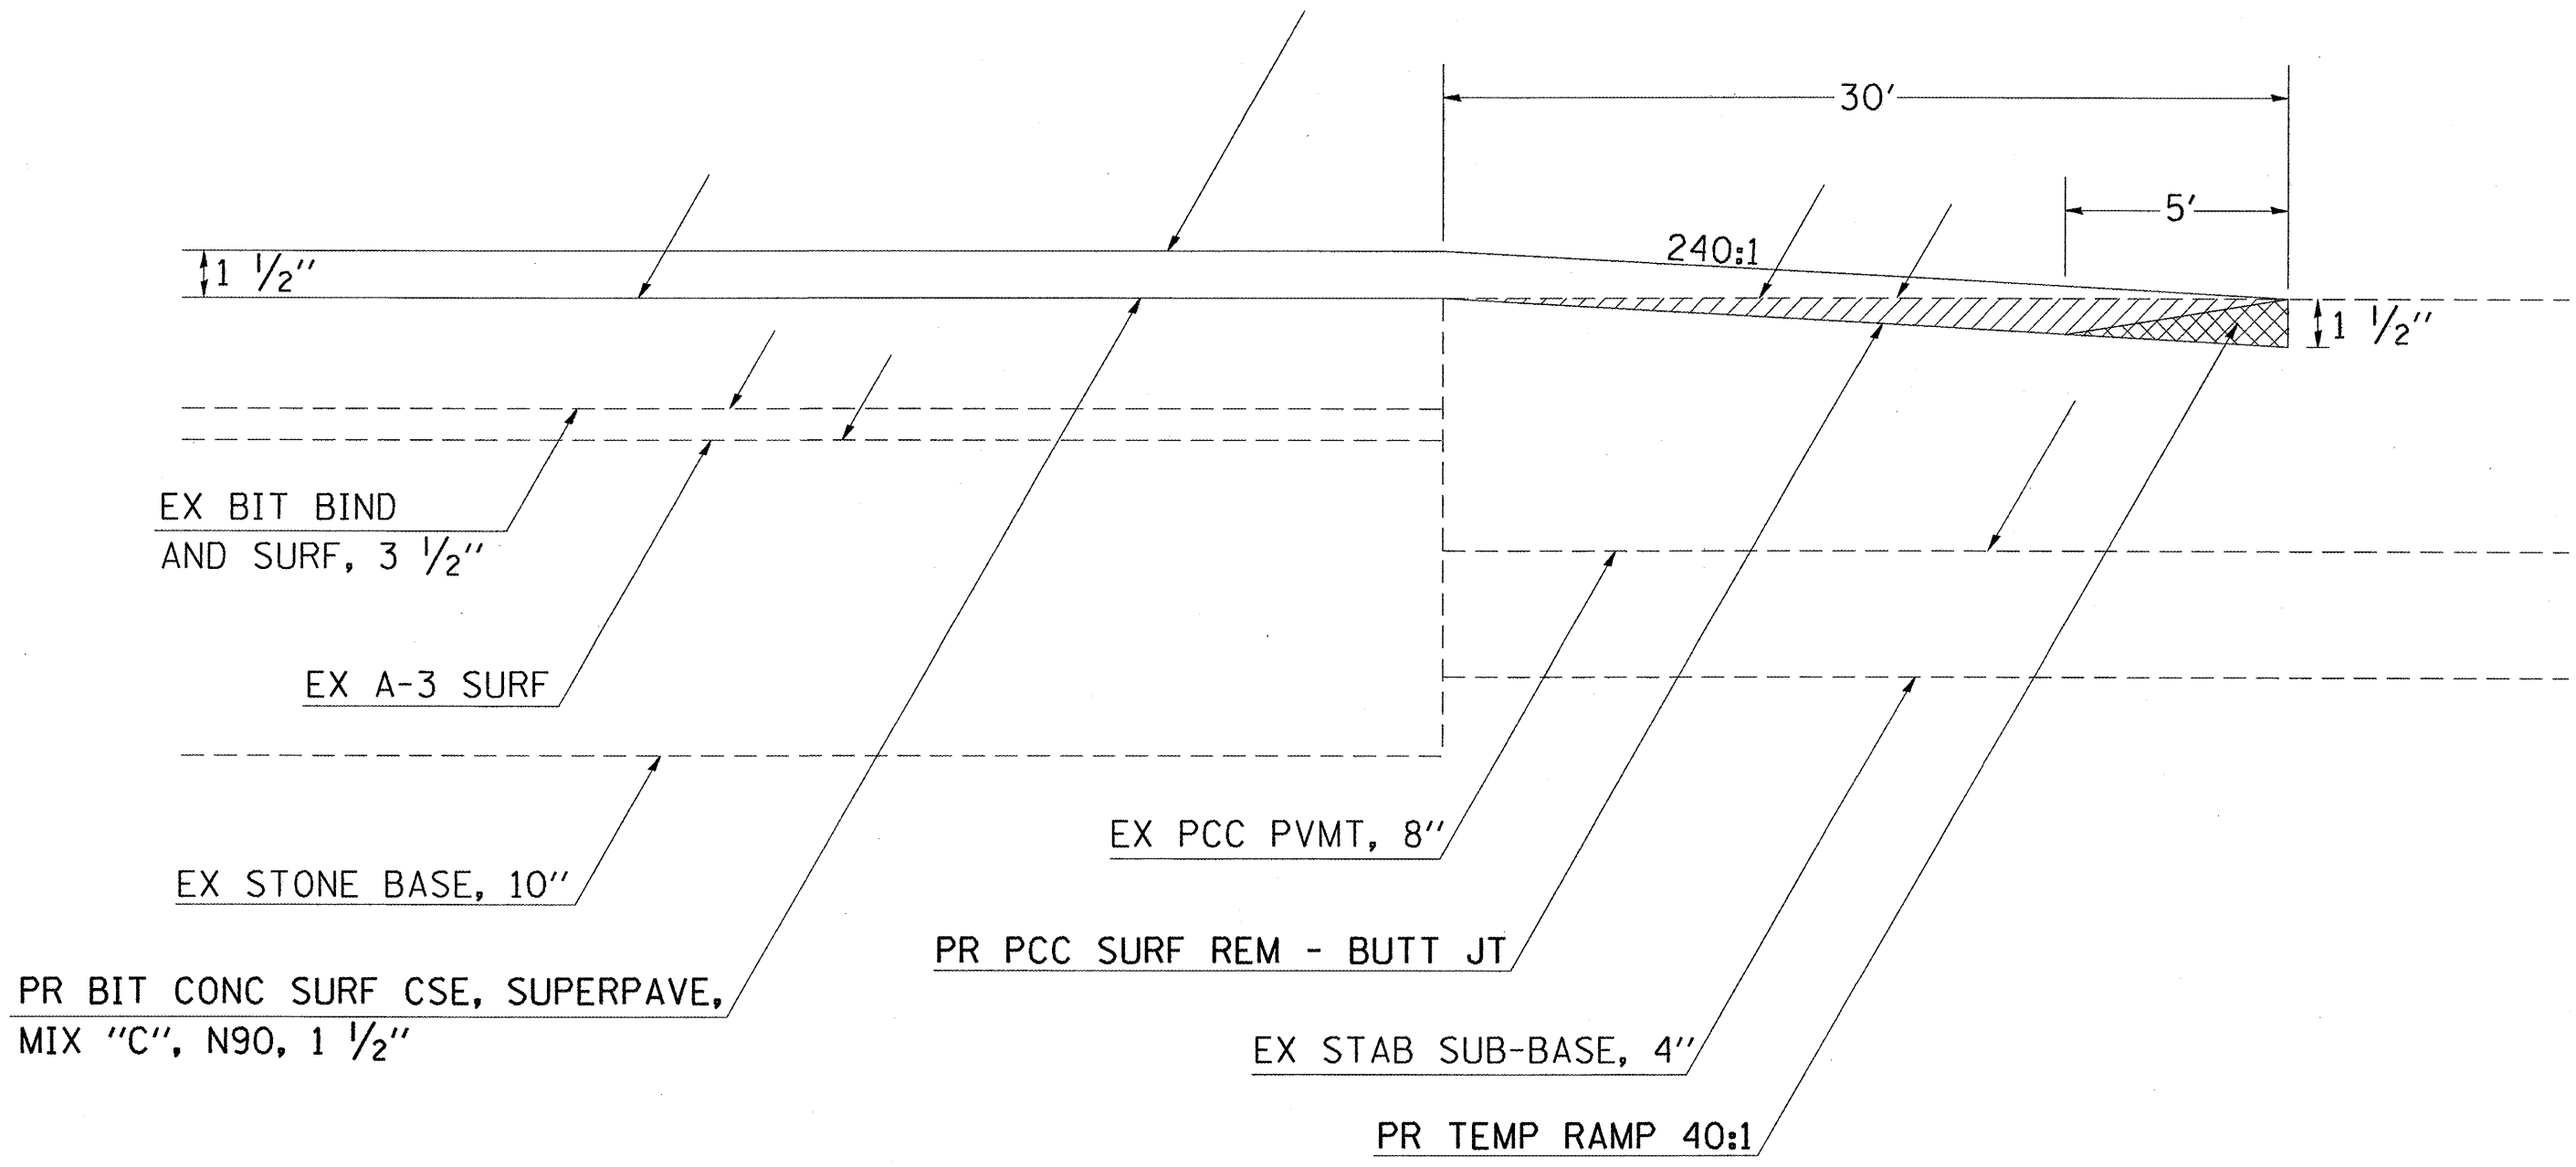


TO BE USED:
STA 92+00 to 92+30
(END OF PROJECT)


TEMPORARY BITUMINOUS CONCRETE TRANSITIONS

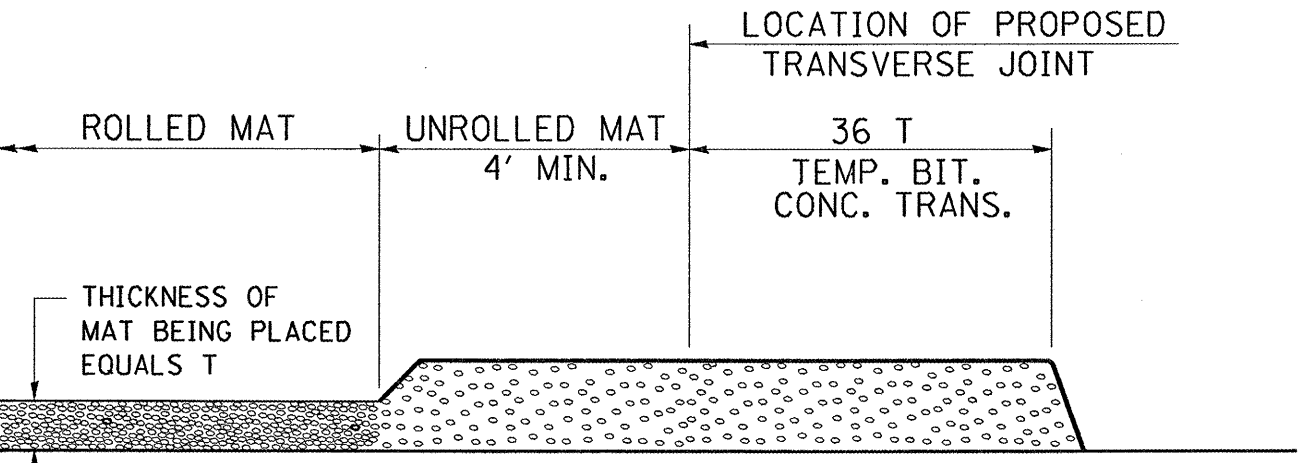


- STEP I**
1. PLACE BITUMINOUS MAT, LENGTH 36 TIMES THE THICKNESS OF THE MAT BEING PLACED PAST THE PROPOSED TRANSVERSE JOINT LOCATION USING NORMAL OPERATING PROCEDURES.
 2. EXTREME CARE SHOULD BE TAKEN TO MAINTAIN ENOUGH MATERIAL IN FRONT OF THE SCREED TO MAINTAIN REQUIRED PAVING DEPTH.

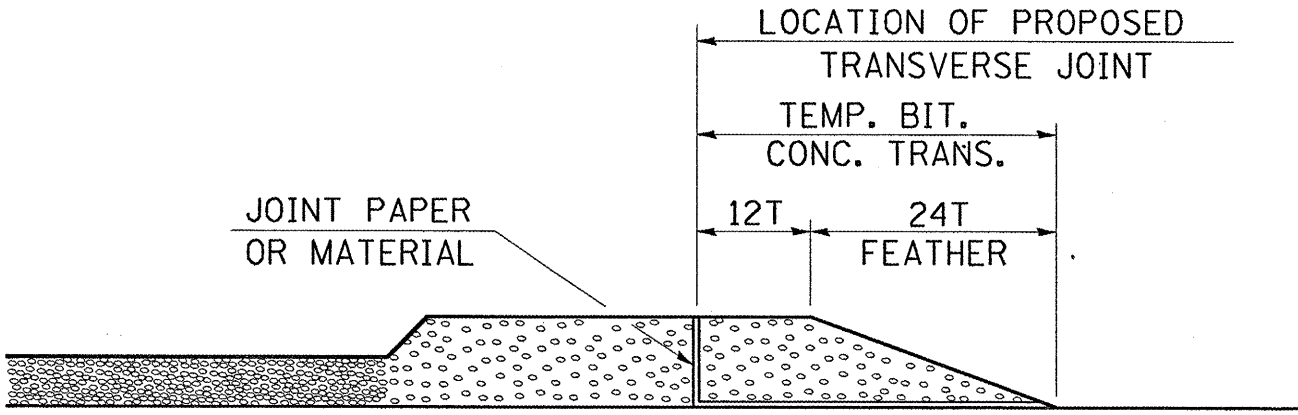

- STEP III**
1. JOINT PAPER OR OTHER PRESELECTED JOINT MATERIAL IS THEN PLACED IN THE CLEARED AREA AND THE EXCESS ASPHALT USED TO HAND FORM A TRANSITION TO THE DIMENSIONS SHOWN ABOVE.
 2. NOTE THAT IN CONSTRUCTING THE TRANSITION, THE MAT DEPTH IS CONTINUED AS PART OF THE TRANSITION BEFORE FORMING THE FEATHER.

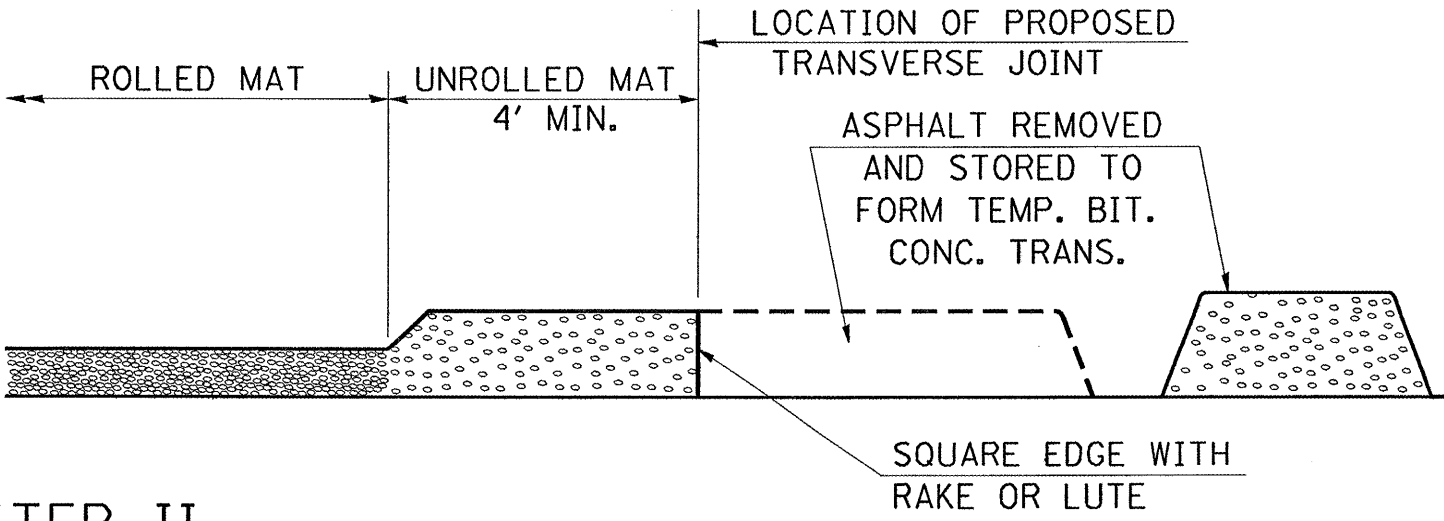

- STEP II**
1. MOVE THE PAVER OUT OF THE WAY AND REMOVE THE ASPHALT FROM THE AREA OF THE PROPOSED TEMPORARY BITUMINOUS CONCRETE TRANSITION.
 2. SQUARE UP THE END OF THE MAT WITH A RAKE OR LUTE.
 3. NOTE THAT THE MAT WITHIN 4' OF THE END OF JOINT IS NOT TO BE ROLLED AT THIS TIME.

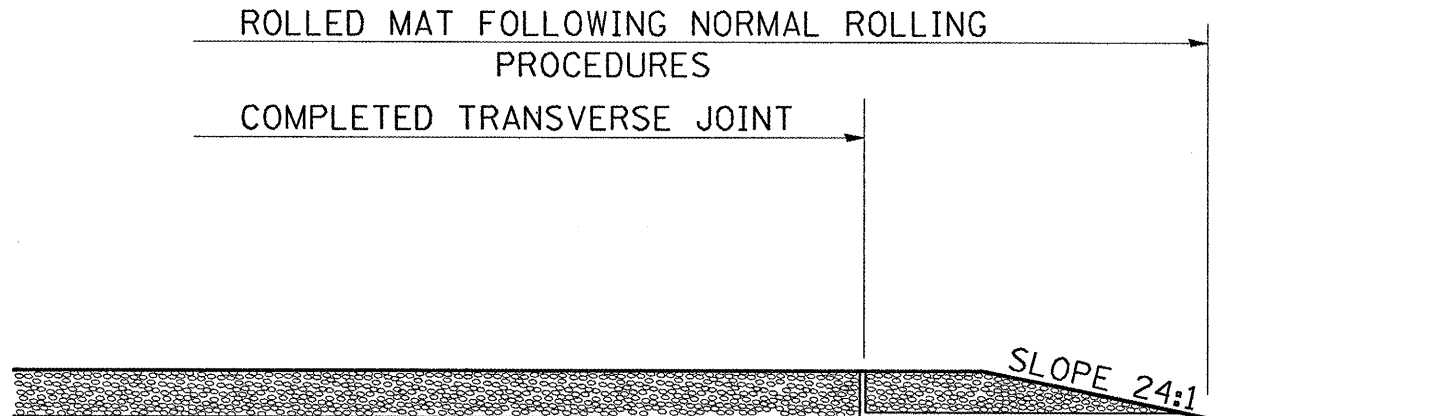

- STEP IV**
1. COMPLETE TEMPORARY TRANSITION BY ROLLING.
 2. TO RESUME PAVING, AT THE JOINT, REMOVE TEMPORARY TRANSITION AND DISPOSE OF THE MATERIAL ACCORDING TO ART. 202.03 OF THE STD. SPECS. (COST INCLUDED IN THE CONTRACT).
 3. CONSTRUCTING THE TEMPORARY TRANSITIONS WILL BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE BITUMINOUS MATERIAL BEING PLACED.

STD. 9-26

DETAILS: BUTT JOINTS, TEMPORARY BITUMINOUS CONCRETE TRANSITIONS