
UNEVEN PAVEMENT SIGN

W8-9a-(0)-48

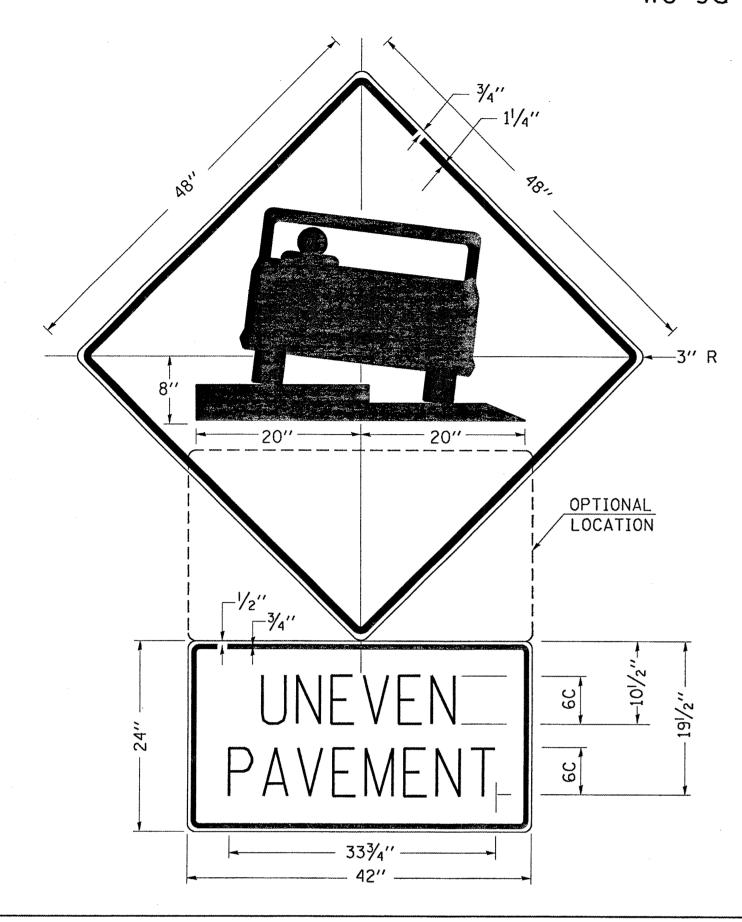

COLORS:

LEGEND AND BORDER - BLACK NON-REFLECTORIZED
BACKGROUND - ORANGE REFLECTORIZED

IOTF:

PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED OR BEFORE RESURFACING OPERATIONS BEGIN, THE CONTRACTOR SHALL HAVE ERECTED "UNEVEN PAVEMENT" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "UNEVEN PAVEMENT" SIGNS UNTIL THE RESURFACING OPERATIONS ARE COMPLETED.

IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE ENGINEER.

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.


DRAWN 2-15
REVISED 4-6
REVISED

TEMPORARY DITCH CHECKS

PLACEMENT OF TEMPORARY STRAW BALE DITCH CHECK IN DRAINAGEWAY

F.A.P. RTE.	SECTION	C	OUNTY	TOTAL SHEETS	SHEET NO.	
322	(12-1)I-N		UNION	46	19	
STA.	STA. TO STA.					
FED. ROA	D DIST. NO.	ILLINOIS	FED. AID	PROJECT		


6698837

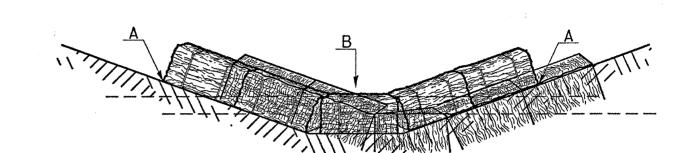

POINTS A SHOULD BE HIGHER THAN POINT B


SPACING BETWEEN TEMPORARY DITCH CHECKS

"B" IS LOW POINT IN CENTER OF CHECK

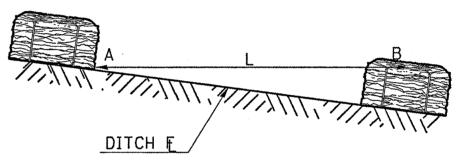

L = THE DISTANCE SUCH THAT POINTS A AND B ARE OF EQUAL ELEVATION REVISIONS
DRAWN 9-01REVISED 10-3REVISED REVISED REVISED

SEEDING & MULCHING

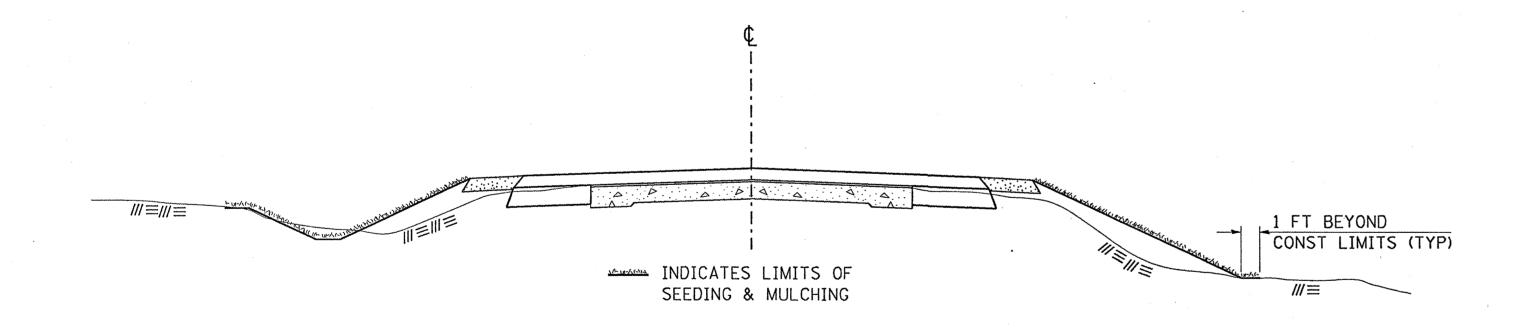

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CON-STRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIME-STONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

REVISIONS
| REDRAWN | 2-15-89 | REVISED | 8-15-94 | REVISED | 6-3-99 | REVISED | REVIS