


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
22	16R	WHITESIDE	201	85
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
CONTRACT 64656				

NEW CONTROLLER
NEW SIGNAL HEAD WITH BACKPLATE
NEW HANDHOLE
NEW GALVANIZED STEEL OR PVC CONDUIT
UPPER NUMERAL INDICATES LENGTH
"T" INDICATES CONDUIT IN TRENCH
"P" INDICATES CONDUIT PUSHED
LOWER NUMERAL INDICATES SIZE AND TYPE
LIGHT POLE, STEEL, 40 FT. M.H. WITH
250 WATT SODIUM VAPOR LUMINAIRE, TENON MOUNTED- TWIN

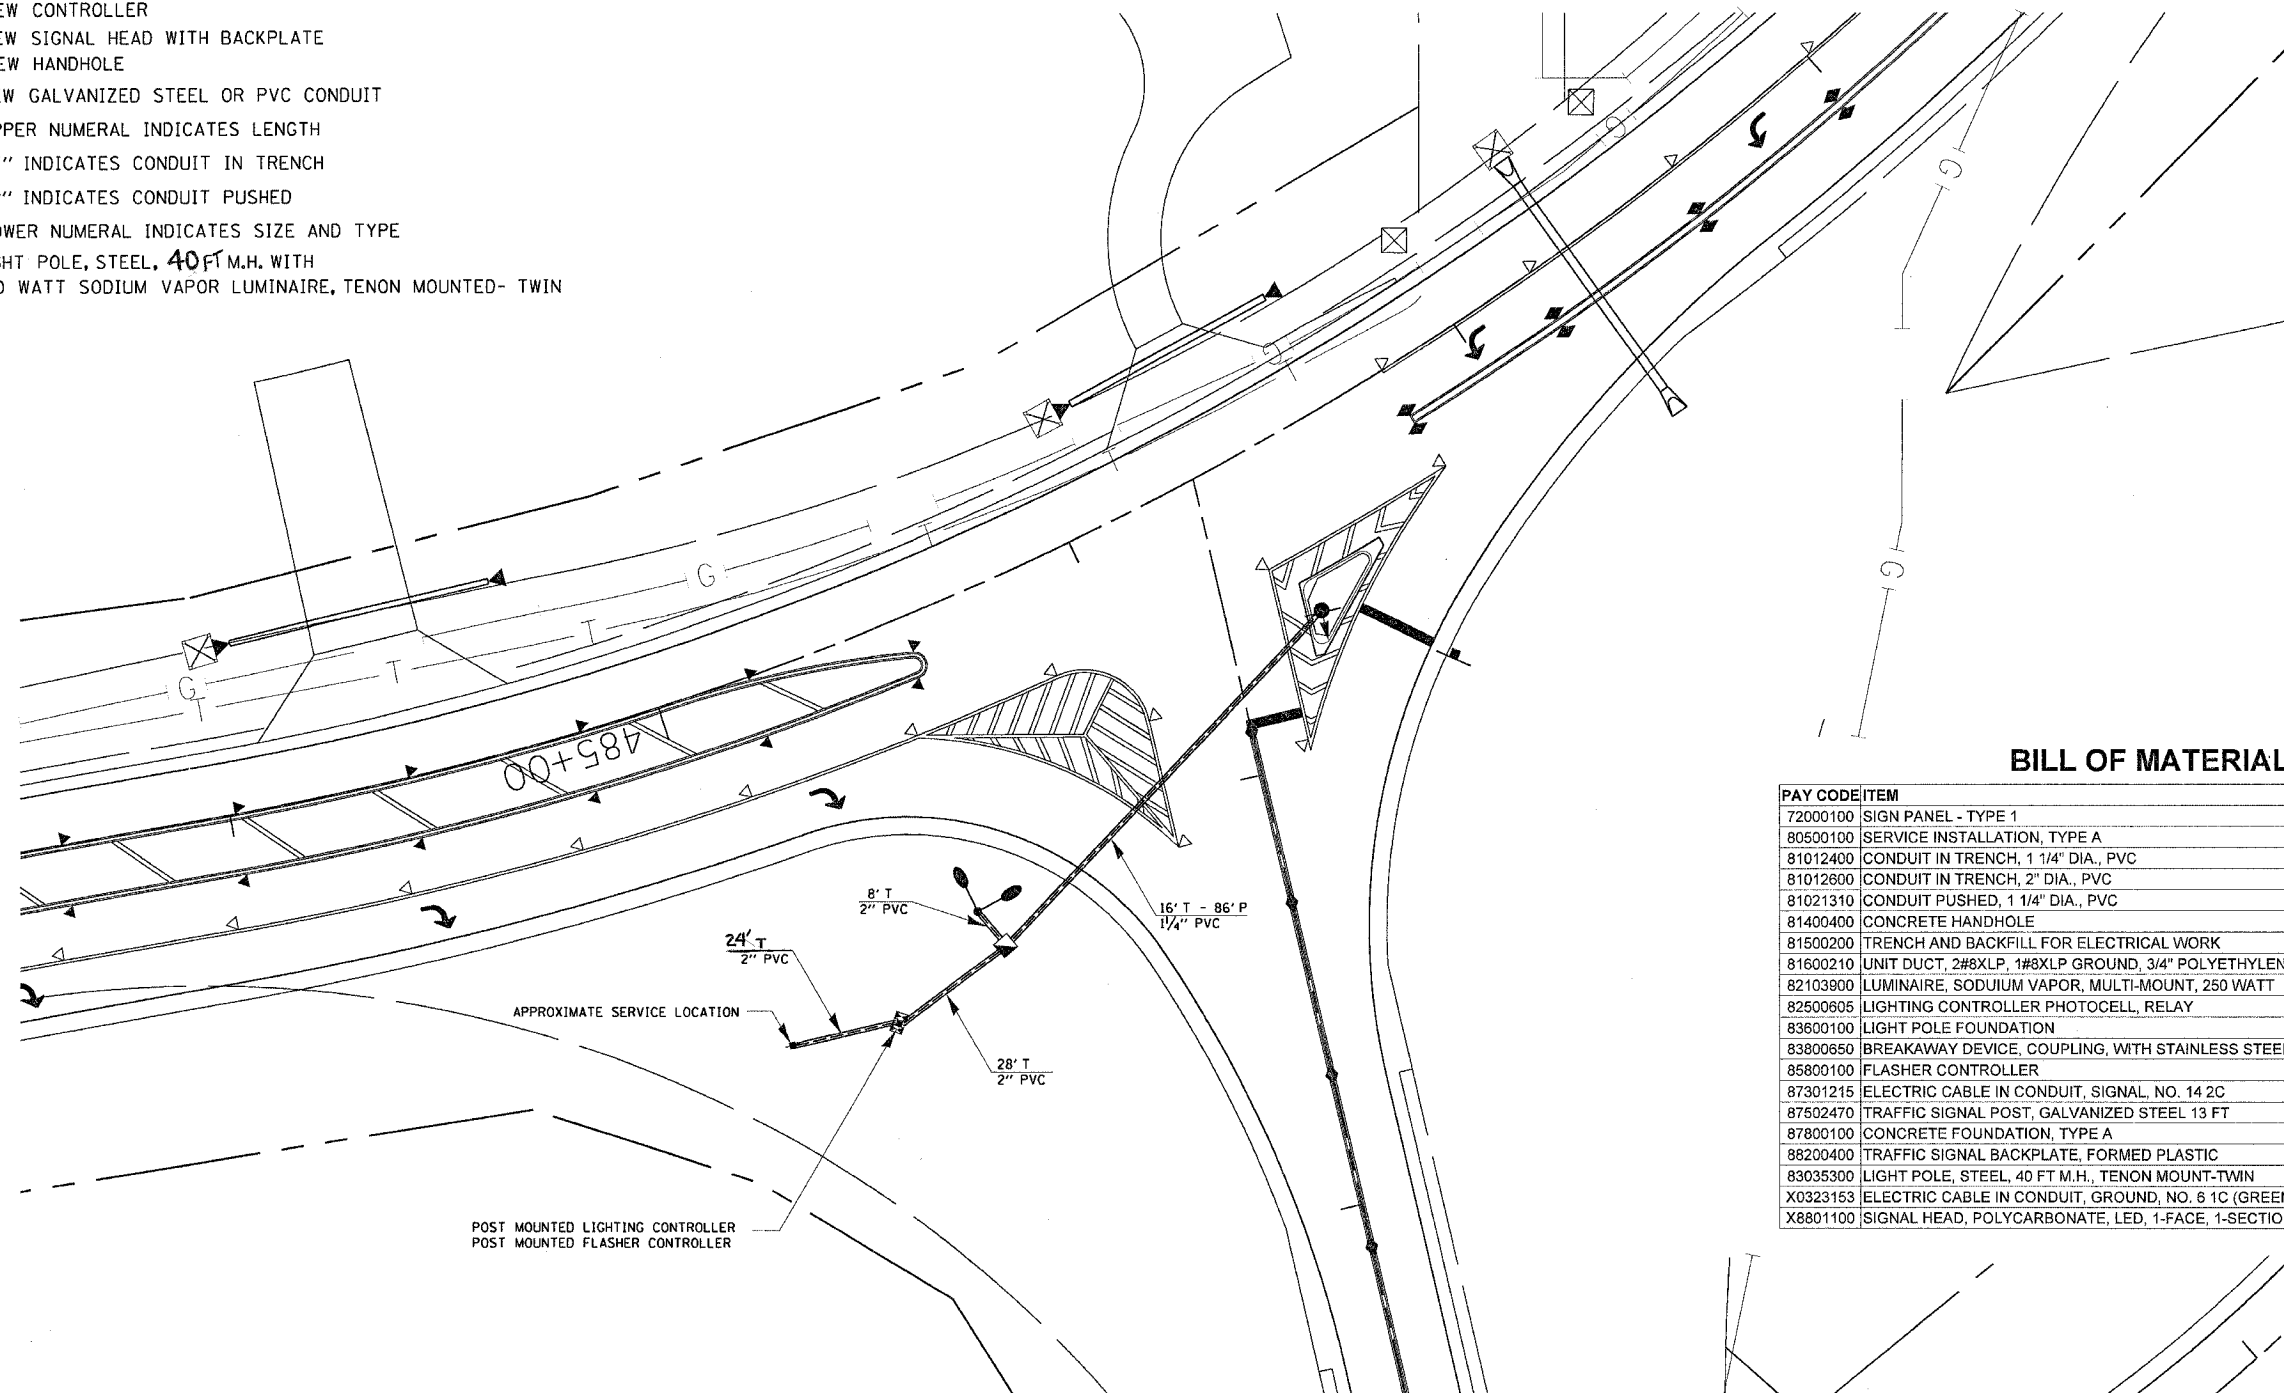

PAY CODE	ITEM	UNIT	TOTAL
72000100	SIGN PANEL - TYPE 1	SQ FT	13.5
80500100	SERVICE INSTALLATION, TYPE A	EACH	1
81012400	CONDUIT IN TRENCH, 1 1/4" DIA., PVC	FOOT	16
81012600	CONDUIT IN TRENCH, 2" DIA., PVC	FOOT	60
81021310	CONDUIT PUSHED, 1 1/4" DIA., PVC	FOOT	86
81400400	CONCRETE HANDHOLE	EACH	1
81500200	TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	76
81600210	UNIT DUCT, 2#8XLP, 1#8XLP GROUND, 3/4" POLYETHYLENE	FOOT	115
82103900	LUMINAIRE, SODIUM VAPOR, MULTI-MOUNT, 250 WATT	EACH	2
82500605	LIGHTING CONTROLLER PHOTOCELL, RELAY	EACH	1
83600100	LIGHT POLE FOUNDATION	EACH	1
83800650	BREAKAWAY DEVICE, COUPLING, WITH STAINLESS STEEL SCREEN	EACH	4
85800100	FLASHER CONTROLLER	EACH	1
87301215	ELECTRIC CABLE IN CONDUIT, SIGNAL, NO. 14 2C	FOOT	163
87502470	TRAFFIC SIGNAL POST, GALVANIZED STEEL 13 FT	EACH	1
87800100	CONCRETE FOUNDATION, TYPE A	FOOT	3
88200400	TRAFFIC SIGNAL BACKPLATE, FORMED PLASTIC	EACH	1
83035300	LIGHT POLE, STEEL, 40 FT M.H., TENON MOUNT-TWIN	EACH	1
X0323153	ELECTRIC CABLE IN CONDUIT, GROUND, NO. 6 1C (GREEN)	FOOT	56
X8801100	SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 1-SECTION, POST MOUNTED	EACH	1

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME	DATE	
SCALE: VERT.		DRAWN BY
DATE: HORIZ.		
		CHECKED BY

ID LIGHTING AND FLASHING BEACON PLANS

```
FILE NAME = c:\projects\p206937\o206937.dgn
LEVELS = 1-63
PLOT SCALE = #02PLOTSCALE!
PLOT DATE = Mon Apr 12 11:11:19 2004
OPERATOR = DUNCAN - PROGRAM DEVELOPMENT/PLANS
```