

TREE REPLACEMENT SCHEDULE

CODE #	SCIENTIFIC NAME	COMMON NAME	SIZE	UNIT	QUANTITY
A2001416	TREE, ACER SACCHARINUM AUTUMN BLAZE	AUTUMN BLAZE SILVER MAPLE	2" CALIPER, BALLED & BURLAPPED	EACH	8
A2006514	TREE, QUERCUS BICOLOR	SWAMP WHITE OAK	1 3/4" CALIPER, BALLED & BURLAPPED	EACH	8
B2002716	TREE, MALUS ADIRONDACK	ADIRONDACK CRABAPPLE	2" CALIPER, TREE FORM, BALLED & BURLAPPED	EACH	8
B2004114	TREE, MALUS PRAIRIFIRE	PRAIRIFIRE CRABAPPLE	1 3/4" CALIPER, TREE FORM, BALLED & BURLAPPED	EACH	8
D2001772	EVERGREEN, PICEA ABIES	NORWAY SPRUCE	6' HEIGHT, BALLED & BURLAPPED	EACH	30
TOTAL					62

LAYOUT SHALL BE PERFORMED BY THE DISTRICT LANDSCAPE ARCHITECT


MULCH SHALL BE HARDWOOD CHIPS, 5 FOOT WIDTH, 4 INCHES THICK WITH WEED BARRIER

THE 30 NORWAY SPRUCES ARE TO BE PLANTED AT THE LYNDON MAINTENANCE YARD LOCATED 1 MILE WEST OF LYNDON ON IL 78 / MOLINE RD.

90.4

RUMBLE RESURFACING


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
22	16R	WHITESIDE	201	100
STA. TO STA.				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				
CONTRACT NO. 64656				

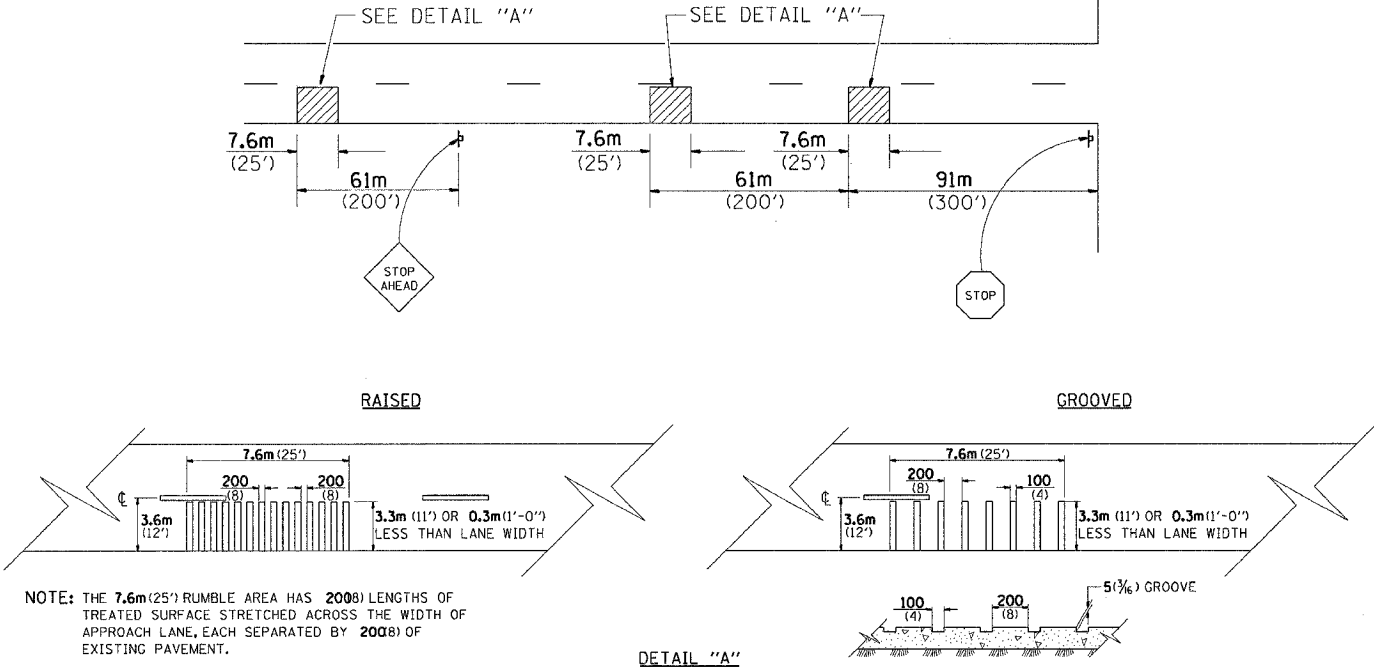

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

91.4

TYPICAL MARKING FOR PAINTED ISLANDS

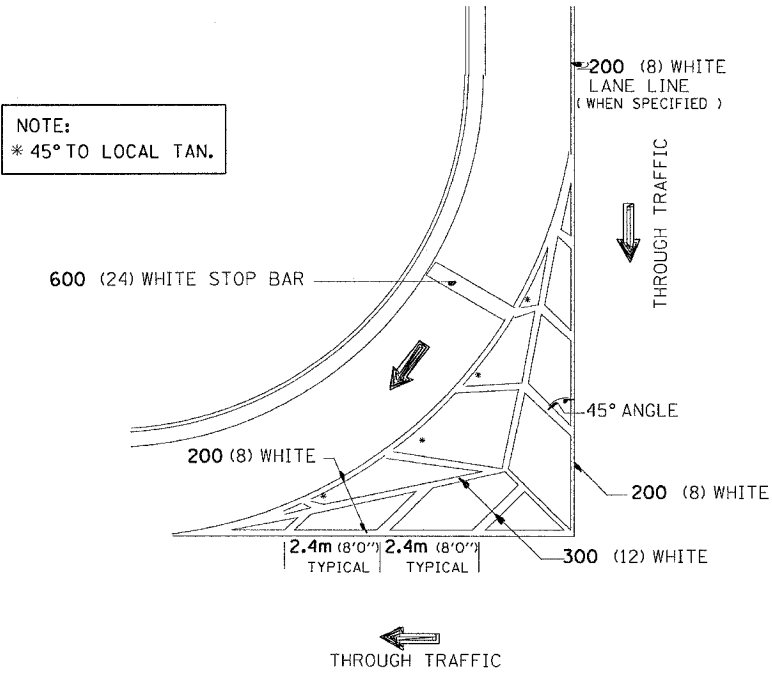


ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

TYPICAL MARKING FOR PAINTED ISLANDS

93.4

DRAIN FOR AGGREGATE BASE COURSE

NOTE: ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

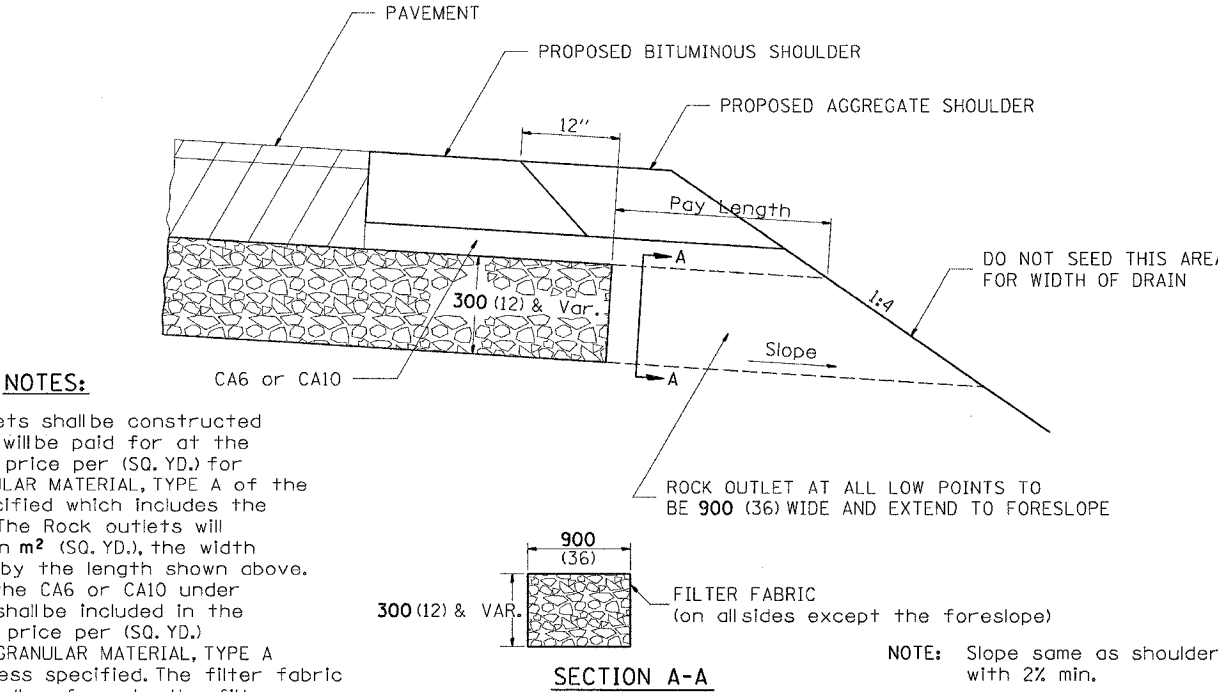

NOTES:
The rock outlets shall be constructed using CA7 and will be paid for at the contract unit price per (SQ. YD.) for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified which includes the filter fabric. The Rock outlets will be measured in m² (SQ. YD.), the width being 900 (36) by the length shown above. The cost of the CA6 or CA10 under the shoulder shall be included in the contract unit price per (SQ. YD.) for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified. The filter fabric to be used shall conform to the filter fabric used for Riprap.

NOTE: Slope same as shoulder with 2% min.

96.4