
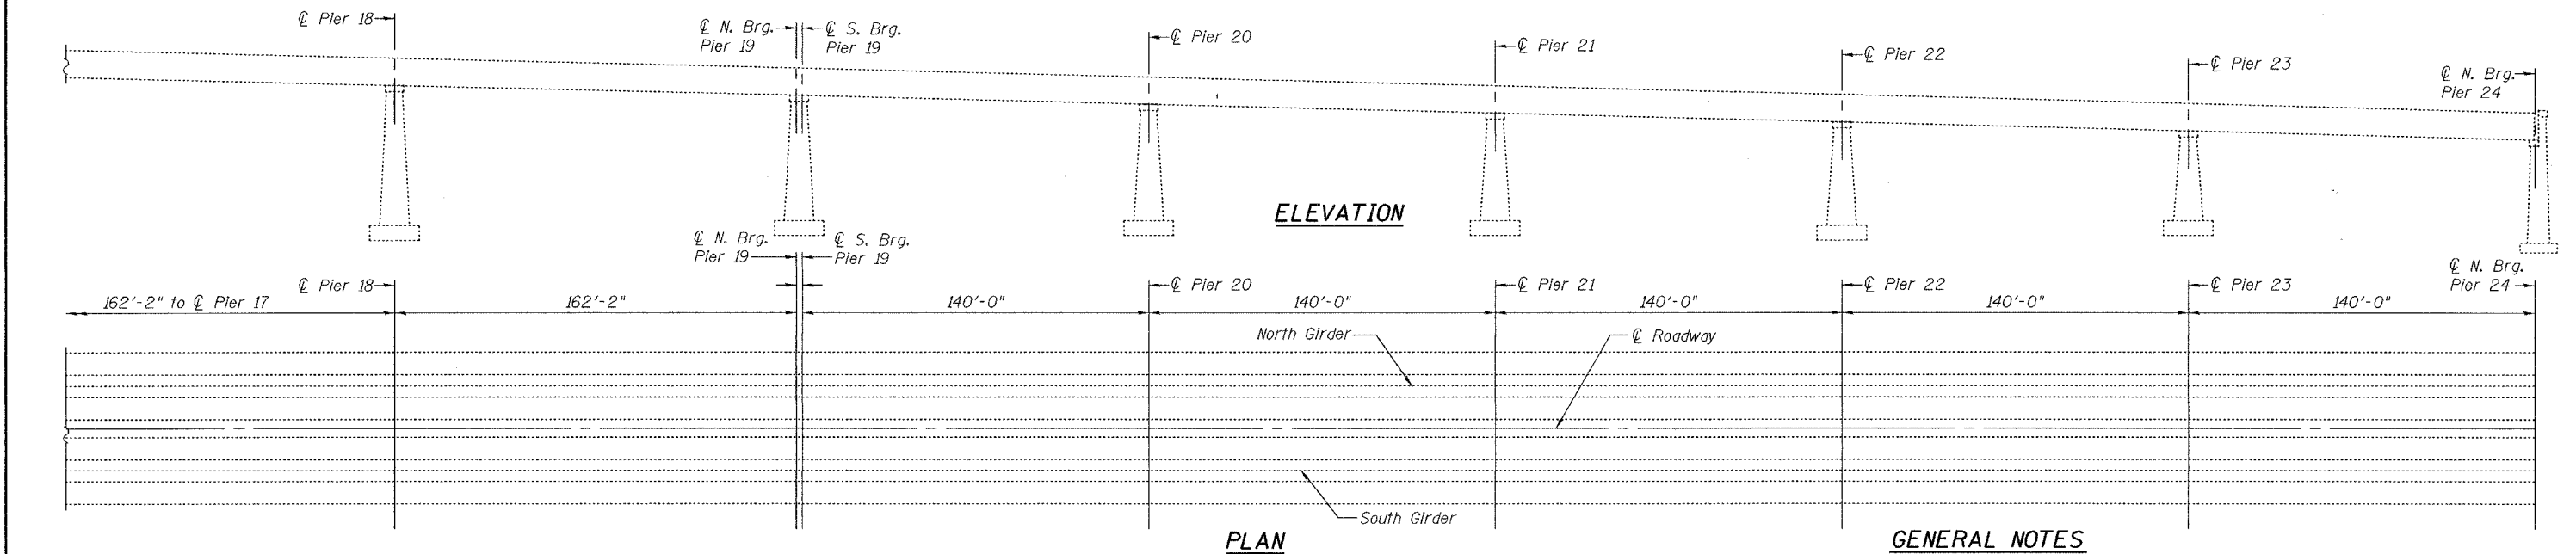
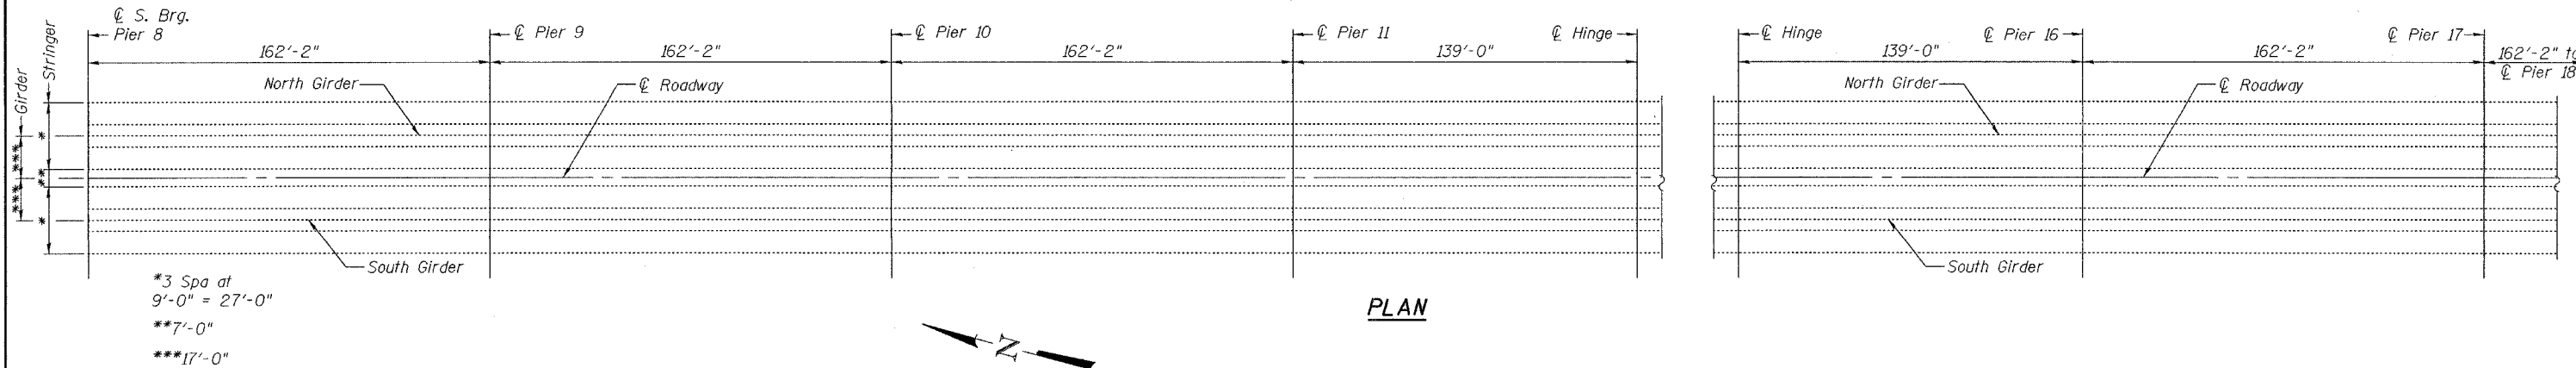


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	SHEET NO.	SHEET
		Rock Island	6	3
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

SHEET NO. 1
4 SHEETS
64803

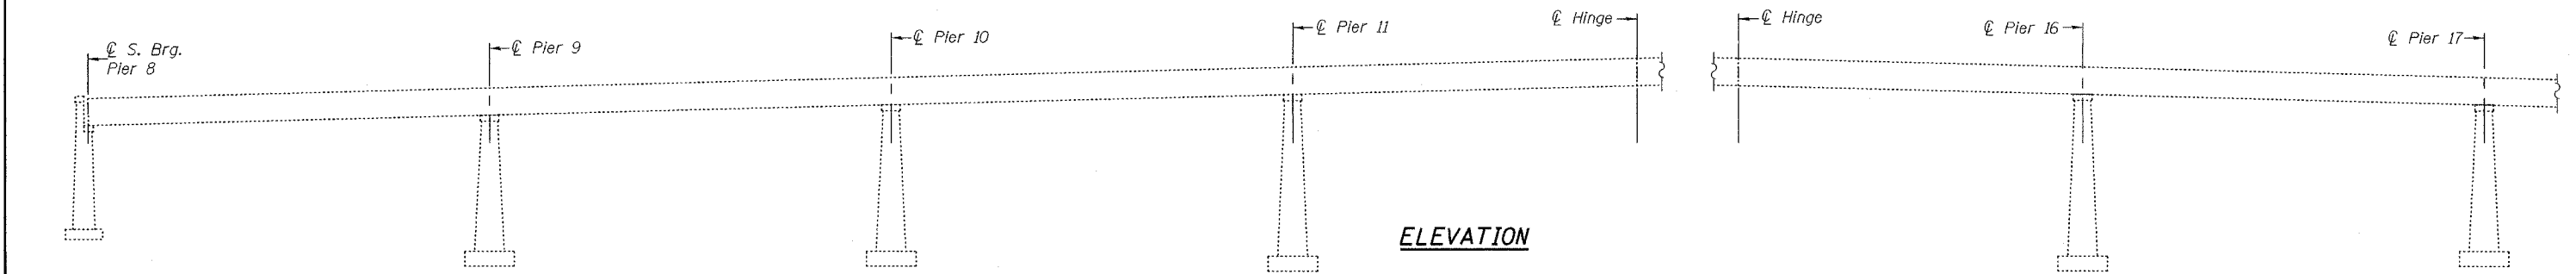

GENERAL NOTES

Plan dimensions and details relative to existing structure have been taken from existing plans and are subject to nominal construction variations. It shall be the Contractor's responsibility to verify such dimensions and details in the field and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

Cost of removal and/or re-installation of all members necessary to complete the work as detailed on the plans and as specified in the Special Provisions shall be included in the cost of Stiffener Intersection Modification.

Surfaces of existing steel exposed down to bare metal as a result of the removal and / or modification work shall be spot cleaned and painted with an aluminum epoxy mastic according to Article 506.05. The cost of this work shall be included with Stiffener Intersection Modification.

The existing structural steel coating contains lead. The Contractor should take appropriate precautions to deal with the presence of lead on this project.

BILL OF MATERIAL

ITEM	UNIT	QUANTITY
Stiffener Intersection Modification	Each	378

PLAN AND ELEVATION
F.A.I. RT. 80
ROCK ISLAND COUNTY
SN.081-0011

DESIGNED *Alvin T. Holloway*
CHECKED *W. S. Bink*
DRAWN *[Signature]*
CHECKED *ATH* *LSB*

AUGUST 31, 2004
EXAMINED *John A. Morris*
PASSED *Robert E. Andrews*
ENGINEER OF STRUCTURAL SERVICES
ENGINEER OF BRIDGES AND STRUCTURES

