


TREE REMOVAL & REPLACEMENT			
STATION	OFFSET	UNIT	
FULLERTON AVENUE			
76+70.82	35.42	LT	8
77+72.69	34.28	LT	8
78+00.18	34.61	LT	10
79+24.47	33.53	LT	2
79+56.56	34.13	LT	8
79+82.48	33.44	LT	2
80+70.42	33.43	LT	10
81+01.64	35.28	LT	4
82+22.50	39.97	RT	4
82+69.24	39.93	RT	4
83+87.89	88.14	LT	6
83+41.25	143.4	LT	8
82+49.30	92.82	LT	8
84+66.62	37.32	LT	8
85+08.79	36.55	LT	6
85+50.71	34.98	LT	6
85+91.57	34.36	LT	8
86+25.72	35.18	RT	2
87+79.18	38.32	LT	8
88+22.27	38.39	LT	10
LOMBARD ROAD			
65+79.71	31.34	RT	6
66+23.79	25.97	LT	6
68+65.87	31.71	RT	8
68+33.65	31.12	RT	8

NOTE:
TREES WILL BE REPLACED AT 1:1 RATIO
BY GINKGO BILOBA (GINKGO), 10' HEIGHT
CLUMP FORM, BALLED AND BURLAPPED

SYMBOL LEGEND

SIGNING:	
	EXISTING SIGN
	PROPOSED SIGN
STRIPING:	
	6" DASH LINE
	4" DASH LINE
	TURN ARROW AND ONLY (SEE DETAIL, SHEET NO. 65 FOR PLACEMENT) (SEE STATE STD. T80001-01 FOR DIMENSIONS)
	ONE-WAY RAISED REFLECTIVE PAVEMENT MARKER (YELLOW/OPAQUE)
	ONE-WAY RAISED REFLECTIVE PAVEMENT MARKER (WHITE/OPAQUE)
	TWO-WAY RAISED REFLECTIVE PAVEMENT MARKER (YELLOW/YELLOW)

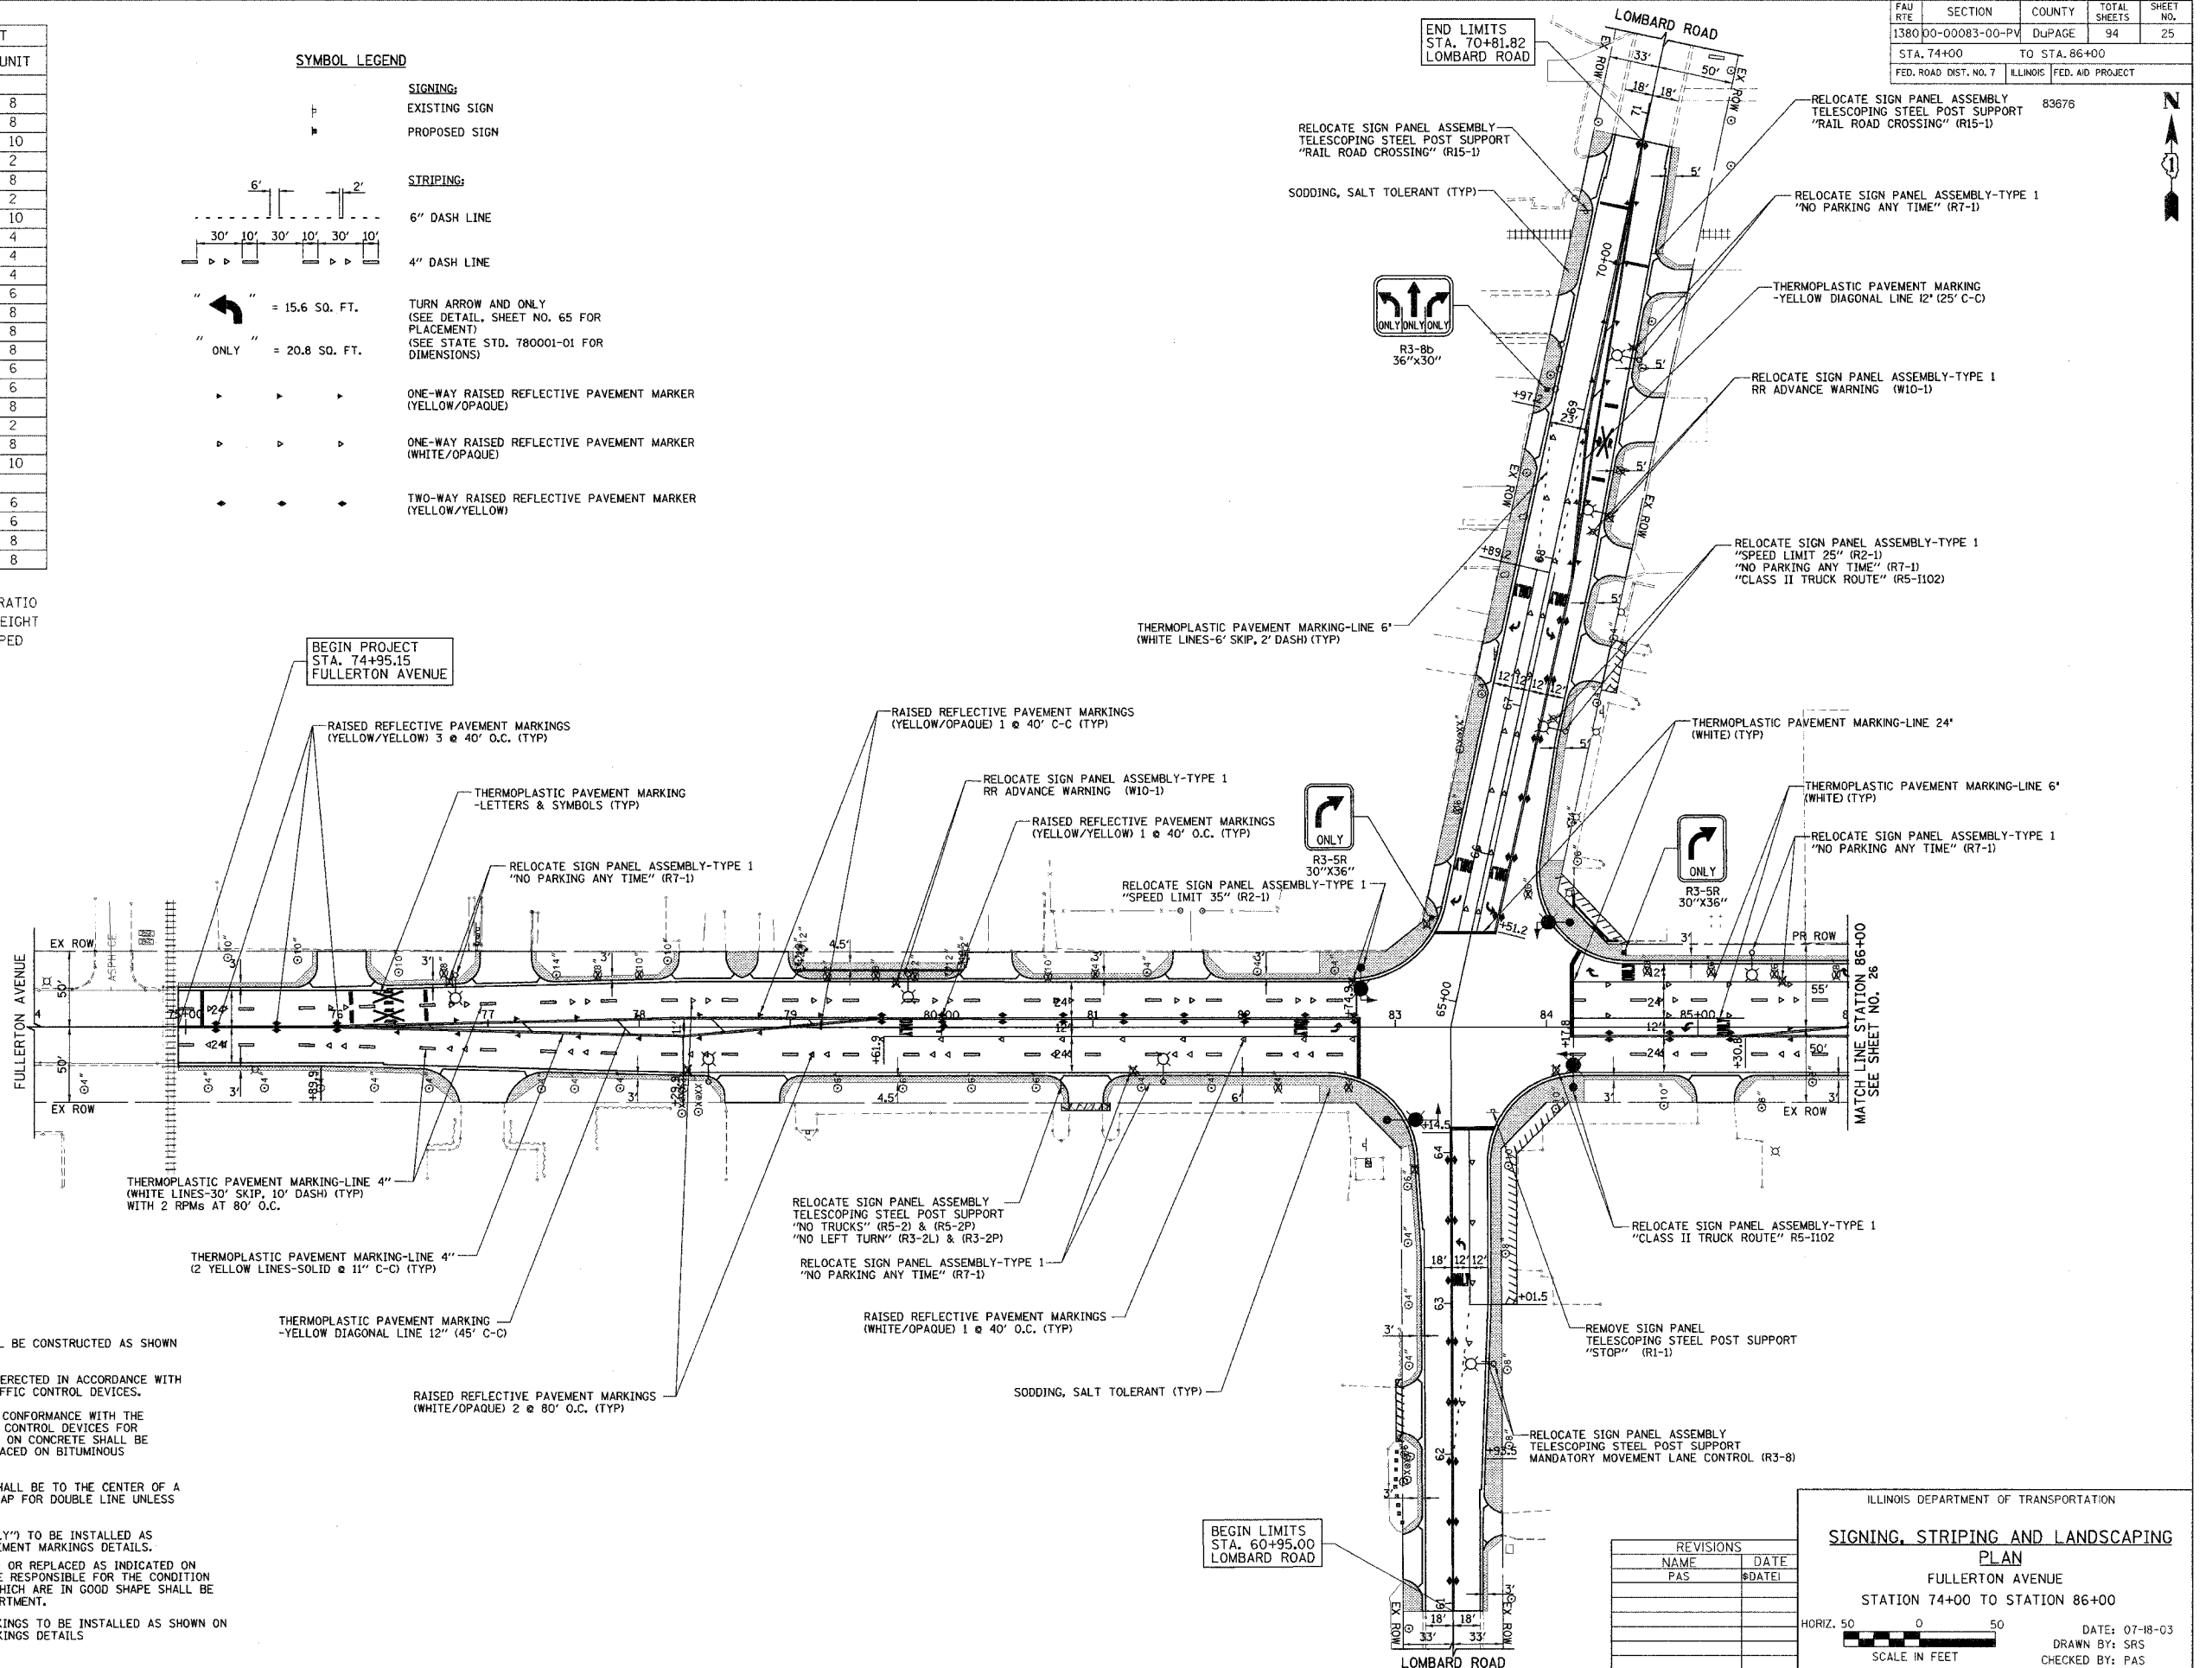

NOTES:

- ALL SIDEWALKS AND CURB RAMPS SHALL BE CONSTRUCTED AS SHOWN ON THE PLAN AND PROFILE SHEETS.
- ALL SIGNS SHALL BE FABRICATED AND ERECTED IN ACCORDANCE WITH THE ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
- ALL PAVEMENT MARKINGS SHALL BE IN CONFORMANCE WITH THE ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS. ALL MARKINGS ON CONCRETE SHALL BE PREFORMED PLASTIC. ALL MARKINGS PLACED ON BITUMINOUS SURFACES SHALL BE THERMOPLASTIC.
- DIMENSIONS TO PAVEMENT MARKINGS SHALL BE TO THE CENTER OF A SINGLE LINE OR THE CENTER OF THE GAP FOR DOUBLE LINE UNLESS OTHERWISE INDICATED.
- TURN LANE MARKINGS (ARROW AND "ONLY") TO BE INSTALLED AS SHOWN ON DISTRICT ONE TYPICAL PAVEMENT MARKINGS DETAILS.
- EXISTING SIGNS ARE TO BE RELOCATED OR REPLACED AS INDICATED ON THE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONDITION OF THE SIGNS. ALL SALVAGED SIGNS WHICH ARE IN GOOD SHAPE SHALL BE RETURNED TO THE PUBLIC WORKS DEPARTMENT.
- MEDIAN DIAGONAL LINE PAVEMENT MARKINGS TO BE INSTALLED AS SHOWN ON DISTRICT ONE TYPICAL PAVEMENT MARKINGS DETAILS.

REVISIONS	
NAME	DATE
PAS	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGNING, STRIPING AND LANDSCAPING

PLAN

FULLERTON AVENUE

STATION 74+00 TO STATION 86+00

HORIZ. 50 0 50
SCALE IN FEET

DATE: 07-18-03
DRAWN BY: SRS
CHECKED BY: PAS