


FAU RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
138000-00083-00-PV	DJ PAGE	94	46	
STA.	TO STA.			
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

83676

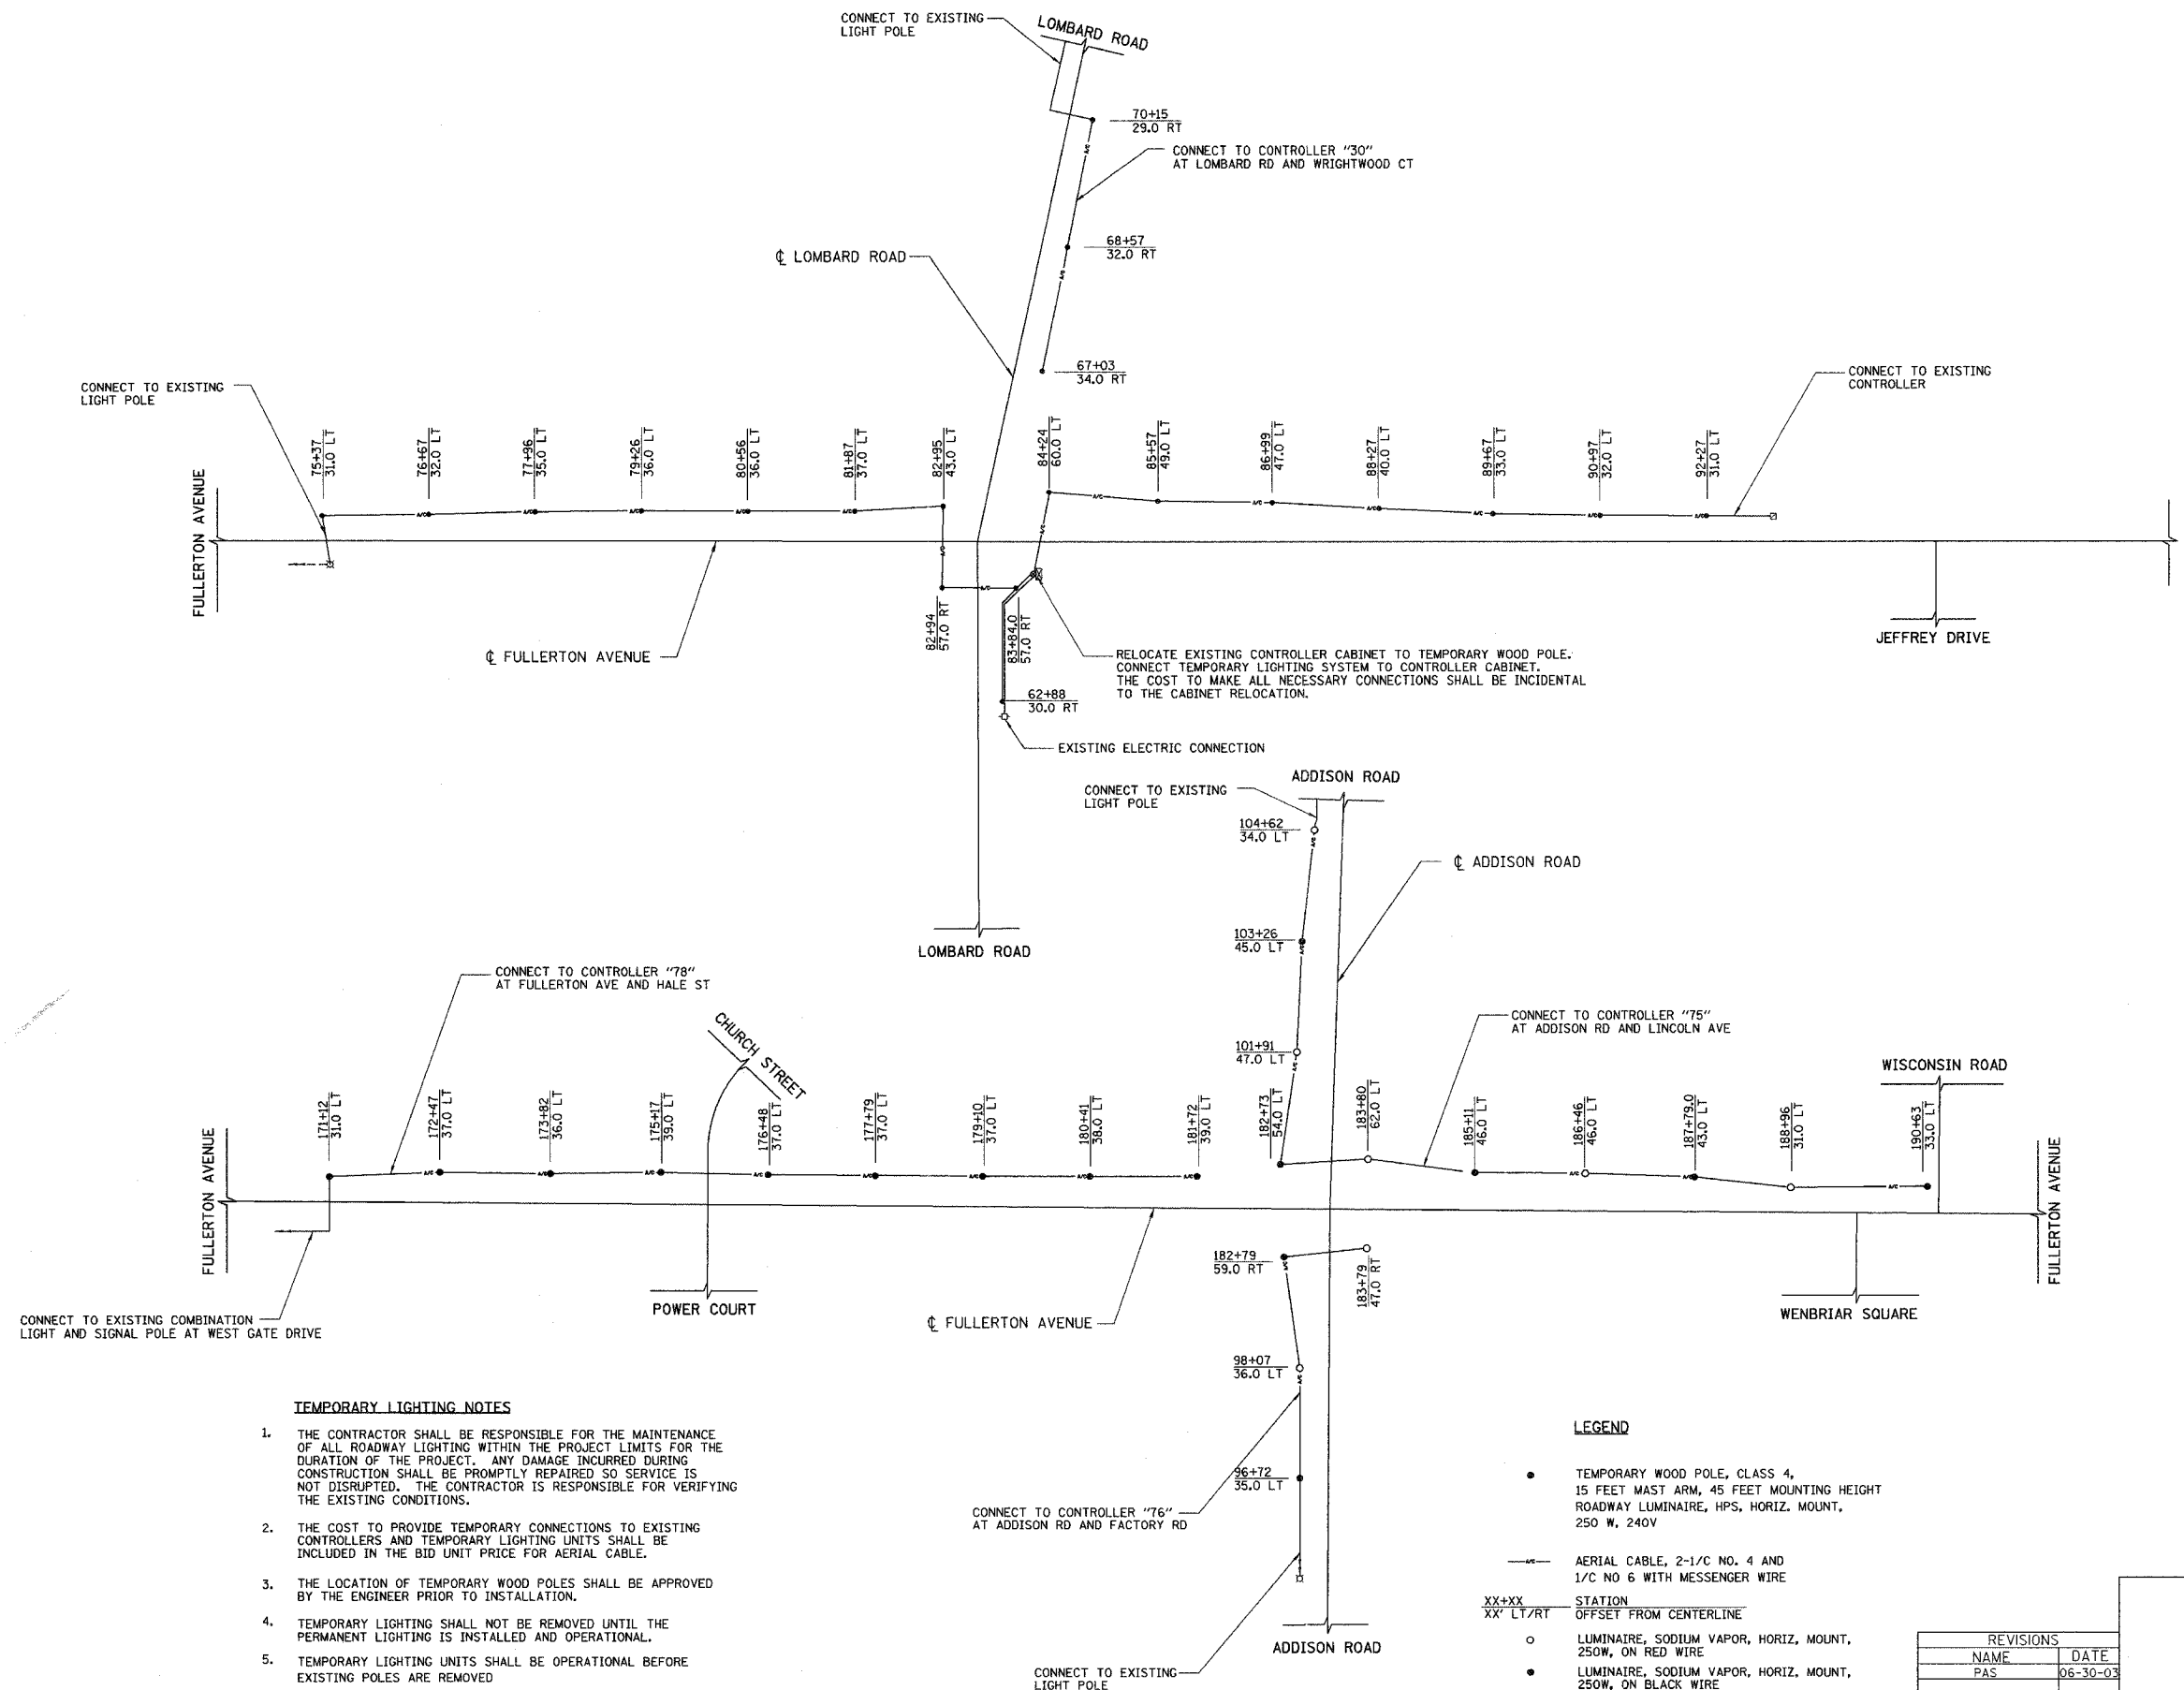

TEMPORARY LIGHTING NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE MAINTENANCE OF ALL ROADWAY LIGHTING WITHIN THE PROJECT LIMITS FOR THE DURATION OF THE PROJECT. ANY DAMAGE INCURRED DURING CONSTRUCTION SHALL BE PROMPTLY REPAIRED SO SERVICE IS NOT DISRUPTED. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE EXISTING CONDITIONS.
2. THE COST TO PROVIDE TEMPORARY CONNECTIONS TO EXISTING CONTROLLERS AND TEMPORARY LIGHTING UNITS SHALL BE INCLUDED IN THE BID UNIT PRICE FOR AERIAL CABLE.
3. THE LOCATION OF TEMPORARY WOOD POLES SHALL BE APPROVED BY THE ENGINEER PRIOR TO INSTALLATION.
4. TEMPORARY LIGHTING SHALL NOT BE REMOVED UNTIL THE PERMANENT LIGHTING IS INSTALLED AND OPERATIONAL.
5. TEMPORARY LIGHTING UNITS SHALL BE OPERATIONAL BEFORE EXISTING POLES ARE REMOVED
6. FOR TEMPORARY LIGHT POLE DETAILS SEE SHEET NO.53

LEGEND

- TEMPORARY WOOD POLE, CLASS 4, 15 FEET MAST ARM, 45 FEET MOUNTING HEIGHT ROADWAY LUMINAIRE, HPS, HORIZ. MOUNT, 250 W, 240V
- AERIAL CABLE, 2-1/C NO. 4 AND 1/C NO 6 WITH MESSENGER WIRE
- XX+XX STATION
XX' LT/RT OFFSET FROM CENTERLINE
- LUMINAIRE, SODIUM VAPOR, HORIZ. MOUNT, 250W, ON RED WIRE
- LUMINAIRE, SODIUM VAPOR, HORIZ. MOUNT, 250W, ON BLACK WIRE
- EXISTING HANDHOLE
- ⊕ EXISTING LIGHT POLE

REVISIONS	
NAME	DATE
PAS	06-30-03

ILLINOIS DEPARTMENT OF TRANSPORTATION

TEMPORARY LIGHTING PLAN

FULLERTON AVENUE

SCALE: NONE

DATE: 07-18-03
DRAWN BY: SRS
CHECKED BY: SRF