


REL.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	**	WHITE	77	8
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT NO.	

- FAI 64 (I-64)
 - D-7 BRIDGE DECK REPAIRS FY 2005
- CONTRACT NO. 94861

GUARDRAIL SCHEDULE										
	GUARDRAIL REMOVAL	STEEL PLATE BEAM GUARDRAIL, TYPE A	REMOVE AND REPLACE STEEL PLATE BEAM GUARDRAIL, RAIL ELEMENT	TRAFFIC BARRIER TERMINAL TYPE 1, SPECIAL (TANGENT)	TRAFFIC BARRIER TERMINAL, TYPE 2	TRAFFIC BARRIER TERMINAL, TYPE 8	TRAFFIC BARRIER TERMINAL, TYPE 10	TERMINAL MARKER - DIRECT APPLIED	GUARDRAIL MARKERS, TYPE A	AGGREGATE SHOULDERS, TYPE B
LOCATION	FEET	FEET	FOOT	EACH	EACH	EACH	EACH	EACH	EACH	TON
097-0003										
Northwest Corner	150	337.5	50	1	0	0	0	1	5	7.5
Southwest Corner	312.5	337.5	50	1	0	0	0	1	5	7.5
Northeast Corner	0	237.5	0	1	0	1	0	1	3	7.5
Southeast Corner	0	0	0	0	0	0	0	0	0	0
TOTAL	462.5	912.5	100	3	0	1	0	3	13	22.5
097-0004										
Northwest Corner	137.5	137.5	0	0	1	0	1	0	2	0
Southwest Corner	0	600	0	1	0	1	0	1	8	7.5
Northeast Corner	0	0	25	0	0	0	0	0	0	0
Southeast Corner	0	0	25	0	0	0	0	0	0	0
TOTAL	137.5	737.5	50	1	1	1	1	1	10	7.5

NOTE: PROPOSED GUARDRAIL LOCATED IN THE NORTHWEST CORNER OF STRUCTURE 097-0003 AND THE SOUTHWEST CORNER OF STRUCTURE 097-0004 MUST BE INSTALLED PRIOR TO OPENING CROSSOVERS TO TRAFFIC.

PAVEMENT MARKING SCHEDULE								
STATION TO STATION	PAVEMENT MARKING REMOVAL	WORK ZONE PAVEMENT MARKING REMOVAL	EPOXY PAVEMENT MARKING LINE - 4"	EPOXY PAVEMENT MARKING LINE - 6"	SHORT TERM PAVEMENT MARKING	TEMPORARY PAVEMENT MARKING LINE - 4"	TEMPORARY PAVEMENT MARKING LINE - 6"	RAISED REFLECTIVE PAVEMENT MARKER (BRIDGE)
	SQ FT	SQ FT	FOOT	FOOT	FOOT	FOOT	FOOT	EACH
STAGE I								
5835+80 TO 5875+28	477.0	2298.7						34.0
5875+28 TO 5902+32	1802.7	0.0						
5902+32 TO 5919+78	178.0	1216.7						
STAGE II								
5850+85 TO 5875+28	492.0	2175.0						34.0
5875+28 TO 5902+32	0.0	0.0						
5902+32 TO 5931+55	172.7	1284.7						
FINAL STAGE								
5835+80 TO 5875+28		370.7	15792.0	1980.0	1112.0	15792.0	1980.0	
5875+28 TO 5902+32		256.0	10816.0	1360.0	768.0	10816.0	1360.0	
5902+32 TO 5931+55		277.3	11692.0	1480.0	832.0	11692.0	1480.0	
TOTALS =	3122.0	7879.0	38300.0	4820.0	2712.0	38300.0	4820.0	68.0

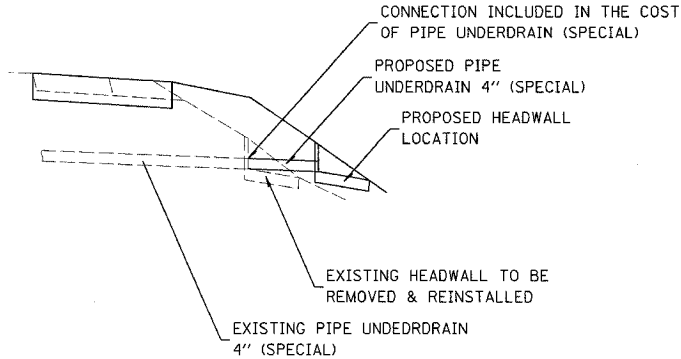

MEDIAN SUBSURFACE DRAIN EXTENSION
DETAIL AT CROSSOVER

TABLE OF QUANTITIES		
LOCATION	PIPE UNDERDRAIN 4 " (SPECIAL) FOOT	REMOVE & REINSTALL CONCRETE HEADWALL FOR PIPE DRAINS
LT. 5863+29	5	1
RT. 5863+29	5	1
TOTAL	10	2

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF
QUANTITIES

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY