


Alternative #2014-1 (Preferred)

Provided Level of Protection:	TBD
Project Goals	Achieved?
• Provide 2ft. freeboard between 50-year high water elevation and low inlet grade at underpass.	TBD
• No more than 4in. of flooding in the underpass during the 100-year storm event.	TBD
• Locate the new pump station outside of the proposed future right-of-way limits shown in the Strategic Regional Arterial (SRA) report for US Route 41.	TBD
• No increase in peak flows to the Skokie River.	TBD
Preliminary Estimate of Costs:	TBD

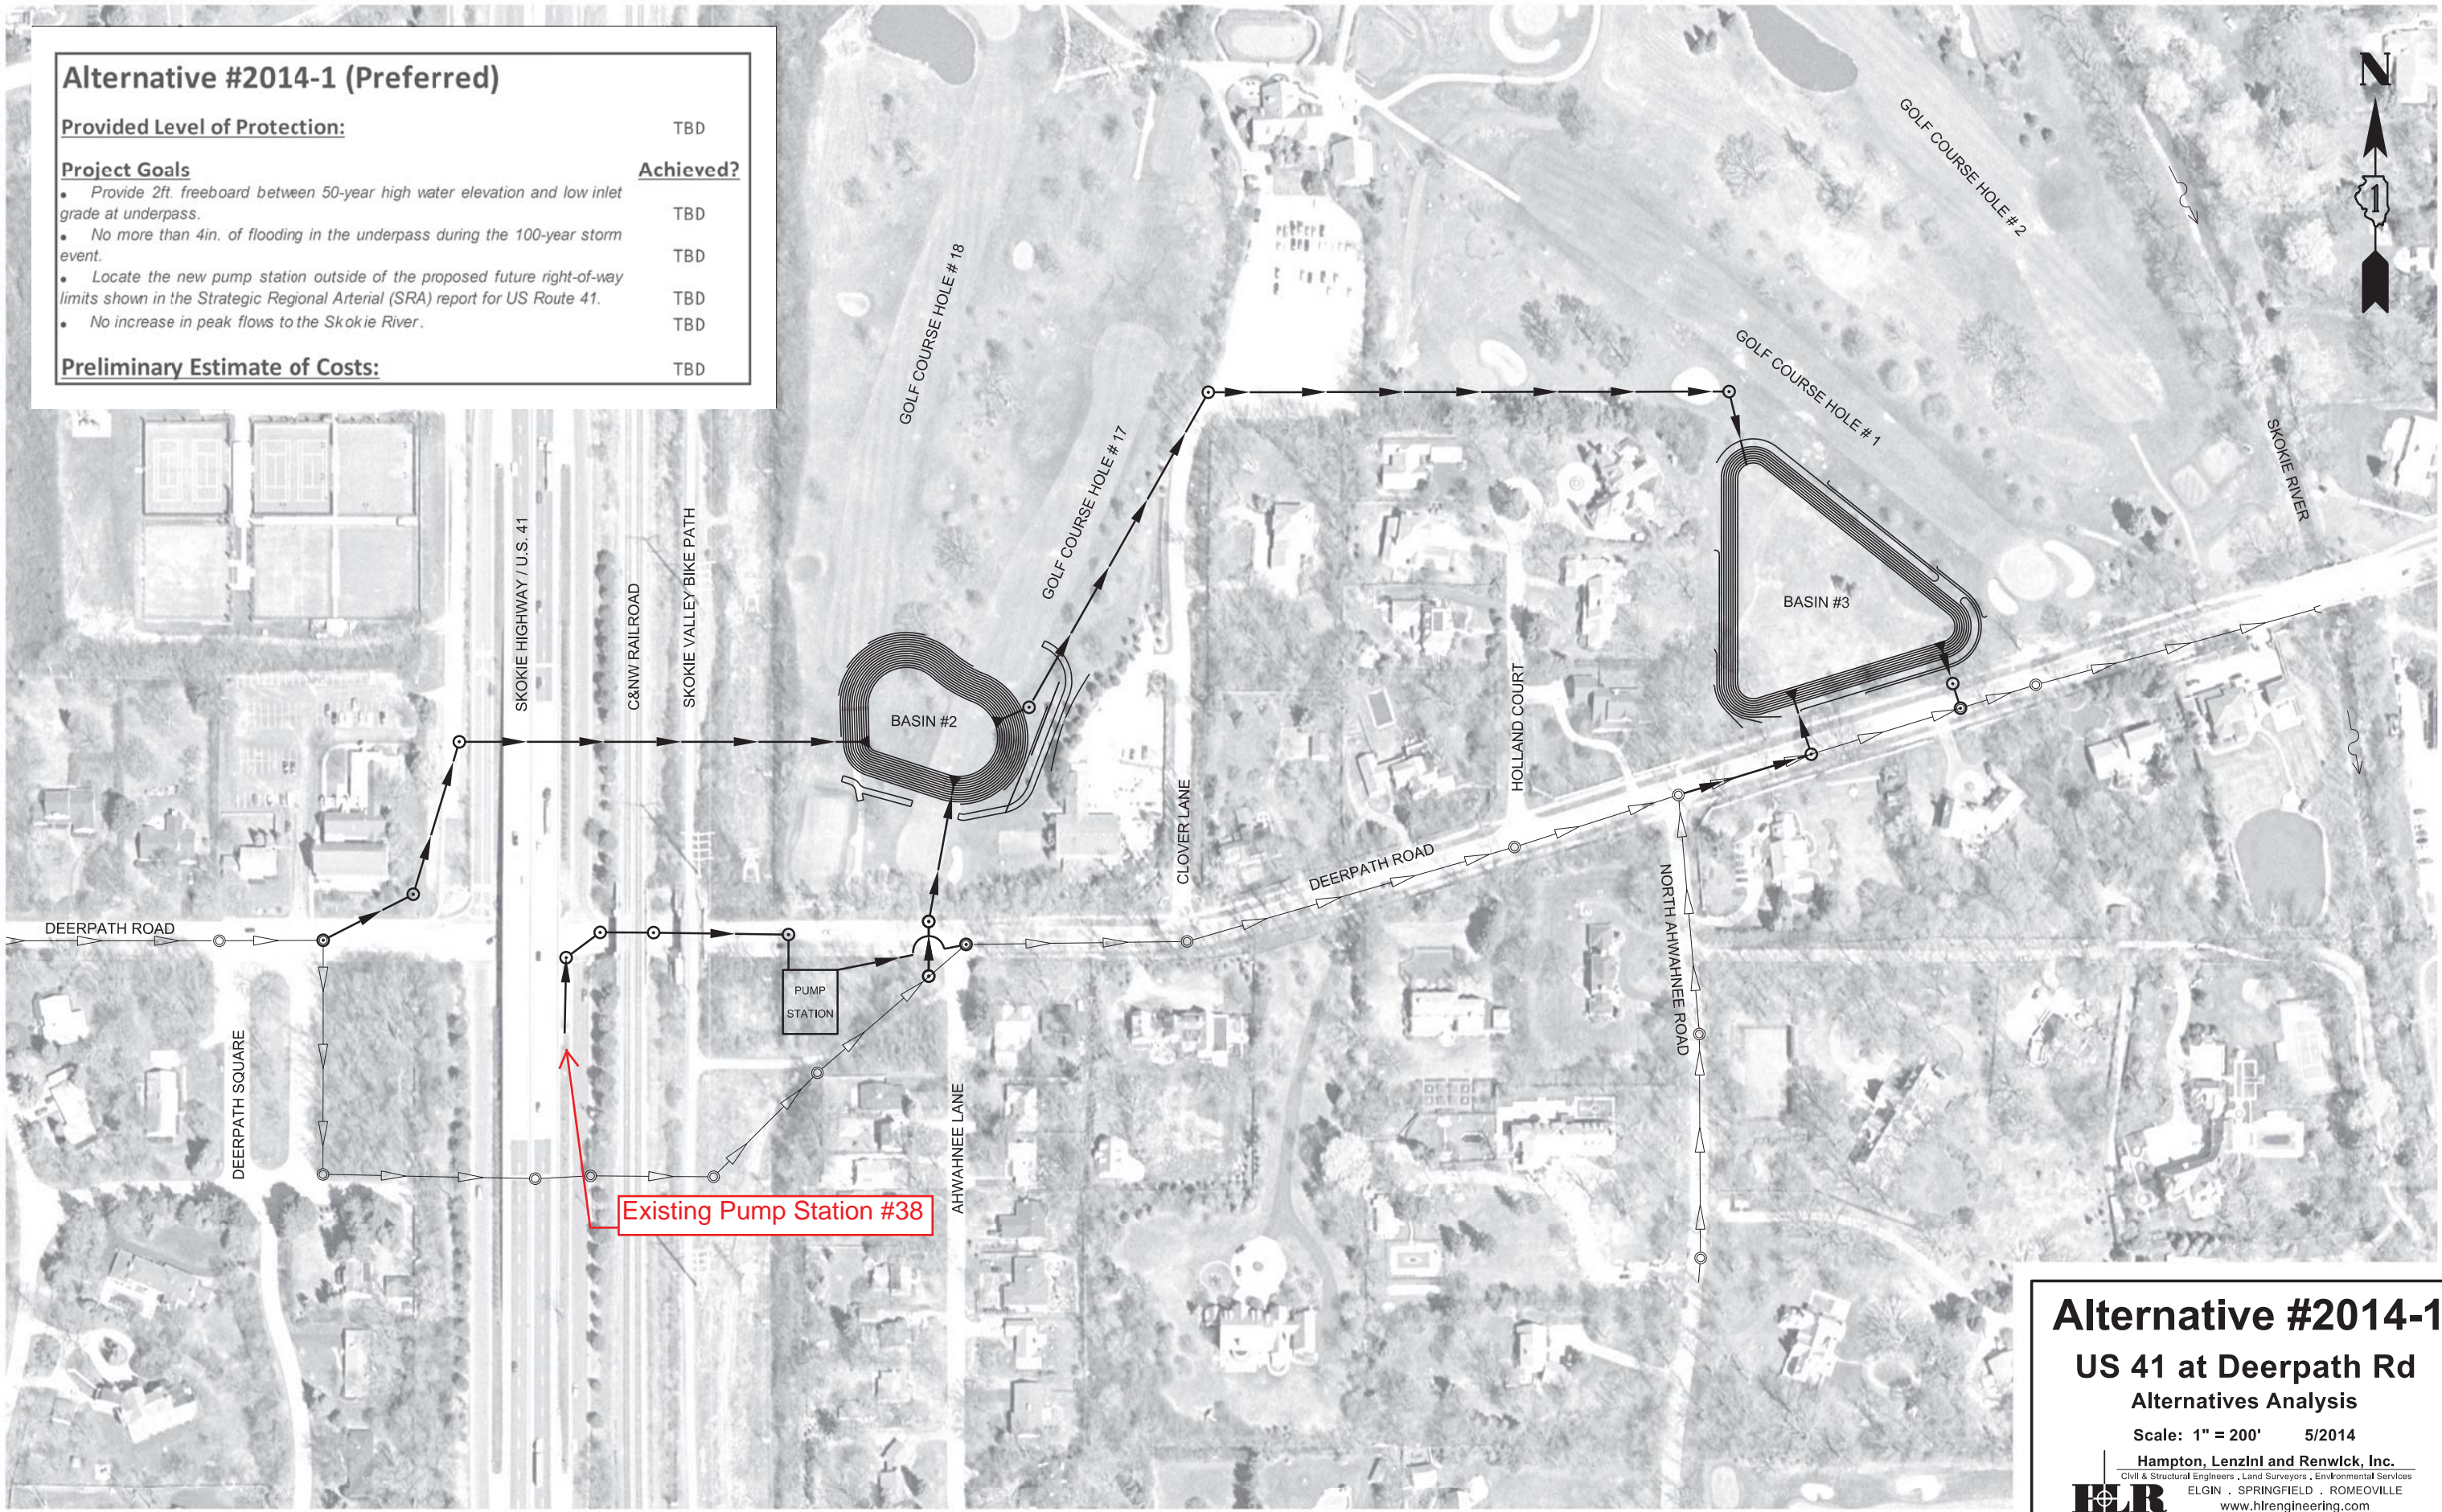

Alternative #2014-1

US 41 at Deerpath Rd  
Alternatives Analysis

Scale: 1" = 200' 5/2014

Hampton, Lenzini and Renwick, Inc.  
Civil & Structural Engineers, Land Surveyors, Environmental Services  
ELGIN • SPRINGFIELD • ROMEOVILLE  
www.hltreengineering.com

