NOTE: DISTANCES SHALL BE PROVIDED BY IDOT DISTRICT 4 OPERATIONS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(34-6,55-1)	HANCOCK/ McDONOUGH	433	246
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STATE CONTRACT NO. 68206

SIGN DETAIL
1:10

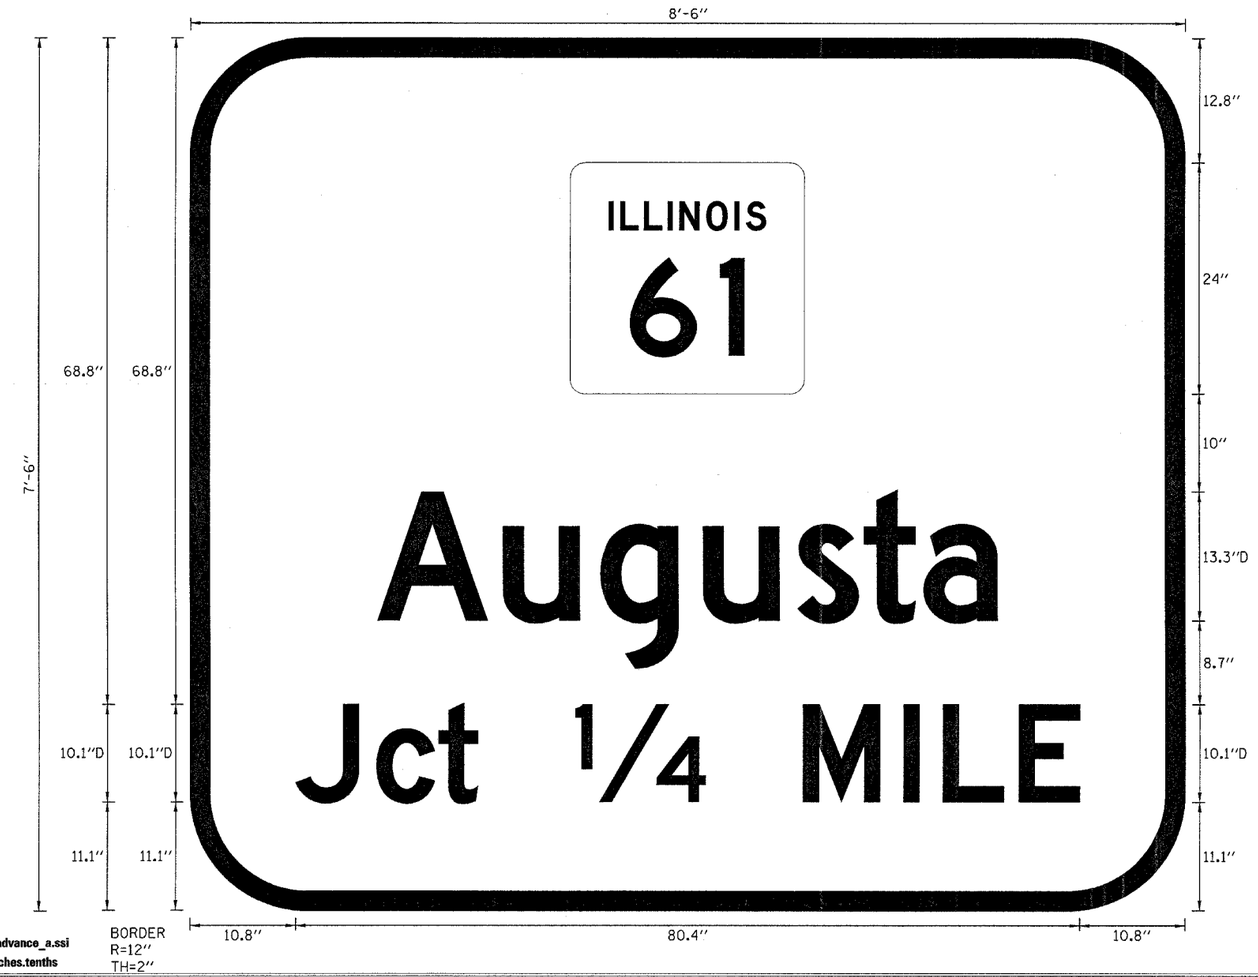

SIGN NUMBER	Advance Guide Sign
WIDTH x HGHT.	8'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/Pure White

SYMBOL	ROT	X	Y	WID	HT
M124_2	0	39	53.3	24	24

Panel Style: guide_exp_advance_a.ssi
Dimensions are in inches.tenths

Letter spacings are to start of next letter

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
	A	u	g	u	s	t	a																																D 2000
19.2	12.9	10	10.5	9.7	6.8	6.1	7.6	19.2																														63.6	13.3/9.7
	J	c	t		1/4		M	I	L	E																													D 2000
10.8	8.3	6.4	4	10	13.3	10	10.3	4	7.8	6.3	10.8																											80.4	10.1/7.4

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGN PANEL STANDARDS
SHEET 7 OF 14

SCALE: VERT. N/A HORIZ. N/A
DATE 6/21/04
DRAWN BY BDS
CHECKED BY SRD

Plot Date: 7/19/2006
Plot Time: 10:27:10 AM
Plotted By: bschmidt
Pen Table: idot.tbl
Filename: I:\03033\Cad\T\Construction_Plans\223_DetailsSignPanel.dgn