ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
C.H. 5	03-00260-00-BR	CLARK	10	2
FED. ROAD DIST. NO. 7		ILLINOIS	FED. AID PROJECT-	

91307

SUMMARY OF QUANTITIES
CONSTRUCTION TYPE CODE XO80-2A

CODE NO.	ITEM	UNIT	QUANTITY
20300100	CHANNEL EXCAVATION	CU YD	700
28101700	* RIPRAP, SPECIAL	TON	240
50100100	REMOVAL OF EXISTING STRUCTURES	EACH	1
50300225	CONCRETE STRUCTURES	CU YD	33.5
50400505	PRECAST PRESTRESSED CONCRETE DECK BEAMS (27" DEPTH)	SQ FT	3,645
50800105	REINFORCEMENT BARS	POUND	4,540
50900205	STEEL RAILING, TYPE S1	FOOT	270
51201000	FURNISHING METAL PILE SHELLS 12"	FOOT	700
51202600	DRIVING AND FILLING SHELLS	FOOT	700
51203200	TEST PILE METAL SHELLS	EACH	2
51500100	NAME PLATES	EACH	1
X5020501	* UNDERWATER STRUCTURE EXCAVATION PROTECTION – LOCATION 1	EACH	1
X5020502	* UNDERWATER STRUCTURE EXCAVATION PROTECTION – LOCATION 2	EACH	1

* SEE SPECIAL PROVISIONS

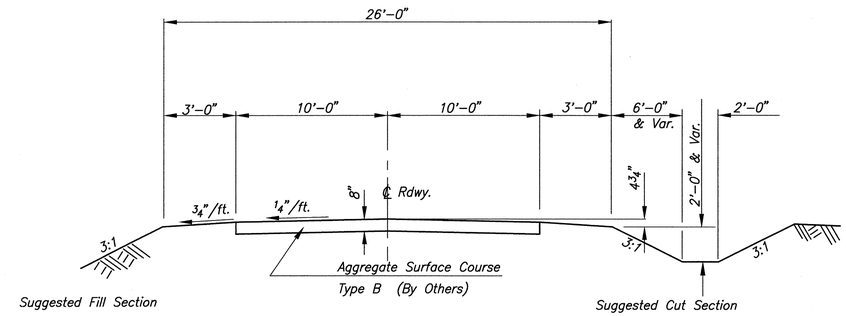

Road Classification: Local Road 0–250 ADT
Current ADT less than 150

TYPICAL CROSS SECTION

(To be constructed by County)

Seeding will be performed by others in accordance with the State of Illinois Standard Specifications

SHEET TITLE
SUMMARY OF QUANTITIES
& TYPICAL CROSS SECTION

PROJECT
SECTION 03-00260-00-BR
COUNTY HIGHWAY 5
CLARK COUNTY
STATON 10+00

PROJECT NO. 03007
SCALE
DATE 10-29-03
DRAWN BY MRL
CHECKED BY MCB
DRAWING NO. 2 OF 10 SHTS

COOMBE-BLOXDORF P.C.
Engineers / Land Surveyors
Springfield, Illinois
Design Firm License No. 184-002703

SHEET2.DWG