F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
614	(*)	MORGAN	200	1
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT-**		

(*) 147(RS-5, B-1, B-2) 92656

**ACF-0614(023)

D-96-525-94

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	GENERAL NOTES
3 – 12	SUMMARY OF QUANTITIES
13 – 30	SCHEDULE OF QUANTITIES
31 – 39	TYPICAL SECTIONS
40 – 45	ALIGNMENTS, TIES & BENCHMARKS
46 – 52	STAGING PLAN
53 – 77	PLAN AND PROFILES
78	PLAN AND PROFILES – SCENIC DRIVE
79–85	SOIL EROSION AND SEDIMENT CONTROL PLANS
86 – 97	BRIDGE PLANS (IL 78 OVER FORK OF INDIAN CREEK)
98 – 109	BRIDGE PLANS (IL 78 OVER LITTLE INDIAN CREEK)
110 – 114	BOX CULVERT DETAILS
115	CONC. COLLAR AND CULVERT EXTENSION DETAILS
116	BIT. RAMP AND BUTT JOINT DETAIL
117 – 120	ENTRANCE AND SIDEROAD DETAILS
121 – 123	TYPE A GUTTER, (MODIFIED) DETAILS
124	SLOPE BENCHING DETAIL
125 – 128	MISCELLANEOUS DETAILS
129 – 191	MAINLINE CROSS SECTIONS
192 – 195	SIDE ROAD CROSS SECTIONS
196 – 200	CROSS ROAD CULVERT CROSS SECTIONS

IDOT HIGHWAY STANDARDS

000001–04	515001–02	635006–02	701201–01	704001–01
001001	542201	635011–01	701301–01	780001–01
280001–02	542301	666001	701306	781001–02
406201	542401	667101	701311–02	BLR 21–6
420401–04	609006–02	701001	701321–06	BLR 22–4
442201–01	630001–04	701006–01	701326–01	BLR 23–1
482001	630301–02	701011	702001–03	
503001–01	631031–04			

SCALES

PLAN / PROFILE HORIZ. (1:500) — 5 m 0 20 m
PROFILE VERT. (1:50) — 1 m 0 2 m
CROSS SECTIONS HORIZ. (1:100) — 0 5 m 10 m
CROSS SECTIONS VERT. (1:50) — 1 m 0 2 m

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES, REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES, IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

CALL **J.U.L.I.E.** (JOINT UTILITY LOCATION INFORMATION FOR EXCAVATORS)
48 Hours (2 working days) Before You Dig.
TOLL FREE: 1 (800) 892—0123

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

PLANS FOR PROPOSED FEDERAL AID HIGHWAY

F.A.P. 614 (IL 78)
SECTION 147 (RS–5,B–1,B–2)
PROJECT NO. ACF –0614(023)
CASS AND MORGAN COUNTY
C–96–544–04

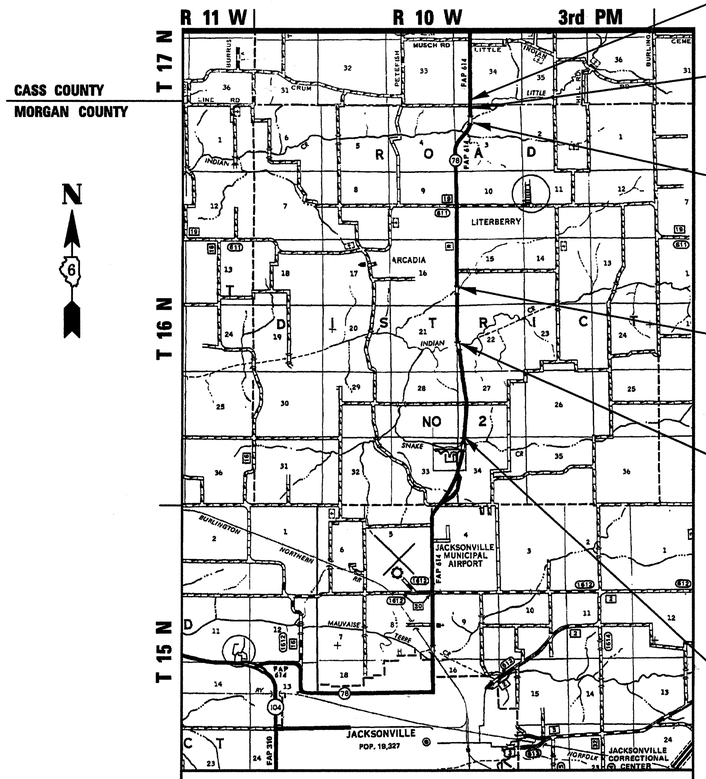

LOCATION MAP

IMPROVEMENT ENDS
STA 0+100.000

STATION EQUATION
STA 19+370.535 BK =
STA 0+000.000 AH

PROPOSED STRUCTURE
S.N. 069–0502
STA. 18+980.000

PROPOSED STRUCTURE
S.N. 069–0503
STA. 14+816.750

BRIDGE OMISSION
STA. 13+394.301 TO
STA 13+468.600
INDIAN CREEK
SN 069–0003

IMPROVEMENT BEGINS
STA 11+075.000

APPROXIMATE SCALE 0 2 5 KM

GROSS LENGTH OF IMPROVEMENT = 8395.535 METER / 8.396 KM
BRIDGE OMISSION = 74.299 METER / 0.074 KM
NET LENGTH OF IMPROVEMENT = 8321.236 METER / 8.322 KM
HIGHWAY CLASSIFICATION – MINOR ARTERIAL
ADT = 2350 (2002) % TRUCKS = 7%

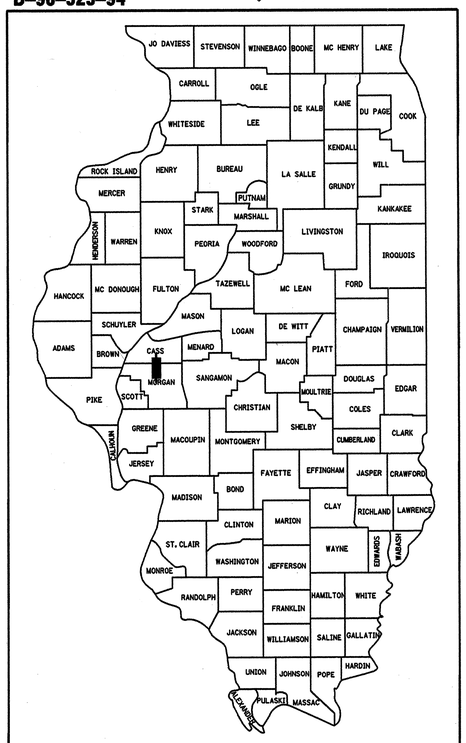

LOCATION OF SECTION INDICATED THUS:

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED January 16 20 04
Clint M. Reed
DISTRICT ENGINEER

20
ENGINEER OF PROJECT DEVELOPMENT AND IMPLEMENTATION

January 30, 20 04
Michael T. Klein
ENGINEER OF DESIGN AND ENVIRONMENT

January 30 20 04
Christine A. Morden
DIRECTOR, DIVISION OF HIGHWAYS

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

CONTRACT NO. 92656

PROJECT ENGINEER: JOHN NEGANGARD (217) 782-6990
SQUAD LEADER: COLLEEN ATCHISON (217) 785-2739