2A

UN047
TOTAL SHEETS: 10

UNIVERSITY OF ILLINOIS INSTITUTE OF AVIATION

CONSTRUCTION PLANS FOR

UNIVERSITY OF ILLINOIS - WILLARD AIRPORT

ILLINOIS PROJECT CMI-3662
A. I. P. PROJECT 3-17-0016-23

REMARK RUNWAY THRESHOLDS

JANUARY 12, 2007

INDEX TO SHEETS

1	COVER SHEET
2	AIRPORT SITE PLAN
3	CONSTRUCTION ACTIVITY PLAN PHASE 1
4	CONSTRUCTION ACTIVITY PLAN PHASE 2
5	CONSTRUCTION ACTIVITY PLAN PHASE 3
6	REMOVAL AND REPLACEMENT PLAN–RUNWAY 14L/32R
7	REMOVAL AND REPLACEMENT PLAN–RUNWAY 4/22
8	REMOVAL AND REPLACEMENT PLAN–RUNWAY 18/36
9	PAVEMENT MARKING DETAILS
10	PAVEMENT MARKING AND REMOVAL DETAILS

SUMMARY OF QUANTITIES

ITEM	DESCRIPTION	UNIT	QUANITY
AR620900	PAVEMENT MARKING REMOVAL	SF	47,970
AR800244	INITIAL COAT APPLICATION	SF	28,436
AR800245	TOP COAT APPLICATION	SF	73,386

CALL J.U.L.I.E.
BEFORE EXCAVATING
1–800–892–0123

UNIVERSITY OF ILLINOIS – WILLARD AIRPORT

TOWNSHIP: T 18 N
RANGE: R 8 E
TOWNSHIP: TOLONO
COUNTY: CHAMPAIGN

RUNWAY 14L/32R
GEOMETRIC DESIGN DATA

DESIGN GROUP – GROUP IV
WINGSPAN – UP TO BUT NOT INCLUDING 171 FT.
DESIGN APPROACH CATEGORY – C

RUNWAY 4/22
GEOMETRIC DESIGN DATA

DESIGN GROUP – GROUP III
WINGSPAN – UP TO BUT NOT INCLUDING 118 FT.
DESIGN APPROACH CATEGORY – C

FILE:K:\Champaign\AP\Remark\Thresholds\DRAW\SHEETS\01_UOFCOV.dwg
CREATED:09/17/01
MODIFIED:11/11/2006
SCALE: 1=HTS
PLOT #:
LAST UPDATE:

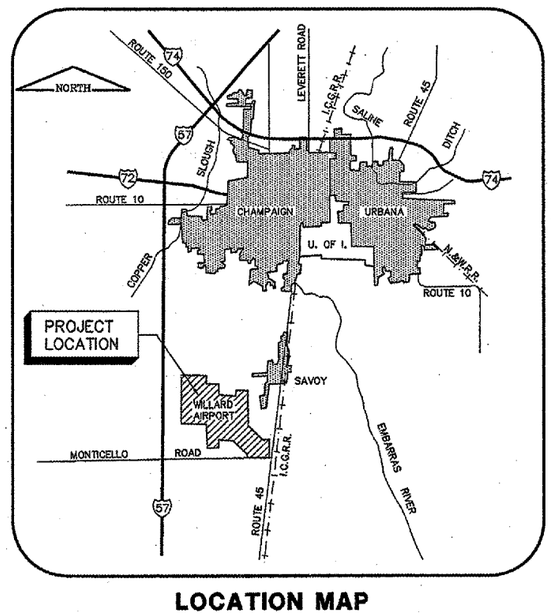

LOCATION MAP

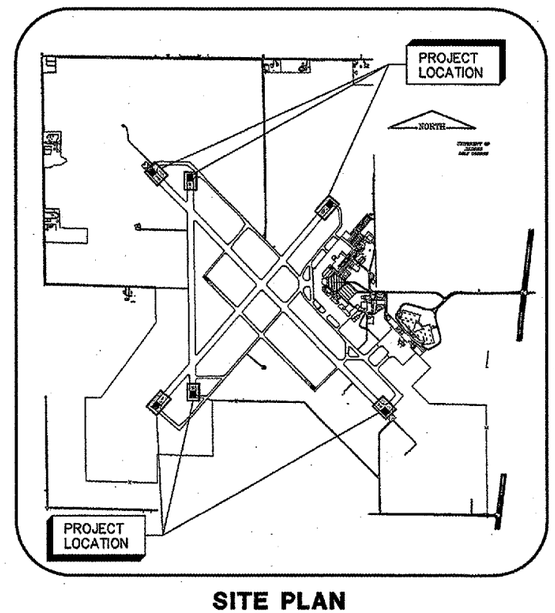

SITE PLAN

01/16/07
SEAN M. SMITH
062-057637
LICENSED
PROFESSIONAL ENGINEER OF ILLINOIS
EXPIRES 11-30-2007

GROUND CONTROL RADIO FREQUENCY – 121.8
ATIS FREQUENCY – 124.85
MAXIMUM HEIGHT OF EQUIPMENT ABOVE GROUND IS 25 FT.

UNIVERSITY OF ILLINOIS
WILLARD AIRPORT

APPROVED _____
DATE 12 January 2007

CMT
CRAWFORD MURPHY & TILLY, INC.
CONSULTING ENGINEERS
License No. 184–000613

SUBMITTED BY _____
DATE January 16 2007
CM&T JOB NUMBER 06059–04–00